



Pan-European Atlas of Sustainable Geo-Energy Capacities

Version: v2.0, May 20th, 2026

Project	101075609 — GSEU — HORIZON-CL5-2021-D3-02
Geothermal energy & Underground storage inventory	
Online Pan-European Atlas of Sustainable Geo-Energy Capacities	
Task lead/Co-lead	Instituto Geológico y Minero de España-Consejo Superior de Investigaciones Científicas (IGME-CSIC) Institut Cartogràfic i Geològic de Catalunya (ICGC) Laboratório Nacional de Energia e Geologia (LNEG)
Authors	GSEU WP3 Team (2025): 35 geological survey contributors

Task lead/Co-lead and affiliation

Paula Canteli, PhD (IGME-CSIC)
Jesús García-Crespo (IGME-CSIC)
Evelyn Carrión Ocaña (IGME-CSIC)
Ignasi Herms, PhD (ICGC)
Norbert Caldera, PhD (ICGC)
Georgina Arnó (ICGC)
Montse Colomer (ICGC)
Elsa Ramalho, PhD (LNEG)
João Carvalho, PhD (LNEG)

E-mail of contact

garcia.crespo@igme.es
Ignasi.herms@icgc.cat

CO₂ storage special contribution:

Ceri Vincent (BGS)
Maxine Akhurst, PhD (BGS)
Karen Kirk (BGS)
Jennifer Bow (BGS)

This report is part of the Geological Service for Europe (GSEU) Project that has received funding by the Horizon Europe (HORIZON) programme under grant agreement number 101075609.



Disclaimer

All the datasets included described in this document are collaborative products of 35 geological survey organizations across Europe, developed under the framework of the Pan-European Atlas of Sustainable Geo-Energy Capacities. These datasets are provided for informational purposes only and are intended to support exploration, research, planning, and decision-making related to sustainable Geo-Energy resources. While every effort has been made to ensure the accuracy and completeness of the data, it is provided 'as is' without any warranty, express or implied, including but not limited to warranties for a particular purpose. The contributing organizations and project partners assume no responsibility for errors, omissions, or inaccuracies in the dataset or for any consequences arising from its use. Users are advised to independently verify the data before relying on it for critical applications. The dataset may be subject to updates or modifications without prior notice. By accessing or using this dataset, users agree to hold harmless all contributing partners from any liability resulting from its use.

Copyright

This document may not be copied, reproduced, or modified in whole or in part for any purpose without written permission of the GSEU Consortium.

In addition, an acknowledgement of the document authors and all applicable portions of the copyright notice must be clearly referenced.

All rights reserved.

Acknowledgments

Special thanks to Hystories EU funded project partners and CO2GeoNet members for their contribution and support for the CO₂ storage potential Atlas.

Abbreviations	
AGS	Advanced Geothermal Systems
ATES	Aquifer Thermal Energy Storage
BHT	Bottom Hole Temperature
CAES	Compressed Air Energy Storage
CCS	Carbon Capture and Storage
CD	Conduction-Dominated Geothermal Plays
CO ₂	Carbon dioxide
CV	Convection-Dominated Geothermal Plays
DG-TWG	Deep Geothermal – Thematic Working Group
EC	Electrical Conductivity
EGDI	European Geological Data Infrastructure
EGS	Enhanced/Engineered Geothermal Systems
ESRI	Environmental Systems Research Institute
EU	European Union
GPT	Geothermal Play Type
HIP	Heat In Place
HSP	Heat Storage Potential
HT-ATES	High-Temperature Aquifer Thermal Energy Storage
ID	Identification code
MT-ATES	Medium-Temperature Aquifer Thermal Energy Storage
PDF	Probability Distribution Functions
TDS	Total Dissolved Solids

TVD	True Vertical Depth
SGC	Sustainable Geo-Energy Capacities

Table of Contents

1. Introduction	8
2. Boreholes and Wells (Level 00)	9
3. Carbon Storage Potential.....	12
3.1. Defining geological features of interest.....	13
3.2. Compiling the data from CO2Stop and Histories as the starting point for GSEU	14
3.3. CO ₂ storage capacity	15
3.4. Storage Readiness Level (SRL).....	18
3.5. Attributes represented in the layers.....	21
4. Deep Geothermal Energy Potential.....	34
4.1. Defining the deep geothermal approach.....	34
4.2. The datasets included on this version 1.2. (March 2026).....	35
4.3. Natural Thermal Water Springs (Level 00).....	35
4.4. Favourable Areas for Deep Geothermal Prospecting - Geothermal Play Types (Level 01)	38
4.5. Map of identified and broadly assessed potential natural reservoirs for Deep Geothermal Energy and MT/HT-ATES across EU (Level 02).....	44
4.5.1. Lumped and stochastic Heat In Place (HIP) assessment.....	57
4.5.2. Lumped and stochastic theoretical Heat Storage Potential (HSP) assessment.....	57
4.5.2.1. HSP calculations.....	58
5. References	60
6. Annex.....	62

List of Figures

<i>Figure 1: Example of the borehole's visualization in the Pan-European Atlas SGC.</i>	11
<i>Figure 2: Relational database (Courtesy of Hystories).</i>	12
<i>Figure 3: Example of the formations, storage units and traps visualization in the Pan-European Atlas SGC.</i>	13
<i>Figure 4: Illustration of storage formation, unit and trap in the database (Courtesy of Hystories).</i>	14
<i>Figure 5: Storage readiness level (SRL) framework, stages and thresholds in the storage site permitting process (brown) and storage technical appraisal and planning (green). *An exploration permit or well confirmation may not be needed for re-use of a hydrocarbon field from Akhurst et al. (2021).</i>	19
<i>Figure 6: Play-based Exploration Pyramid (Moeck, 2020) applied to the GSEU approach for DG</i>	34
<i>Figure 7: Example of the thermal spring's visualization in the Pan-European Atlas SGC</i>	37
<i>Figure 8: Geothermal play classification from Moeck, I. (2014).</i>	38
<i>Figure 9: Geothermal play classification from DARLINGe Interreg Project, Basic concepts of deep geothermal Energy (2017), based on Moeck, I. & Beardsmore, G., (2014).</i>	39
<i>Figure 10: Example of the Favourable Areas for Deep Geothermal Prospecting (Geothermal Play Types) visualization in the Pan-European Atlas SGC.</i>	40
Figure 11: <i>Example of the attribute table of a polygon in the EGDl visor.</i>	40
<i>Figure 12: Example of a Factsheet from a geothermal play in Hungary.</i>	43
<i>Figure 13: Potential Geothermal Reservoirs' visualization for the lithology attribute in the Atlas.</i>	45
<i>Figure 14: Potential Geothermal Reservoirs' visualization and distribution histogram for the porosity attribute in the Atlas.</i>	47
<i>Figure 15: Potential Geothermal Reservoirs' visualization and distribution histogram for the minimum temperature (°C) attribute in the Atlas.</i>	48
<i>Figure 16: Potential Geothermal Reservoirs' visualization and distribution histogram for the maximum temperature (°C) attribute in the Atlas.</i>	49
Figure 17: <i>Potential Geothermal Reservoirs' visualization and distribution histogram for the top reservoir depth (m b.g.l.) attribute in the Atlas.</i>	50
Figure 18: <i>Potential Geothermal Reservoirs' visualization and distribution histogram for the bottom reservoir depth (m b.g.l.) attribute in the Atlas.</i>	51
Figure 19: <i>Potential Geothermal Reservoirs' visualization and distribution histogram for the reservoir minimum thickness (m) attribute in the Atlas.</i>	52
Figure 20: <i>Potential Geothermal Reservoirs' visualization and distribution histogram for the reservoir maximum thickness (m) attribute in the Atlas.</i>	53
Figure 21: <i>Example of a Factsheet from a reservoir in Spain.</i>	56

List of tables

<i>Table 1: Example and definition of the attributes for boreholes and well layer.</i>	10
<i>Table 2: Descriptive title and activities that are likely to have been undertaken, from initial capacity assessment to project operation, by Storage Readiness Level (SRL). EIA, Environmental Impact Assessment.</i>	20
<i>Table 3: Attributes of the Formations level.</i>	21
<i>Table 4: Attributes of the Storage Units level.</i>	23

Table 5: Attributes of the traps level. 27

Table 6: Example and definition of the attributes for thermal springs layer..... 36

1. Introduction

In the framework of the Geological Service for Europe project (GSEU), the Geothermal energy & Underground storage inventory seeks to construct an online Pan-European Atlas of Sustainable Geo-Energy Capacities (Pan-European Atlas SGC) accessible through the European Geological Data Infrastructure (EGDI) platform (<https://www.europe-geology.eu/data-tools/map-viewer/>). It aims to provide harmonized Pan-European inventories, characterisations and knowledge of sustainable Geo-Energy carriers. The effort of the initial stage of this project has been focused on gathering and harmonizing transnational data to assess geological storage capacity and geothermal energy of subsurface in a frame of a decarbonized, sustainable and competitive European industry. The GSEU SGC Atlas aims to provide continuum and rigorous data across Europe regarding 1) Geological Storage (permanent CO₂ storage; temporal Hydrogen storage, and Compressed Air Energy Storage (CAES)), and 2) Geothermal energy including Low, Mid-Temperature/High Temperature Underground Thermal Energy Storage.

The Atlas aims to integrate data from historical projects and new appraisal and assessment activities to create impact on the following approaches:

- To improve alignment of cross-border Geo-Energy developments.
- To ensure access to future insights and updates on Geo-Energy resulting from national and European research.
- To accelerate the efficient and competitive uptake of clean and sustainable Geo-Energy and storage technologies.
- To improve planning, regulation and decision-making to enable responsible and effective uptake of Geo-Energy.

The current **version (V1.2)** of the Pan-European Atlas SGC provides information of the CO₂ storage potential, favourable areas for of deep geothermal prospection (geothermal plays) including mid and high temperature thermal underground energy storage. The information is structured in three main sections, listed as drop-down categories, which two of them contain multiple layers following this scheme:

Geo-Energy

GSEU – Pan-European Atlas of Sustainable Geo-Energy Capacities

Boreholes and Wells (Level 00)

Carbon Storage Potential

CO₂ Storage Traps

CO₂ Storage Geological Units

CO₂ Storage Geological Formations

Geothermal Energy

Thermal Springs (Level 00)

Favourable areas for Deep Geothermal Prospecting (Level 01)

Potential reservoirs for geothermal exploitation and MT/HT-ATES (Level 02)

This document describes each of the sections and the layers included in the Pan-European Atlas SGC according to the main impacts of the GSEU project. All the datasets have been generated as a

collaborative effort of 35 geological survey organizations across Europe, which may be subject to subsequent updates and/or modifications without prior notice.

2. Boreholes and Wells (Level 00)

The first section of the Pan-European Atlas SGC corresponds to a vector point layer containing the data of each Geo-Energy borehole, either onshore or offshore, gathered and harmonised by the 35 geological survey contributors.

This layer mainly supports the topics of CO₂ storage and Geothermal Energy, but also any other energy carrier even despite that is not described in the Atlas now. Some threshold constraints have been considered during the generation of this layer in relation to CO₂ storage and Deep Geothermal Energy purposes:

- All boreholes of at least 800 m of true vertical depth (TVD) may be considered. This criterion is usually used in the literature as the minimum depth for the transition zone at which CO₂ should be in a supercritical phase, making it favourable for CO₂ storage.
- All boreholes of at least 30 °C may be considered. It is the minimum temperature threshold for Deep Geothermal purposes.

Exceptions for those constrains have been also considered: boreholes that do not fit the thresholds of depth and temperature but located in areas where geological and/or technical parameters are favourable for geological storage (CO₂, H₂, CAES) and/or Deep Geothermal purposes, have been also considered according to the expert knowledge of the whole contributors.

Table 1 summarises all the items included in the attribute table for each borehole and can be interactively checked in the Atlas visor (<https://www.europe-geology.eu/data-tools/map-viewer/>). Not all the fields have been filled in due to the lack of data (some of the boreholes were drilled more than a century ago), or due to confidentiality requirements from the data owners (these concerns, as well, to some sensitive attributes such as the point coordinates). Bottom Hole Temperature (BHT), TVD, geochemical measurements or borehole purpose are some of the main attributes included in this product.

Potential geological reservoirs identified in each borehole (single or multiple reservoirs) are indicated in the attribute table, including the main lithology facies, depth of the top reservoir, and type of carrier (for Carbon Storage purposes) or reservoir temperature.

All the points in the Pan-European Atlas SGC are displayed according to the True Vertical Depth (TVD) values in meters, considered as the total amount of drilled section. Blue points correspond to lower values and red ones to higher values of this attribute (cf. *Figure 1*).

Table 1: Example and definition of the attributes for boreholes and well layer.

Attribute in layer	definition	Example
ID	Unique identification code composed by the NUTS Level 2 code + word "well" + unique and consecutive number for each well starting from 001.	ES51_well_001
X_EPSG3035	X coordinates in meters based on the geographic reference system: EPSG:3035 ETRS89 / LAEA Europe (https://epsg.io/3035).	43624946.00
Y_EPSG3035	Y coordinates in based on the geographic reference system: EPSG:3035 ETRS89 / LAEA Europe (https://epsg.io/3035).	463454810.00
Well_name	Free text according to the original well name.	Amposta-1
Company	Organization related to well drilling.	SIPSA
Drill_year	Year of well drilling.	1995
Purpose	Purpose of well drilling.	Geothermal prospective
TVD	True vertical depth of the well in meters.	3200.50
BHT	Bottomhole temperature. The maximum temperature recorded at total depth, in °C.	56.50
Gradient	Rate of increase in temperature per unit depth in the Earth. In °C/km	25.40
Mean_sur_T	Annual mean air temperature of the drilling point, in °C.	15.00
Topo_m (Elevation)	Topographic elevation of the drilling starting point in meters. Positive (onshore) / negative (off-shore).	250.50
Geoch_TDS	Total dissolved solids in ppm.	445.25
Geoch_EC	Electrical conductivity of the fluid in µS/cm.	2500.00
Status	The current state of the well.	Active well
Database	Reference database if the well data is stored there.	Non-existent database
Metadata of source data	Link to metadata repository.	Non-existent metadata
Storage_R1	First reservoir for geo-energy storage indicating lithology, depth of top in meters and type of use.	Limestone/1800/CO ₂ (include multiple vectors if needed, e.g. CO ₂ +H ₂)
Geo_Res1	First geothermal reservoir indicating lithology, depth top of reservoir in meters and temperature in °C.	Limestone/1800/65
Storage_R2	Second reservoir for geo-energy storage indicating lithology, depth of top in meters and type of vector.	Sandstone/2300/CO ₂ (include multiple vectors if needed, e.g. CO ₂ +H ₂)
Geo_Res2	Second geothermal reservoir indicating lithology, depth of top in meters and temperature in °C.	Sandstone/2300/75

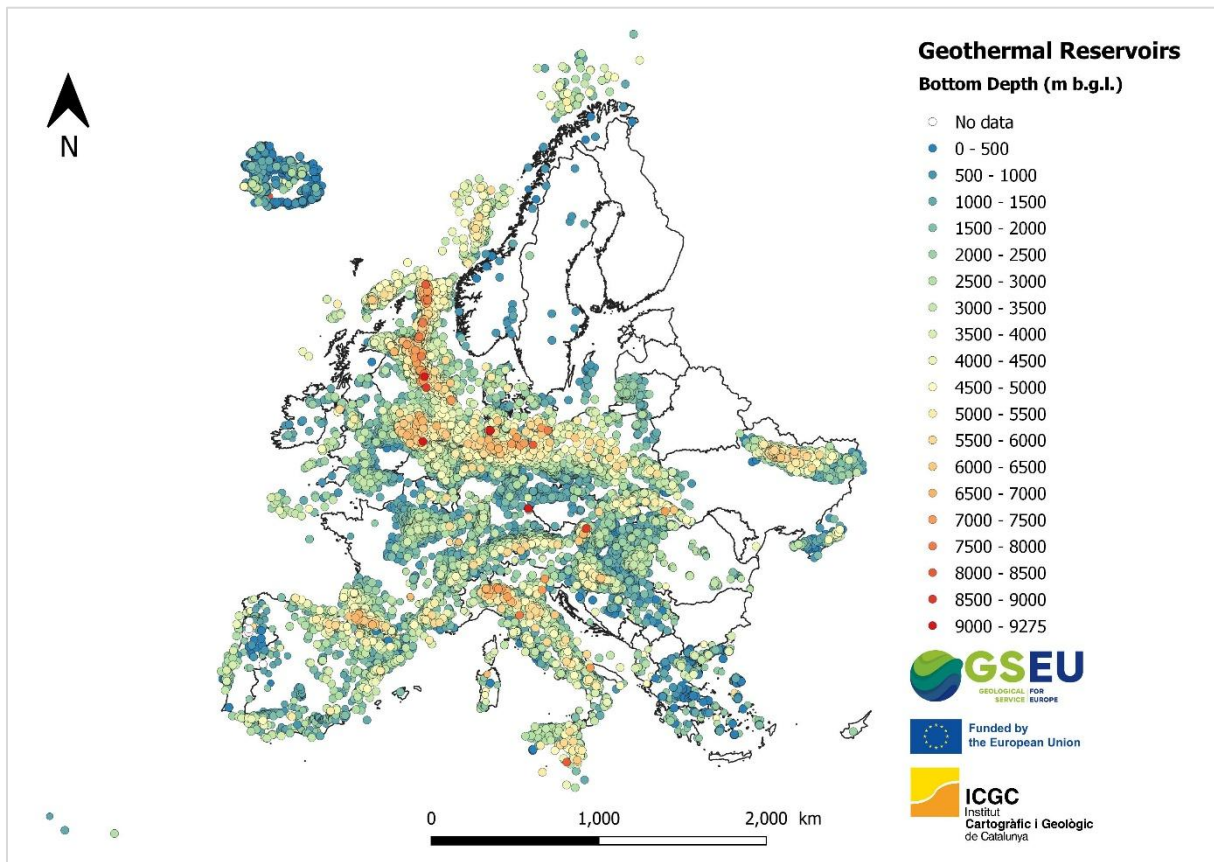


Figure 1: Example of the borehole's visualization in the Pan-European Atlas SGC.

How to cite this product:

GSEU Project (2026). Map of Geo-Energy Boreholes and Wells (Level 00). Version 2.0. Access information on May 15th, 2026 [<https://www.europe-geology.eu/data-tools/map-viewer/>].

Terms of Use / License:

This work is licensed under a Creative Commons Attribution 4.0 International License (CC BY 4.0). Detailed information at <http://creativecommons.org/licenses/by/4.0/>.

3. Carbon Storage Potential

The second section of the Pan-European Atlas SGC corresponds to a group of layers conforming the Carbon or CO₂ storage purposes. Three different polygon vector layers have been constructed for this section and are linked together through a database relationship enabling a one-to-many relational database structure:

- 1) **Formation:** refers to the storage formation.
- 2) **Storage unit:** is defined as a part of a storage formation which meets the depth condition of more than 800 meters for CO₂ storage, and there can be one or more per formation.
- 3) **Trap:** is defined as the structural or stratigraphic fluid trap which has the potential to contain the fluid, and there can be one or more in each storage unit.

The database contains the high-level identified formations within each country that may have the potential for geological storage of CO₂. Within those formations are multiple storage units representing the area within the formation where CO₂ could be stored. Data can be added for multiple traps within each storage unit data representing geological closures for storage. The database allows the addition of detailed information for each formation, storage unit and trap to build as complete a picture as possible of the potential for geological storage within each of the European countries. In some cases, the database could be limited to one or two levels (formations and/or storage units) depending on the level of knowledge in the area. This is the same data structure followed by CO₂Stop EU funded project 2012-2013 (former Pan-European Atlas of CO₂ storage potential).

The database was developed to suit display in a **Geographical Information System (GIS)** represented by **polygons**, the areas where storage potential may exist, and reflects the formations, units and traps within the database. It is worth noting that in some cases, the polygons are assumed where there is uncertainty over the extent of the geographical area with potential for storage, or where the data are confidential (CF).

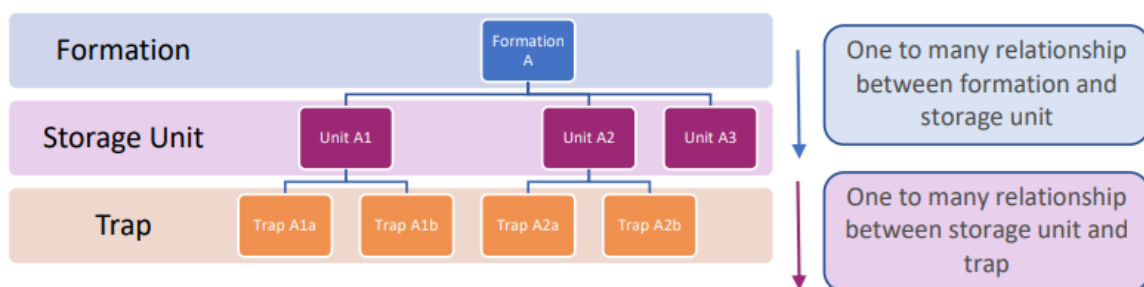


Figure 2: Relational database (Courtesy of Hystories).

In relation to data for depth to storage formation, it was decided to record two separate depths; median or average depth of the storage formation across its extent and the depth to the top of the formation. The median or average depth was recorded for CO₂Stop and is adopted as it enables modelling of storage site behaviour. The decision to include the depth to top of the storage formation, in addition to

the median depth, was based on its value in risk assessments and the depth to the crest of a hydrocarbon field is often published and in the public domain.

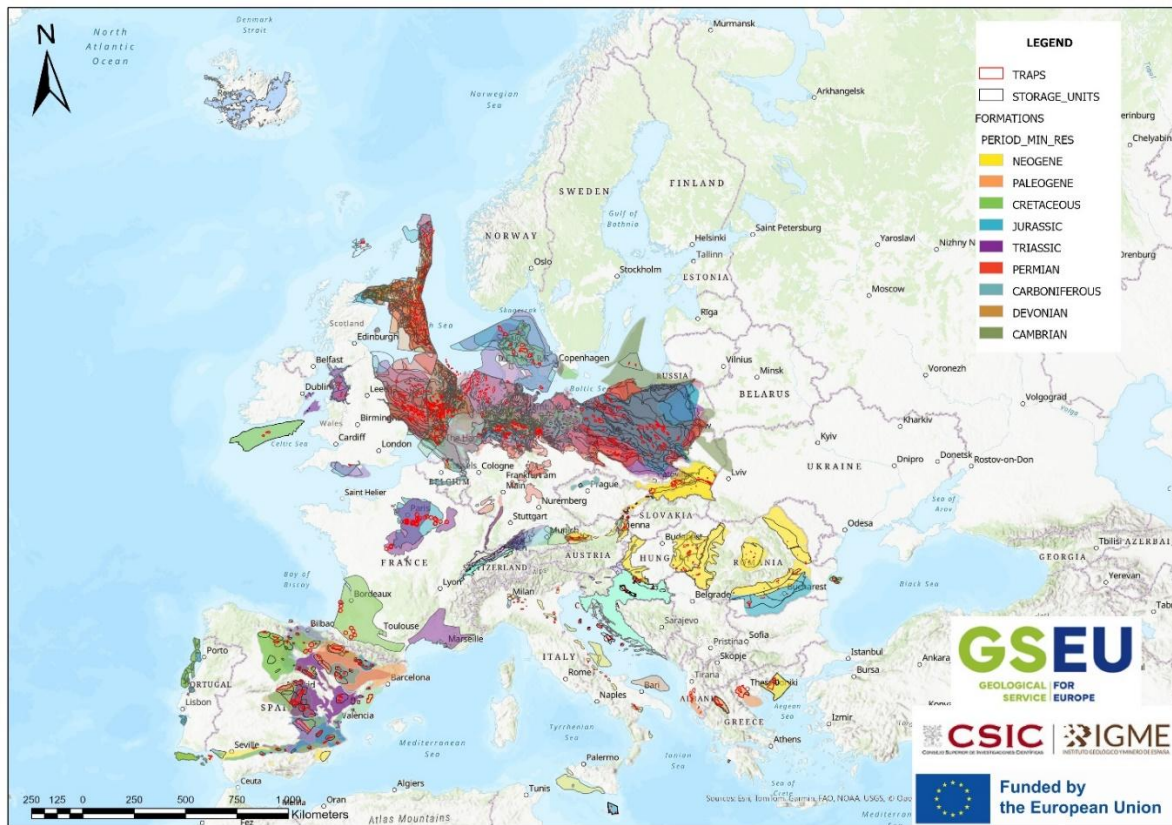


Figure 3: Example of the formations, storage units and traps visualization in the Pan-European Atlas SGC.

3.1. Defining geological features of interest

The database accommodates the heterogeneity and confidentiality of data by offering the possibility to define large areas where there are porous rocks (formations), areas where there are porous rocks at suitable depth (units) and identified closures with storage potential (traps).

Storage formation is defined as a mappable body of rock that is continuous in the subsurface and which is both porous and permeable. It is usually a defined geological formation within the recognised national chrono-stratigraphy.

Storage unit delineates the parts of the storage formation that lie at depths greater than 800 m and which are covered by an effective cap rock. Storage unit information can also be used to highlight areas where storage potential is expected but traps cannot be defined owing to data confidentiality, or lack of available data.

Storage traps are the most important geological features, as these represent the areas where the most data are available and highlight a tangible opportunity to carry out further investigation to verify the

storage potential. Storage traps are defined as structural or stratigraphic traps which have the potential to retain CO₂ within them, e.g. domes in saline water-bearing parts of the reservoir rock that are completely sealed by cap rocks, or proven oil and gas fields. If the traps are 'stacked' and separated by thicknesses of impermeable rock, then these traps should be identified separately since depth is an important parameter for estimating storage capacity.

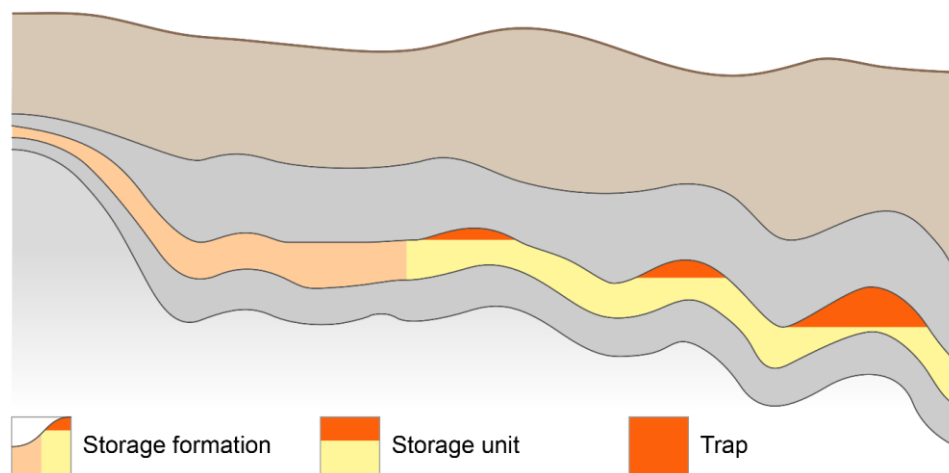


Figure 4: Illustration of storage formation, unit and trap in the database (Courtesy of Hystories).

3.2. Compiling the data from CO2Stop and Hystories as the starting point for GSEU

The GSEU project builds on the work of the CO2Stop and Hystories (<https://hystories.eu/>) EU funded projects. CO2Stop contained potential CO₂ storage formations, units and traps. Hystories contained potential hydrogen storage formations, units and traps. Since the Hystories database built on the CO2Stop database and maintained the same structure, similar attribute fields, and the formation, unit and trap ID numbers were preserved, it was possible to merge the databases to generate v0 of the GSEU Access database. The following steps were undertaken

- A copy of the Hystories data was taken as a text file from the Hystories WebGIS
- The Hystories data was imported, using FME, into the Hystories database structure
- Since some columns were removed during Hystories, these were added back directly from the CO2Stop database, based on the columns required in the word document.
- The CO2Stop tables were then imported using an Access query to populate the new 'CO2Stop' columns into the Hystories database where the id's matched. This generated the GSEU database.
- The Access data entry tables were then updated to reflect the merged database and new data entry features and/or dictionaries were added
- The database was then split by country to allow partners to work on a local copy of the GSEU database.

3.3. CO₂ storage capacity

The CO₂ storage capacity estimation approach depends on the level of knowledge and open to a expert opinion. Taking into account the level of (low) maturity in most cases, it was proposed storage capacity estimation based on theoretical (volumetric or static) CO₂ storage estimation but keeping the option to other approaches if they are accepted by international community and properly referenced. It was considered a priority to apply same approach (and capacity estimation calculation) at national level and at Pan-European Atlas; that is, those countries with national CO₂ storage potential calculation have provided the same values. The estimated capacity had been accompanied by an SRL which indicates the level of maturity for each estimation.

Both, capacity estimation and SRL are defined for traps. Only, if a storage unit is provided with no traps, a regional estimation of capacity and/or SRL is accepted.

A consistent and published methodology was proposed to calculate theoretical CO₂ storage capacity, following the same approach used in CO2Stop for both saline aquifers and hydrocarbon fields which are described below.

For this Version 1 of the Pan-European Atlas of SGC (April 2025), it is included capacity estimation for those existing national atlas. For final version (2026), capacity estimation will be included for all countries.

3.3.1. Deep saline aquifers

Several methods were proposed to obtain a storage capacity estimate method for saline formations. The method used had been chosen depending on the level of knowledge and available data on a given structure.

- **Connected pore volume and storage efficiency (Method 1)**

The approach for storage capacity estimation in deep saline aquifers follows both theoretical and effective storage capacity by applying a storage efficiency factor (capacity coefficient). The efficiency factor includes the cumulative effects of trap heterogeneity, CO₂ buoyancy and sweep efficiency, but no values or range of values are given as the factor is site-specific and needs to be determined through numerical simulations and/or field work. However, in absence of data, the 2022 reviewed CO₂ SCREEN tool¹, developed by NETL (National Energy Technology Laboratory) of US Department of Energy, provides a set of Efficient factors (S_{ef}) estimated by numerical simulations for different depositional environments.

Deep saline aquifer:
$$M_{CO_2} = A * h * NG * \Phi * \rho_{CO_2} * S_{ef}$$

where:

M_{CO₂}: regional “bulk” storage capacity

A: area of regional aquifer/ trap

h: average height of regional aquifer / trap

NG: average net to gross ratio of regional aquifer

¹ <https://edx.netl.doe.gov/dataset/co2-screen> (tool) and <https://edx.netl.doe.gov/carbonstorage> (report)

Φ : average reservoir porosity of regional aquifer (best estimate)

ρ_{CO_2} : CO₂ density at reservoir conditions

S_{ef} : storage efficiency factor (for bulk volume of regional aquifer)- in case of no other data, it was proposed 2%.

If the knowledge and level of detail exists at trap level, storage capacity estimates volume in traps, where the buoyant CO₂ can be safely retained. It was emphasized here that storage capacity in saline formations is not only limited by the pressure increase that could be sustained by the formation and the allowable pressure increase, but also by the traps where CO₂ collects after injection. In a high-level regional screening study, proving the existence of suitable traps and the location of injection sites may be deferred to a later and more detailed subsurface characterisation. The volume of CO₂ that is derived from the connected volume and assumed pressure increase must nevertheless be stored in a structure that will retain the CO₂. The smaller of these two volumes (CO₂ volume from pressure increase, trap volume) defines the total storage volume.

Comparison of the methodologies proposed by the CSLF Task Force and the USDOE Capacity and Fairways Subgroup indicates several analogies and differences (Bachu, 2008) based of the defined CO₂Stop methodology, it must be keeping in mind to be agreed:

- 1) Only volumetric (static) storage of CO₂ in free phase is considered (no CO₂ in solution);
- 2) USDOE Capacity and Fairways Subgroup does not limit the volumetric trapping in deep saline aquifers only to stratigraphic and structural traps; rather the entire aquifer is considered;
- 3) The effect of irreducible water saturation is included in the efficiency factor S_{ef} through the pore-scale displacement efficiency;
- 4) Recommended to use an average CO₂ density at in-situ conditions rather than minimum and maximum values.

- **Connected pore volume and pressure increase (Method 2)**

A more reliable estimate of the storage capacity of a saline formation can be obtained, when the level of knowledge allows an estimate of the allowable pressure increase to be made. Combined with the compressibility of the fluids and rock, the storage capacity estimate is derived from Frailey (2007):

$$M_{CO_2} = A * h * NG * \Phi * \rho_{CO_2} * \Delta P * (\beta_r + \beta_f)$$

where:

ΔP : the pressures increase (relative to the initial pressure)

β_r and β_f : compressibility of the matrix and compressibility of the fluid, respectively.

- **Capacity estimate from detailed site characterisation study (Method 3)**

A site characterisation study is one of the elements required for a storage licence application. In such a study all available data on the storage formation is collected to model the static and dynamic behaviour of the formation. This estimated storage capacity is based on all available data and on detailed modelling of the dynamic behaviour of the storage formation.

- **Capacity estimate from injection tests (Method 4)**

The most reliable storage capacity estimate is obtained from an injection test, or from a prolonged injection period. A test injection will demonstrate not only the feasible injection rates, but, when the injection is continued for a sufficiently long time, will also show the size of the connected volume. An injection test is one of the last activities, prior to starting an injection and storage project.

3.3.2. Hydrocarbon fields

For hydrocarbon fields, the method proposed here is the same as that used to obtain the storage capacity estimates that are in the EU GeoCapacity and CO2Stop database. Two methods are described:

- **CSLF method for hydrocarbon field storage capacity (Method 1)**

The calculation of CO₂ storage capacity in hydrocarbon fields uses the methodology described by Bachu et al. (2007):

$$\text{Gas field: } M_{CO_2} = \rho_{CO_2} * R_f * (1 - F_{ig}) * OGIP * B_g$$

$$\text{Oil field: } M_{CO_2} = \rho_{CO_2} * (R_f * OOIP * B_o - V_{iw} + V_{pw})$$

Where:

- M_{CO_2} : hydrocarbon field storage capacity
- ρ_{CO_2} : CO₂ density at reservoir conditions (best estimate)
- R_f : Recovery factor
- F_{ig} : fraction of injected gas
- OGIP: original gas in place (at surface conditions)
- B_g : gas formation volume factor $\ll 1$
- OOIP: original oil in place (at surface conditions)
- B_o : oil formation volume factor > 1
- V_{iw} : volume of injected water
- V_{pw} : volume of produced water

- **Alternative method for hydrocarbon field storage capacity (Method 2)**

An alternative formulation can be used, in cases where not all of the above parameters are available (Schuppers et al., 2003):

$$M_{CO_2} = \rho_{CO_2} * UR_p * B$$

where:

M_{CO_2} : hydrocarbon field storage capacity

ρ_{CO_2} : CO₂ density at reservoir conditions (best estimate)

UR_p: proven ultimate recoverable oil or gas

B: oil or gas formation volume factor in this last expression,

The methodology used for hydrocarbon fields yield theoretical storage capacity according to the methodology described by CSLF. To reach effective storage capacity CSLF introduce a number of capacity coefficients representing mobility, buoyancy, heterogeneity, water saturation and aquifer strength, respectively and all reducing the storage capacity. However, there are very few studies and methodologies for estimating the values of these capacity coefficients and hence we have chosen not to distinguish between theoretical and effective storage capacity for hydrocarbon fields.

3.4. Storage Readiness Level (SRL)

The European Commission Communication (2024) on industrial carbon management strategy requires that “each potential storage site will be labelled according to its ‘storage readiness level’ and matched with public data to speed up the work to identify and assess the storage capacities. SRL is an attribute to be included as new attribute on GSEU CO₂ Atlas.

CO₂ Storage Readiness Levels (Akhurst et al., 2021) are presented to communicate CO₂ storage site technical appraisal, Carbon Capture and Storage (CCS) project planning and permitting activities that have been completed, and what remains to be completed for a CO₂ storage site to become operational. The framework is based on the experience of site planning in the UK, The Netherlands and site operation in Norway to 2021 and applied to more than 700 sites. It extends and complements the industry commercial project development classification to encompass sites at lower levels of understanding, data availability and interpretation. Flexibility within the framework allows communication of the level of understanding of all prospective sites and enables comparison of sites in different permitting jurisdictions. Application of standardised levels informs the duration of permitting and resources invested to achieve contingent storage resource

SRLs are a **qualitative appraisal**, not a quantitative measure, since each site will have its own specific characteristics, including aspects such as, history of investigation, ownership, availability of CO₂, national policy and regulation.

There are no ‘hard boundaries’ between the levels and a degree of overlap of activities exists, this flexibility enables application and comparison of sites within a national portfolio and in different permitting jurisdictions. Advice from industry stakeholders has ensured consistency of the SRL framework, as a high-level communication tool, with the industry resource classification and commercial storage project viability (SPE, 2017). The SRL framework extends the commercial classification which does not assess the lower levels of appraisal although consistent terminology is used, where they are equivalent. The SRLs framework encompasses prospective sites from first-pass assessment at SRL 1, theoretical capacity at SRL 2, and introduces an initial storage project concept and risk reduction at SRL 3. There will have been completion of sufficient risk-assessment-led desktop study to apply for an exploration permit, if needed, for sites at SRL 4 and all technical containment, capacity and injectivity risks are reduced or mitigated at SRL 5. The SRLs framework is consistent and complementary with the commercial project development classification. A site at SRL 6, where a site is integrated into a feasible CCS project concept, is ‘discovered’, equivalent to and also termed the same ‘contingent storage resource’ as the commercial storage project classification. All CCS project planning will have been completed, sufficient to apply for or award of a storage permit, for sites at SRL 7. At SRL 8 a storage

permit has been issued and the investment decision to construct and operate the site for a CCS project has been made. At SRL 9 the site is operational as a component of an integrated CCS project.

SRL number	Description/title of SRL	Stages and thresholds in the storage site permitting process	Stages and thresholds in technical appraisal & project planning
SRL 1	First-pass assessment of storage capacity at country-wide or basin scales	Gathering information for an exploration permit, if needed*	Technical appraisal
SRL 2	Site identified as theoretical capacity		
SRL 3	Screening study to identify an individual storage site & an initial storage project concept		
SRL 4	Storage site validated by desktop studies & storage project concept updated		
SRL 5	Storage site validated by detailed analyses, then in a relevant 'real world' setting	Exploration permit	Well confirmation, if needed* Outline planning for development
SRL 6	Storage site integrated into a feasible CCS project concept or in a portfolio of sites (contingent storage resource)	Planning & plan iterations for a storage permit*	Technical risk reduction completed
SRL 7	Storage site is permit ready or permitted	Storage permit* application & iteration	Project planning & permitting iterations
SRL 8	Commissioning of the storage site and test injection in an operational environment	Storage permit* required Injection permit application, if needed	All planning work completed Construction & testing
SRL 9	Storage site on injection	Injection permit	Site construction completed Operation & monitoring

◆ Equivalent of storage permit relevant to national jurisdiction

Figure 5: Storage readiness level (SRL) framework, stages and thresholds in the storage site permitting process (brown) and storage technical appraisal and planning (green). *An exploration permit or well confirmation may not be needed for re-use of a hydrocarbon field from Akhurst et al. (2021).

Although there is flexibility in the qualitative SRLs framework, the site regulatory stages and the supporting technical appraisal and project planning activities, defines thresholds illustrated in Fig. 3. During appraisal of a storage site, the results of detailed investigations may reveal characteristics that make it unsuitable for the planned storage project. The site will remain at the SRL achieved at that point but flagged as 'development on hold'. The site data and findings of the characterisation investigations will remain available until needed by a storage project with a matching required capacity. Communication of a storage site's technical appraisal, project planning and permitting is conveyed to stakeholders regardless of scale, whether considered at national, depositional basin, regional or local extent. However, the standardised approach and flexibility accommodated by the SRLs framework allows comparison of like-with-like regardless of scale for decision making, e.g.: site selection by an operator in the proximity of a CO₂ capture project; strategic development of a national storage resource; governmental planning of CO₂ emissions reduction.

The activities that are likely to have been undertaken, from initial capacity assessment to project operation, for each SRL is summarised in *Table 2*.

Table 2: Descriptive title and activities that are likely to have been undertaken, from initial capacity assessment to project operation, by Storage Readiness Level (SRL). EIA, Environmental Impact Assessment.

SRL	Descriptive title	Activities at each SRL
SRL 1	First pass assessment of storage capacity at country-wide or basin scales	At SRL 1 an appraisal to identify the CO ₂ storage potential has been completed, as a first pass assessment, although this potential may not have been fully quantified. Characteristics suitable for CO ₂ storage have been identified within a country or region.
SRL 2	Site identified as theoretical capacity	At SRL 2 there has been systematic mapping of the storage potential of a whole region, country or jurisdiction's potential storage resource. A consistent and referenced methodology will have been followed and applied.
SRL 3	Screening study to identify an individual storage site and initial storage project concept	At SRL 3 a screening study will have been completed, achieved after a ranking exercise based on the storage site's expected performance against a set or subset of geological, technical, economic and geographical criteria. An initial project concept will have been outlined and a CO ₂ storage site may have been identified, either individually or as a group of sites, as having high potential for storage. Any major risks to containment and capacity will have been identified.
SRL 4	Storage site validated by desktop studies and storage project concept updated	At SRL 4 a detailed desktop characterisation of the storage site will have been completed to validate the selection as potentially suitable for storage. For a site to qualify for SRL 4 it will have an initial static geological model or conceptual geological model. Available site-specific data will have been interpreted. There is sufficient information for preparation of an exploration licence application and submission to the relevant authority, if needed.
SRL 5a 5b 5c	Storage site validated, firstly by detailed analysis, then in a relevant 'real world' setting	At SRL 5a detailed risk assessment-led investigations and risk reduction activities required to inform a storage permit application specific to a given site based on existing information will have been completed. At SRL 5b new data is acquired, where needed, to assure the storage site, this may include direct evidence of the storage strata in a 'real world' setting and to inform an EIA. At SRL 5c all storage site data will have been acquired, analysed and technical appraisal completed to reduce or mitigate storage risks sufficient for a storage permit application.
SRL 6	Storage site integrated into a feasible CCS	At SRL 6 a storage site will have been integrated into a feasible CCS project or a portfolio of sites. The assured storage capacity will have been defined. An EIA will have been completed. All concerns

	project concept or portfolio of sites (contingent storage resource)	regarding subsurface containment, migration and capacity to store CO ₂ for a project will have been addressed.
SRL 7	Storage site is permit ready or permitted	At SRL 7 all of the CCS project planning work, based on the technical appraisal and as required for a storage permit application, will have been completed. An application for a CO ₂ storage permit has been either submitted to the Competent Authority and permitted or is ready to be submitted.
SRL 8	Commissioning of the storage site and test injection at the site	At SRL 8 the storage permit has been issued and the investment decision to operate the site for a CCS project has been made. All legal and practical activities needed to implement site commissioning have been completed and the storage site has been tested in an operational environment.
SRL 9	Storage site on injection	At SRL 9 the site is operational as a component of an integrated CCS project.

3.5. Attributes represented in the layers

3.5.1. Attributes of formation level

At “Formation level” the attributes are listed in *Table 3*. The database from CO₂Stop was reviewed and some attributes have been renamed (yellow) or added (green). Attributes shown in black are assigned by database.

Table 3: Attributes of the Formations level.

GSEU Name of Attribute	Type	Description	CO ₂ Stop	Hystories
OBJECTID	Long Integer	Required for ArcGIS	OBJECTID	OBJECTID
FORMATION_ID	Text	Unique ID of the formation (automatically generated by Access)	FORMATION_ID	FORMATION_ID
FORMATION_NAME	Text	Name of the Formation	FORMATION_NAME	FORMATION_NAME
NO_STORE_UNITS	Number	Number of storage units	NO_STORE_UNITS	NO_STORE_UNITS
NO_DAUGHTER_UNITS	Number	Number of trap units	NO_DAUGHTER_UNITS	NO_DAUGHTER_UNITS
ASSESS_UNIT_TYPE	Text	Assessment Unit type - options are saline Aquifer with or without hydrocarbon fields	ASSESS_UNIT_TYPE	ASSESS_UNIT_TYPE
PERIOD_MIN_RES	Text	Youngest Period of storage formation	PERIOD_MIN	PERIOD_MIN_RES
PERIOD_MAX_RES	Text	Oldest Period of formation	PERIOD_MAX	PERIOD_MAX_RES
AGE_MIN_RES	Text	Youngest chronostratigraphy of storage formation	AGE_MIN	AGE_MIN_RES

AGE_MAX_RES	Text	Oldest chronostratigraphy of storage formation	AGE_MAX	AGE_MAX_RES
STRAT_GROUP_RES	Text	Stratigraphic Unit Group of storage formation	STRAT_GROUP	STRAT_GROUP_RES
STRAT_FORMATION_RES	Text	Stratigraphic Unit formation of storage formation	STRAT_FORMATION	STRAT_FORMATION_RES
LITHOLOGY_RES	Text	predominant lithology of storage formation	LITHOLOGY	LITHOLOGY_RES
GEOGRAPHIC_AREA	Text	Area of geological formation	GEOGRAPHIC_AREA	GEOGRAPHIC_AREA
GEOLOGICAL_BASIN	Text	Geological basin	GEOLOGICAL_BASIN	GEOLOGICAL_BASIN
ON_OFFSHOR	Text	Is the formation onshore or offshore (if both, label as wherever the majority of the formation lies – onshore or offshore)	ON_OFFSHOR	ON_OFFSHOR
REP_THICK_RES	Long Integer	Representative thickness of storage formation (m)	REP_THICK	REP_THICK_RES
REP_POR	Long Integer	Representative Porosity of storage formation decimal %	REP_POR	REP_POR
SEAL	Text	Name of most widespread primary seal for the storage formation	SEAL	SEAL
REP_THICK_SEAL	Number	Representative thickness of seal (m)		REP_THICK_SEAL
REMARKS	REMARKS	Any other relevant information	REMARKS	REMARKS
COUNTRY	Text	Country where the formation located	COUNTRY	COUNTRY
COUNTRYCODE	Text	International code of country	COUNTRYCODE	COUNTRYCODE
X_DD	Double	X co-ord in decimal degrees (WGS84)	X_DD	X_DD
Y_DD	Double	y co-ord in decimal degrees (WGS84)	Y_DD	Y_DD
X	Double	X coordinates in any given projection	X	X
Y	Double	y coordinates in any given projection	Y	Y
Projection_Info	Text	Details of projection used for X and Y coords	Projection_Info	Projection_Info
X_GIS	Double	X coordinates from the Hystories web GIS and new entries in EPSG: 4326		X_GIS
Y_GIS	Double	y coordinates from the Hystories web GIS and new entries, in EPSG: 4326		Y_GIS
Projection_Info_HYST	Text	Details of projection used for X_GIS and Y_GIS coords (must be in: WGS84 LL EPSG 4326)		Projection_Info_HYST
Date_Entered	Date/Time	Date the data was entered		Date_Entered
HYST_OR_CO2	Text	Project when this was updated ie Hystories, CO2Stop or GSEU		HYST_OR_CO2

3.5.2. Attributes of storage unit level

Once a formation is defined, storage units are those areas within it at a **depth greater than 800 metres from surface**. for each storage unit, the attributes collected are listed in *Table 4*.

Table 4: Attributes of the Storage Units level.

Name of Attribute GSEU	Type	Description	CO2Stop	Hystories
OBJECTID	Long Integer	A unique identifier for each feature record within the dataset generated by ArcGIS	OBJECTID	OBJECTID
FORMATION_ID	Text	Foreign key - Unique ID of the formation	FORMATION_ID	FORMATION_ID
STORAGE_UNIT_ID	Text	Unique storage unit id (auto populated)	STORAGE_UNIT_ID	STORAGE_UNIT_ID
STORAGE_UNIT_NAME	Text	Name of the storage unit	STORAGE_UNIT_NAME	STORAGE_UNIT_NAME
ASSESS_UNIT_TYPE	Text	Assessment of Unit type – Drop down list (Saline Aquifer with or without hydrocarbon fields)	ASSESS_UNIT_TYPE	ASSESS_UNIT_TYPE
PERIOD_MIN_RES	Text	Youngest period of storage unit	PERIOD_MIN	PERIOD_MIN_RES
PERIOD_MAX_RES	Text	Oldest period of formation	PERIOD_MAX	PERIOD_MAX_RES
AGE_MIN_RES	Text	Youngest chronostratigraphy age of storage unit	AGE_MIN	AGE_MIN_RES
AGE_MAX_RES	Text	Oldest chronostratigraphy of storage unit	AGE_MAX	AGE_MAX_RES
LITHOLOGY_RES	Text	Predominant lithology of storage unit	LITHOLOGY	LITHOLOGY_RES
WATER_DEPTH	Long Integer	Mean average water depth (m)	WATER_DEPTH	WATER_DEPTH
ON_OFFSHOR	Text	Is the unit onshore or offshore (if both, label as wherever the majority of the unit lies – onshore or offshore)		ON_OFFSHOR
SUBSURF_INTERF	Text	Interference with other uses of subsurface	SUBSURF_INTERF	SUBSURF_INTERF
SURF_ISSUES	Text	Any surface issues	SURF_ISSUES	SURF_ISSUES
EST_STORECAP_MIN	Double	Minimum estimated CO ₂ storage capacity (Mt)	EST_STORECAP_MIN	
EST_STORECAP_MEAN	Double	Mean estimated CO ₂ storage capacity (Mt)	EST_STORECAP_MEAN	
EST_STORECAP_MAX	Double	Maximum estimated CO ₂ storage capacity (Mt)	EST_STORECAP_MAX	
CAP_EST_METHOD	Text	Method used to estimate the storage capacity Drop down (Volumetric with storage efficiency, from detailed site characterisation study, replacement of hydrocarbons, Monte Carlo simulations)	CAP_EST_METHOD	
PEER_REVIEW_REF	Text	Provide peer reviewed public reference for the capacity method		
GROSS_THICK_MIN_RES	Double	Minimum Height / thickness of the storage unit (m)	GROSS_THICK_MIN	GROSS_THICK_MIN_RES
GROSS_THICK_MEAN_RES	Double	Mean Height / thickness of the storage unit (m)	GROSS_THICK_MEAN	GROSS_THICK_MEAN_RES

GROSS_THICK_MAX_RES	Double	Maximum Height / thickness of the storage unit (m)	GROSS_THICK_MAX	GROSS_THICK_MAX_RES
DEPTH_MIN_RES	Double	Minimum Depth of storage unit (m)	DEPTH_MIN	DEPTH_MIN_RES
DEPTH_MEAN_RES	Double	Mean Depth of storage unit (m)	DEPTH_MEAN	DEPTH_MEAN_RES
DEPTH_MAX_RES	Double	Maximum Depth of storage unit (m)	DEPTH_MAX	DEPTH_MAX_RES
DEPTH_TOP_MIN	Double	Depth to highest point of storage unit (that buoyant fluid could theoretically reach)		DEPTH_TOP_MIN
PRESSURE_MIN	Double	Minimum current pressure of storage unit (bar)	PRESSURE_MIN	PRESSURE_MIN
PRESSURE_MEAN	Double	Mean current pressure of storage unit (bar)	PRESSURE_MEAN	PRESSURE_MEAN
PRESSURE_MAX	Double	Maximum current pressure of storage unit (bar)	PRESSURE_MAX	PRESSURE_MAX
MAX_PRESSURE_MIN	Double	Minimum maximum allowable pressure of formation after CO ₂ injection (bar)	MAX_PRESSURE_MIN	
MAX_PRESSURE_MEAN	Double	Mean maximum allowable pressure of storage unit after CO ₂ injection (bar)	MAX_PRESSURE_MEAN	
MAX_PRESSURE_MAX	Double	Maximum allowable pressure of storage unit after CO ₂ injection (bar)	MAX_PRESSURE_MAX	
TEMP_C_MIN	Double	Minimum temperature (c)	TEMP_C_MIN	TEMP_C_MIN
TEMP_C_MEAN	Double	Mean temperature (c)	TEMP_C_MEAN	TEMP_C_MEAN
TEMP_C_MAX	Double	Maximum temperature (c)	TEMP_C_MAX	TEMP_C_MAX
PERM_MIN	Double	Minimum effective permeability mD	PERM_MIN	PERM_MIN
PERM_MEAN	Double	Mean effective permeability mD	PERM_MEAN	PERM_MEAN
PERM_MAX	Double	Maximum effective permeability mD	PERM_MAX	PERM_MAX
POROSITY_MIN	Double	Minimum porosity decimal %	POROSITY_MIN	POROSITY_MIN
POROSITY_MEAN	Double	Mean porosity decimal %	POROSITY_MEAN	POROSITY_MEAN
POROSITY_MAX	Double	Maximum porosity decimal %	POROSITY_MAX	POROSITY_MAX
FIELD_EXTENT_MIN	Double	Minimum areal extent of the storage unit (km ²)	FIELD_EXTENT_MIN	
FIELD_EXTENT_MEAN	Double	Mean areal extent of the storage unit (km ²)	FIELD_EXTENT_MEAN	FIELD_EXTENT_MEAN
FIELD_EXTENT_MAX	Double	Maximum areal extent of the storage unit (km ²)	FIELD_EXTENT_MAX	
VERT_NET_GROSS_MIN	Double	Minimum vertical net-gross (%)	VERT_NET_GROSS_MIN	VERT_NET_GROSS_MIN
VERT_NET_GROSS_MEAN	Double	Mean vertical net-gross (%)	VERT_NET_GROSS_MEAN	VERT_NET_GROSS_MEAN
VERT_NET_GROSS_MAX	Double	Maximum vertical net-gross (%)	VERT_NET_GROSS_MAX	VERT_NET_GROSS_MAX
COMPROCK_MIN	Double	Rock compressibility (1/Pa) - default = 5.00E -5	COMPROCK_MIN	
COMPROCK_MEAN	Double	Rock compressibility (1/Pa) - default = 5.00E -5	COMPROCK_MEAN	
COMPROCK_MAX	Double	Rock compressibility (1/Pa) - default = 5.00E -5	COMPROCK_MAX	
COMPFLUID_MIN	Double	Fluid compressibility (1/Pa) default = 1.00E -4	COMPFLUID_MIN	

COMPFLUID_MEAN	Double	Fluid compressibility (1/Pa) default = 1.00E -4	COMPFLUID_MEAN	
COMPFLUID_MAX	Double	Fluid compressibility (1/Pa) default = 1.00E -4	COMPFLUID_MAX	
SALINITY_BRINE	Double	Total dissolved solids (g/l)	SALINITY_BRINE	SALINITY_BRINE
STATUS	Text	Status: i.e. producing, not producing etc	STATUS	STATUS
<i>Not required for GSEU but field remains in the database</i>		<i>Sulphates in Rock or Fluid of Reservoir</i>		<i>SULPHATES_RES</i>
<i>Not required for GSEU but field remains in the database</i>		<i>Iron in rock or Fluid of Reservoir</i>		<i>IRON_RES</i>
CO2_RES	Text	CO ₂ in fluid of reservoir		CO2_RES
CO2_DENSIT	Double	Calculated using separate spreadsheet	CO2_DENSIT	
NO_AQUIF_DAUGHT		Number of Aquifer traps in the database		NO_AQUIF_DAUGHT
NO_HC_DAUGHT		Number of HC traps in the database		NO_HC_DAUGHT
SRL	Double	Storage Readiness Level (see Akhurst et al 2021 paper)		
SEAL	Text	Name of most widespread primary seal for the storage unit	SEAL	SEAL
PRIM_SEAL_OVERLIE	Text	Does primary seal directly overlie assessment unit (yes/no)		PRIM_SEAL_OVERLIE
MIN_SEAL_THICK	Double	Minimum primary seal thickness (m)		MIN_SEAL_THICK
<i>Not required for GSEU but field remains in the database</i>		<i>Sulphates in Rock or Fluid of seal</i>		<i>SULPHATES_SEAL</i>
<i>Not required for GSEU but field remains in the database</i>		<i>Iron in rock or Fluid of seal</i>		<i>IRON_SEAL</i>
PERIOD_MIN_SEAL	Text	Youngest period of storage unit		PERIOD_MIN_SEAL
PERIOD_MAX_SEAL	Text	Oldest period of storage unit		PERIOD_MAX_SEAL
AGE_MIN_SEAL	Text	Youngest chronostratigraphy of storage unit		AGE_MIN_SEAL
AGE_MAX_SEAL	Text	Oldest chronostratigraphy of storage unit		AGE_MAX_SEAL
LITHOLOGY_SEAL	Text	predominant lithology of seal		LITHOLOGY_SEAL
FAULT_DEN	Double	Number of faults that cut top storage unit	FAULT_DEN	FAULT_DEN
FAULT_THR_OVERBURDEN	Double	Number of faults that cut the top storage unit and top seal	VERT_EXTENT_FAULT	FAULT_THR_OVERBURDEN
AVE_FAULT_THR	Double	Average fault throw (m)	AVE_FAULT_THR	AVE_FAULT_THR
MAX_FAULT_THR_RES	Double	Max fault throw at top storage unit (m)	MAX_FAULT_THR_RES	MAX_FAULT_THR_RES
RISK_LAT_MIGR	Text	Risk of lateral migration out of unit of assessment (low/medium/high)	RISK_LAT_MIGR	RISK_LAT_MIGR
AVE_DIP_UNIT	Double	Average dip of unit of assessment (degrees)	AVE_DIP_UNIT	AVE_DIP_UNIT
SUSCEPT_RES_DAM	Text	Susceptibility of storage unit to damage when injecting fluids (low/medium/high)	SUSCEPT_RES_DAM	SUSCEPT_RES_DAM
<i>Not required for GSEU but field remains in the database</i>		<i>mineralogy of the storage unit</i>	<i>RES_MIN</i>	<i>RES_MINERAL</i>

<i>Not required for GSEU but field remains in the database</i>		<i>Faults in the seal</i>		<i>FAULT_IN_SEAL</i>
VERT_STRAT_COMPART	Text	Vertical storage unit compartmentalisation is flow barriers (e.g. faults expected to be sealing)	VERT_STRAT_COMPART	VERT_STRAT_COMPART
HOR_STRAT_COMPART	Text	Horizontal storage unit compartmentalisation (eg mudstone stringers)	HOR_STRAT_COMPART	HOR_STRAT_COMPART
<i>Not required for GSEU but field remains in the database</i>		<i>Fault Compartmentalisation of the Storage Unit</i>		<i>FAULT_COMPART</i>
ADVERSE_DIAG	Text	Risk of adverse diagenesis (capture any diagenetic features that might adversely affect rock quality, e.g. fibrous illite)	ADVERSE_DIAG	
SEAL_OTHER	Text	Secondary or other seal names	SEAL_OTHER	SEAL_OTHER
NO_WELLS_PENETR	Double	Number of existing wells penetrating the storage unit	NO_WELLS_PENETR	NO_WELLS_PENETR
WELL_VINT	Text	Well vintage	WELL_VINT	WELL_VINT
NO_ADAND_WELL_PENETR	Double	Number of abandoned wells penetrating storage unit	NO_ADAND_WELL_PENETR	NO_ADAND_WELL_PENETR
AGE_OLD_WELL	Double	Age of oldest abandoned well	AGE_OLD_WELL	AGE_OLD_WELL
VINT_PLAT	Text	Vintage production platform or site	VINT_PLAT	VINT_PLAT
SEISMIC	Text	Seismic available e.g. Full 3D seismic coverage, few 2D lines	SEISMIC	SEISMIC
WELLS	Text	Wells available (e.g. Wells through unit with logs)	WELLS	WELLS
MODELS	Text	Models available (e.g. regional model, site model)	MODELS	MODELS
STATUS_RESEARCH	Text	Status of the research on the unit	STATUS_RESEARCH	STATUS_RESEARCH
REMARKS	Text	Text field to add comments	REMARKS	REMARKS
COUNTRY	Text		COUNTRY	COUNTRY
COUNTRYCODE	Text		COUNTRYCODE	COUNTRYCODE
LAMBERT_E	Double	Eastings in Lambert projection	LAMBERT_E	LAMBERT_E
LAMBERT_N	Double	Northings in Lambert projection	LAMBERT_N	LAMBERT_N
X_DD	Double	X co-ord sin decimal degrees (WGS84)	X_DD	X_DD
Y_DD	Double	y co-ord in decimal degrees (WGS84)	Y_DD	Y_DD
X	Double	X coordinates in any given projection	X	X
Y	Double	y coordinates in any given projection	Y	Y
Projection_Info	Text	Details of projection used for X and Y coords	Projection_Info	Projection_Info
X_GIS	Double	X coordinates from the Hystories web GIS and new entries in EPSG: 4326		X_GIS
Y_GIS	Double	y coordinates from the Hystories web GIS and new entries, in EPSG: 4326		Y_GIS

Projection_Info_HYST	Text	Details of projection used for X_GIS and Y_GIS coords (must be in: WGS84 LL EPSG 4326)		Projection_Info_HYST
Date_Entered	Date/Time	Date the data was entered (automatically populated by the database)		Date_Entered
HYST_OR_CO2	Text	Project when this was updated ie Hystories, CO2Stop or GSEU		HYST_OR_CO2

3.5.3. Attributes of trap level

The final level of knowledge refers to a structural or stratigraphic trap with the potential to contain or trap fluids. For each storage unit identified, where traps are identified, the following attributes were compiled, as listed in *Table 5*.

Table 5: Attributes of the traps level.

Name of Attribute GSEU	Type	Description	CO2Stop	Hystories
OBJECTID	Long Integer		OBJECTID	OBJECTID
STORAGE_UNIT_ID	Text	Foreign key - Unique ID of the storage unit	STORAGE_UNIT_ID	STORAGE_UNIT_ID
TRAP_ID	Text	Unique id of the trap	TRAP_ID	TRAP_ID
TRAP_NAME	Text	Name of the trap	TRAP_NAME	TRAP_NAME
OPERATOR	Text	Field/site operator name		OPERATOR
OWNERSHIP	Text	E.g. Private company/state owned etc		OWNERSHIP
LICENCE	Text	Licence owner, type, date		LICENCE
ASSESS_UNIT_TYPE	Text	Storage unit type - drop down list saline aquifer with or without hydrocarbon fields	ASSESS_UNIT_TYPE	ASSESS_UNIT_TYPE
AVAILABLE	Text	Could this site be developed for CO ₂ storage? Yes/no/possibly		AVAILABLE
CURRENT_DEV	Text	Eg operating oil field, abandoned, gas storage, none		CURRENT_DEV
PLANNED_DEV	Text	Eg gas storage, H ₂ storage, gas production, none		PLANNED_DEV
EXPLORATION	Text	Has site exploration started? Yes/no/possibly		EXPLORATION
STORAGE_DEVELOPED	Text	Has storage (gas, CO ₂ , H ₂) storage site been developed - ie is it up and running? Yes/no/possibly		STORAGE_DEVELOPED
END_YEAR	Double	Planned year of site closure (including for oil extraction/gas storage etc)		END_YEAR
PERIOD_MIN_RES	Text	Youngest period of trap	PERIOD_MIN	PERIOD_MIN_RES

PERIOD_MAX_RES	Text	Oldest period of trap rock	PERIOD_MAX	PERIOD_MAX_RES
AGE_MIN_RES	Text	Youngest chronostratigraphy of trap rock	AGE_MIN	AGE_MIN_RES
AGE_MAX_RES	Text	Oldest chronostratigraphy of trap rock	AGE_MAX	AGE_MAX_RES
LITHOLOGY_RES	Text	predominant lithology of trap rock	LITHOLOGY	LITHOLOGY_RES
BOUNDARIES	Text	Drop down list – open, closed, partially open. Aim is to understand pressure constraints, if boundaries are closed, then pressure buildup will be quicker		
WATER_DEPTH	Long Integer	Mean average water depth (m)	WATER_DEPTH	WATER_DEPTH
ON_OFFSHOR	Text	Is the unit onshore or offshore (if both, label as wherever the majority of the unit lies – onshore or offshore)		ON_OFFSHOR
ENV_DEP_RES	Text	Primary environment of deposition of trap rock Eg. Desert		ENV_DEP_RES
RES_MINERAL	Text	mineralogy of the trap rock	RES_MIN	RES_MINERAL
SUBSURF_INTERF	Text	Interference with other uses of subsurface eg gas storage planned, drinking water aquifers above	SUBSURF_INTERF	SUBSURF_INTERF
SURF_ISSUES	Text	Any surface issues	SURF_ISSUES	SURF_ISSUES
EST_STORECAP_MIN	Double	Minimum estimated CO ₂ storage capacity (Mt) – aquifer daughter unit only	EST_STORECAP_MIN	
EST_STORECAP_MEAN	Double	Mean estimated CO ₂ storage capacity (Mt) – aquifer daughter unit only	EST_STORECAP_MEAN	
EST_STORECAP_MAX	Double	Maximum estimated CO ₂ storage capacity (Mt) – aquifer daughter unit only	EST_STORECAP_MAX	
CAP_EST_METHOD	Text	Method used to estimate the storage capacity	CAP_EST_METHOD	
PEER_REVIEW_REF	Text	Provide peer reviewed public reference for the capacity method		
GROSS_THICK_MIN_RES	Double	Minimum Height / thickness of the trap (m)	GROSS_THICK_MIN	GROSS_THICK_MIN_RES
GROSS_THICK_MEAN_RES	Double	Mean Height / thickness of the trap (m)	GROSS_THICK_MEAN	GROSS_THICK_MEAN_RES

GROSS_THICK_MAX_RES	Double	Maximum Height / thickness of the trap (m)	GROSS_THICK_MAX	GROSS_THICK_MAX_RES
DEPTH_MIN_RES	Double	Minimum Depth of the trap (m)	DEPTH_MIN	DEPTH_MIN_RES
DEPTH_MEAN_RES	Double	Mean Depth of the trap (m)	DEPTH_MEAN	DEPTH_MEAN_RES
DEPTH_MAX_RES	Double	Maximum Depth of the trap (m)	DEPTH_MAX	DEPTH_MAX_RES
DEPTH_TOP_MIN	Double	Depth to crest of trap in trap (m) (used to support risk assessment)		DEPTH_TOP_MIN
PRESSURE_MIN	Double	Minimum Current Pressure of trap (bar) (at the minimum average depth of reservoir)	PRESSURE_MIN	PRESSURE_MIN
PRESSURE_MEAN	Double	Mean Current Pressure of trap (bar) (at the mean average depth of reservoir)	PRESSURE_MEAN	PRESSURE_MEAN
PRESSURE_MAX	Double	Maximum Current Pressure of trap (bar) (at the maximum average depth of trap)	PRESSURE_MAX	PRESSURE_MAX
MAX_PRESSURE_MIN	Double	Minimum Maximum allowable pressure of trap after CO ₂ injection (bar)	MAX_PRESSURE_MIN	
MAX_PRESSURE_MEAN	Double	Mean Maximum allowable pressure of trap after CO ₂ injection (bar)	MAX_PRESSURE_MEAN	
MAX_PRESSURE_MAX	Double	Maximum Maximum allowable pressure of trap after CO ₂ injection (bar)	MAX_PRESSURE_MAX	
TEMP_C_MIN	Double	Minimum Temperature (°C) (at the average depth of trap)	TEMP_C_MIN	TEMP_C_MIN
TEMP_C_MEAN	Double	Mean temperature (°C) (at the average depth of trap)	TEMP_C_MEAN	TEMP_C_MEAN
TEMP_C_MAX	Double	Maximum temperature (°C) (at the average depth of trap)	TEMP_C_MAX	TEMP_C_MAX
PERM_MIN	Double	Minimum effective permeability mD	PERM_MIN	PERM_MIN
PERM_MEAN	Double	Mean effective permeability mD	PERM_MEAN	PERM_MEAN
PERM_MAX	Double	Maximum effective permeability mD	PERM_MAX	PERM_MAX
POROSITY_MIN	Double	Minimum porosity (decimal %)	POROSITY_MIN	POROSITY_MIN
POROSITY_MEAN	Double	Mean porosity (decimal %)	POROSITY_MEAN	POROSITY_MEAN
POROSITY_MAX	Double	Maximum porosity (decimal %)	POROSITY_MAX	POROSITY_MAX
FIELD_EXTENT_MIN	Double	Minimum Areal Extent of the trap (km ²)	FIELD_EXTENT_MIN	
FIELD_EXTENT_MEAN	Double	Mean Areal Extent of trap (km ²)	FIELD_EXTENT_MEAN	FIELD_EXTENT_MEAN
FIELD_EXTENT_MAX	Double	Maximum Areal Extent of the trap (km ²)	FIELD_EXTENT_MAX	
VERT_NET_GROSS_MINN	Double	Minimum vertical net: gross (decimal %)	VERT_NET_GROSS_MINN	VERT_NET_GROSS_MINN
VERT_NET_GROSS_MEAN	Double	Mean vertical net: gross (decimal %)	VERT_NET_GROSS_MEAN	VERT_NET_GROSS_MEAN
VERT_NET_GROSS_MAX	Double	Maximum vertical net: gross (decimal %)	VERT_NET_GROSS_MAX	VERT_NET_GROSS_MAX
COMPROCK_MIN	Double	Rock compressibility (1/Pa) - default = 5.00E -5	COMPROCK_MIN	
COMPROCK_MEAN	Double	Rock compressibility (1/Pa) - default = 5.00E -5	COMPROCK_MEAN	
COMPROCK_MAX	Double	Rock compressibility (1/Pa) - default = 5.00E -5	COMPROCK_MAX	

COMPFLUID_MIN	Double	Fluid compressibility (1/Pa) default = 1.00E -4	COMPFLUID_MIN	
COMPFLUID_MEAN	Double	Fluid compressibility (1/Pa) default = 1.00E -4	COMPFLUID_MEAN	
COMPFLUID_MAX	Double	Fluid compressibility (1/Pa) default = 1.00E -4	COMPFLUID_MAX	
FLUID_FILL	Text	Fluid fill of trap, Eg fresh water, gas		FLUID_FILL
SALINITY_BRINE	Double	Total dissolved solids (g/l)	SALINITY_BRINE	SALINITY_BRINE
<i>Not required for GSEU but field remains in the database</i>		<i>Sulphates in Rock or Fluid of Reservoir</i>		<i>SULPHATES_RES</i>
<i>Not required for GSEU but field remains in the database</i>		<i>E.g. pyrite nodules or H2S in reservoir</i>		<i>SULPHATES_RES_DETAI L</i>
<i>Not required for GSEU but field remains in the database</i>		<i>Iron in Rock or Fluid of Reservoir</i>		<i>IRON_RES</i>
<i>Not required for GSEU but field remains in the database</i>		<i>E.g. iron nodules in reservoir, iron stained sandstone</i>		<i>IRON_RES_DETAIL</i>
CO2_RES	Text	CO ₂ in Fluid of Reservoir Text - Yes/no		CO2_RES
CO2_RES_DETAIL	Text	Eg CO ₂ in oil		CO2_RES_DETAIL
CO2_DENSITY	Double	Calculated using separate spreadsheet	CO2_DENSIT	
STATUS	Text	Status i.e. producing, not producing etc - HC daughter units only	STATUS	STATUS
CONNECTIVITY	Text	Connectivity to rest of storage unit (yes / no) - aquifer daughter unit only	CONNECTIVITY	CONNECTIVITY
MIN_UR_GAS	Double	Minimum ultimate recovery gas (bcm - billion m3) - hydrocarbon traps only	MIN_UR_GAS	MIN_UR_GAS
MEAN_UR_GAS	Double	Mean ultimate recovery gas (bcm - billion m3) - hydrocarbon traps only	MEAN_UR_GAS	MEAN_UR_GAS
MAX_UR_GAS	Double	Maximum ultimate recovery gas (bcm - billion m3) - hydrocarbon traps only	MAX_UR_GAS	MAX_UR_GAS
MIN_UR_OIL	Double	Minimum ultimate recover oil (MMcm) - hydrocarbon traps only	MIN_UR_OIL	MIN_UR_OIL
MEAN_UR_OIL	Double	Mean ultimate recover oil (MMcm) - hydrocarbon traps only	MEAN_UR_OIL	MEAN_UR_OIL
MAX_UR_OIL	Double	Maximum ultimate recovery oil (MMcm) - hydrocarbon traps only	MAX_UR_OIL	MAX_UR_OIL
FVF_OIL	Double	Oil Formation Volume Factor (Rcm / scm) - hydrocarbon traps only	FVF_OIL	FVF_OIL
FVF_GAS	Double	Gas Formation Volume Factor (Rcm / scm) - hydrocarbon traps only	FVF_GAS	FVF_GAS
DISCOV_YR	Double	Discovery year - hydrocarbon fields only	DISCOV_YR	DISCOV_YR
FIRST_YR_PROD	Double	First year of production - hydrocarbon fields only	FIRST_YR_PROD	FIRST_YR_PROD
LAST_YR_PROD	Double	Last year of production - hydrocarbon fields only	LAST_YR_PROD	LAST_YR_PROD
SRL	Double	Storage Readiness Level		

SEAL	Text	Name of most widespread primary seal for the storage unit	SEAL	SEAL
PRIM_SEAL_OVERLIE	Text	Does primary seal directly overlie assessment unit (yes/no)		PRIM_SEAL_OVERLIE
PERIOD_MIN_SEAL	Text	Minimum period of seal formation		PERIOD_MIN_SEAL
PERIOD_MAX_SEAL	Text	Maximum period of formation		PERIOD_MAX_SEAL
CHRONSTRAT_MIN_SEAL	Text	Minimum age of seal formation		AGE_MIN_SEAL
CHRONSTRAT_MAX_SEAL	Text	Maximum age of seal formation		AGE_MAX_SEAL
ENV_DEP_SEAL	Text	Primary environment of deposition of seal Eg. Deep sea		ENV_DEP_SEAL
LITHOLOGY_SEAL	Text	predominant lithology of rock		LITHOLOGY_SEAL
SEAL_MINERAL	Text	mineralogy of the seal rock		SEAL_MINERAL
<i>Not required for GSEU but field remains in the database</i>		<i>Sulphates in Seal</i>		<i>SULPHATES_SEAL</i>
<i>Not required for GSEU but field remains in the database</i>		<i>Iron in Seal</i>		<i>IRON_SEAL</i>
MIN_SEAL_THICK	Double	Minimum primary seal thickness (m)	MIN_SEAL_THICK	MIN_SEAL_THICK
FAULT_DEN	Double	Number of faults that cut top of storage formation into seal formation k	FAULT_DEN	FAULT_DEN
FAULT_THR_OVERBURDEN	Text	Presence of faults that cut the top storage formation and primary seal formation (Drop down list, Faults present, displacement greater than thickness of the seal; No faults cut the entire primary seal etc)	VERT_EXTENT_FAULT	FAULT_THR_OVERBURDEN
AVE_FAULT_THR	Double	Average fault throw (m)	AVE_FAULT_THR	AVE_FAULT_THR
MAX_FAULT_THR_RES	Double	Max fault throw in primary seal at top storage formation (m)	MAX_FAULT_THR_RES	MAX_FAULT_THR_RES
RISK_LAT_MIGR	Text	Risk of lateral migration out of unit of assessment (low/medium/high)	RISK_LAT_MIGR	RISK_LAT_MIGR
AVE_DIP_UNIT	Double	Average dip of unit of assessment (degrees)	AVE_DIP_UNIT	AVE_DIP_UNIT
SUSCEPT_RES_DAM	Text	Susceptibility of trap rock to damage when fluids are injected (low/medium/high)	SUSCEPT_RES_DAM	SUSCEPT_RES_DAM
VERT_STRAT_COMPART	Text	Comment field to note vertical reservoir compartmentalisation (e.g. by geological faults)	VERT_STRAT_COMPART	VERT_STRAT_COMPART
HOR_STRAT_COMPART	Text	Comment field to note horizontal storage formation compartmentalisation (eg shale stringers)	HOR_STRAT_COMPART	HOR_STRAT_COMPART
<i>Not required for GSEU but field remains in the database</i>		<i>Fault compartmentalisation in reservoir (yes/no)</i>		<i>FAULT_COMPART</i>
ADVERSE_DIAG	Text	Risk of adverse diagenesis (capture any diagenetic features that might adversely	ADVERSE_DIAG	

		affect storage formation quality, e.g. fibrous illite)		
<i>Not required for GSEU but field remains in the database</i>		<i>Faulting in the seal (yes/no)</i>		<i>FAULT_IN_SEAL</i>
SEAL_OTHER	Text	Secondary or other seal names	SEAL_OTHER	SEAL_OTHER
NO_WELLS_PENETR	Double	Number of existing wells penetrating the storage unit	NO_WELLS_PENETR	NO_WELLS_PENETR
WELL_VINT	Text	Well vintage	WELL_VINT	WELL_VINT
ANNUAL_PRODUCTION_RATE	Double	Annual production rate (oil/gas extraction in mmbly/year or mmscf/year - hydrocarbon traps only, data for whole field)		ANNUAL_PRODUCTION_RATE
WELL_FLOW_RATE	Text	Well flow rate (oil/gas extraction in mmbly/day or mmcf/d - if field is oil/gas)		WELL_FLOW_RATE
NO_ADAND_WELL_PENETR	Double	Number of abandoned wells penetrating storage unit	NO_ADAND_WELL_PENETR	NO_ADAND_WELL_PENETR
AGE_OLD_WELL	Double	Age of oldest abandoned well	AGE_OLD_WELL	AGE_OLD_WELL
VINT_PLAT	Text	Vintage production platform or site	VINT_PLAT	VINT_PLAT
SEISMIC	Text	Seismic available	SEISMIC	SEISMIC
WELLS	Text	Wells available	WELLS	WELLS
MODELS	Text	Models available	MODELS	MODELS
STATUS_RESEARCH	Text	Status of the research on the unit, describes stages of site investigation before any industrial operations	STATUS_RESEARCH	STATUS_RESEARCH
DATA_SOURCE	Text	Data source		DATA_SOURCE
DATA_QUALITY	Text	Data quality and confidence (excellent, good, fair, poor, low)		DATA_QUALITY
REMARKS	Text	Any additional information – e.g. average porosity for oilfield given, polygons not available, trap crosses country boundaries, seal thickness estimated from one well, seismic data held by private companies and not released, saline aquifer used for gas storage, field contains oil and gas, 2% H ₂ S present etc)	REMARKS	REMARKS
COUNTRY	Text		COUNTRY	COUNTRY
COUNTRYCODE	Text		COUNTRYCODE	COUNTRYCODE
LAMBERT_E	Double	Eastings in Lambert projection	LAMBERT_E	LAMBERT_E
LAMBERT_N	Double	Northings in Lambert projection	LAMBERT_N	LAMBERT_N
X_DD	Double	X co-ord in decimal degrees (WGS84)	X_DD	X_DD
Y_DD	Double	y co-ord in decimal degrees (WGS84)	Y_DD	Y_DD
X	Double	X coordinates in any given projection	X	X
Y	Double	y coordinates in any given projection	Y	Y
Projection_Info	Text	Details of projection used for X and Y coords	Projection_Info	Projection_Info

X_GIS	Double	X coordinates from the Hystories web GIS and new entries in EPSG: 4326		X_GIS
Y_GIS	Double	y coordinates from the Hystories web GIS and new entries, in EPSG: 4326		Y_GIS
Projection_Info_HYST	Text	Details of projection used for X_GIS and Y_GIS coords (must be in: WGS84 LL EPSG 4326)		Projection_Info_HYST
Date_Entered	Date/Time	Date the data was entered		Date_Entered
HYST_OR_CO2	Text	Project when this was updated ie Hystories, CO2Stop or GSEU		HYST_OR_CO2

How to cite this product:

GSEU Project (2026). Map of CO₂ storage potential areas (formation, units and traps) at the EU-scale. Version 2.0. Access information on May 15th, 2026 [<https://www.europe-geology.eu/data-tools/map-viewer/>].

Terms of Use / License:

This work is licensed under a Creative Commons Attribution 4.0 International License (CC BY 4.0). Detailed information at <http://creativecommons.org/licenses/by/4.0/>

4. Deep Geothermal Energy Potential

The third section of the **Pan-European Atlas of Sustainable GeoEnergy Capabilities** corresponds to the group of layers that define the objectives for **deep geothermal potential**.

4.1. Defining the deep geothermal approach

The information structure planned under the **GSEU** concept for the **Pan-European Atlas of SGC** is based on information levels structured according to a modified version of a **play-based geothermal exploration approach** (Moeck, 2020) (cf. *Figure 6*) which was already adapted from the hydrocarbon industry. This approach organizes information from **geosystems or geothermal play types**, regions at the Pan-European scale, to **plays or reservoirs** at large to medium scales, and finally to **prospects** at a small scale within any geothermal system.

Information Levels:

- **Level 00** – Natural Thermal Water Springs and Boreholes and Wells)
- **Level 01** – Map of favourable areas at the EU-scale for Deep Geothermal prospecting (Geothermal Play Types).
- **Level 02** – Map of identified and broadly assessed potential natural reservoirs for Deep Geothermal Energy and MT/HT-ATES across Europe
- **Level 03** – Assessed spatially distributed potential reservoirs, with a medium-high level of characterisation (prospect characterisation at the local scale), based on previous EU projects.

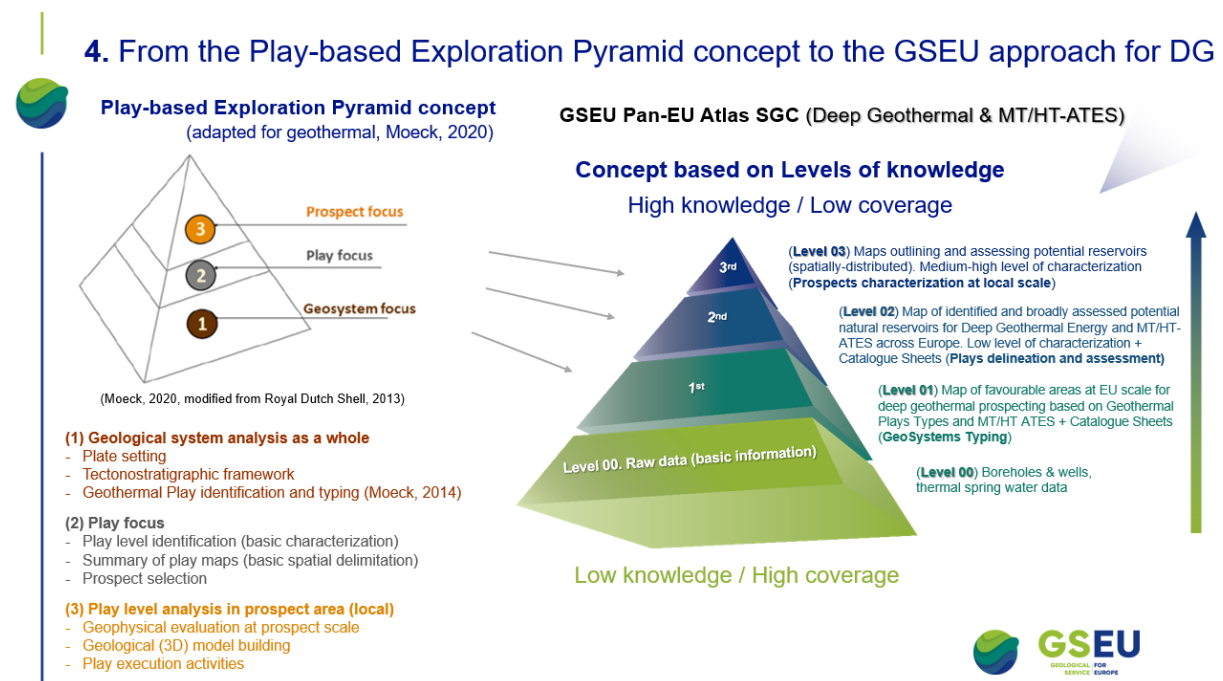


Figure 6: Play-based Exploration Pyramid (Moeck, 2020) applied to the GSEU approach for DG

4.2. The datasets included on this version 1.2. (March 2026)

The current version of the SGC Pan-European Atlas (March 2026), includes, at this stage, the following updated and/or new layers:

- 1) **Level 00: Natural Thermal Water Springs** (+ Boreholes and Wells, already presented in the chapter 2).
- 2) **Level 01. Favourable Areas for Deep Geothermal Prospecting:** provide a new harmonised and generalised distribution map of favourable prospecting areas to take advantage of deep geothermal energy in EU based on identification of geothermal play types - including standardized qualitative attributes (description of potential reservoirs and uses) with the aim of achieving the maximum coverage across EU for the Pan-European Atlas SGC + a collection of sheets describing individually each polygon (downloadable).
- 3) **Level 02. Potential reservoirs for geothermal exploitation and MT/HT-ATES:** provide a harmonised and generalised distribution map of potential reservoirs in which eventual projects for heat extraction and/or heat storage may be implemented. Following the Level 01 procedure the delineation of the polygons aims to cover the maximum extend of geological settings suitable enough for hosting geothermal reservoirs. Each reservoir is accompanied by a downloadable report describing individually the geology, specifications and energy assessment of each polygon.

4.3. Natural Thermal Water Springs (Level 00)

This layer contains the natural thermal springs associated to deep-origin geothermal energy resources. The main threshold constrain for this layer is the temperature of outflowing water. According to the agreed limit values, it must be at least, 5 °C above the mean air temperature of the geographical region where measured.

Table 6 summarises all the items included in the attribute table of the layer for each thermal spring and can be interactively checked in the Atlas visor (<https://www.europe-geology.eu/data-tools/map-viewer/>). Not all the fields have been filled in due to the lack of data. Temperature, geochemical values or related structures are some of the main attributes included in this product.

All the points in the Pan-European Atlas SGC are displayed according to the measured temperature (°C) in the outflowing point. Blue points correspond to lower values and red ones to higher values of this attribute (cf. *Figure 7*).

Table 6: Example and definition of the attributes for thermal springs layer.

Attribute in layer	definition	Example
ID	Unique identification code composed by the NUTS Level 2 code + word "spring" + unique and consecutive number for each well starting from 001.	ES51_spring_001
X_EPSG3035	X coordinates in meters based on the geographic reference system: EPSG:3035 ETRS89 / LAEA Europe (https://epsg.io/3035).	43624946.00
Y_EPSG3035	Y coordinates in based on the geographic reference system: EPSG:3035 ETRS89 / LAEA Europe (https://epsg.io/3035).	463454810.00
SpringName	Free text according to the original well name.	Manantial Codina
Flow_rate	Average steady-state flow rate in L/s.	0.75
Temp	The maximum measured temperature recorded, in °C.	56.50
Thermal water	To specify if the spring is legally designated as thermal water	Thermal water / No thermal water
Geoch_TDS	Total dissolved solids in ppm.	445.25
Geoch_EC	Electrical conductivity of the fluid in µS/cm.	2500.00
Hydro_faci	Hydrogeochemical facies description following the Piper diagram facies classification.	Sodium-bicarbonate
Database	Reference database if the well data is stored there.	https://www.data.gov.uk/dataset/96c70ac5-945c-4f2c-9b55-c14c3da85918/spring-index
Metadata of source data	Link to metadata repository.	
Structure	If known, the relation to a large-scale structure	Extensional fault

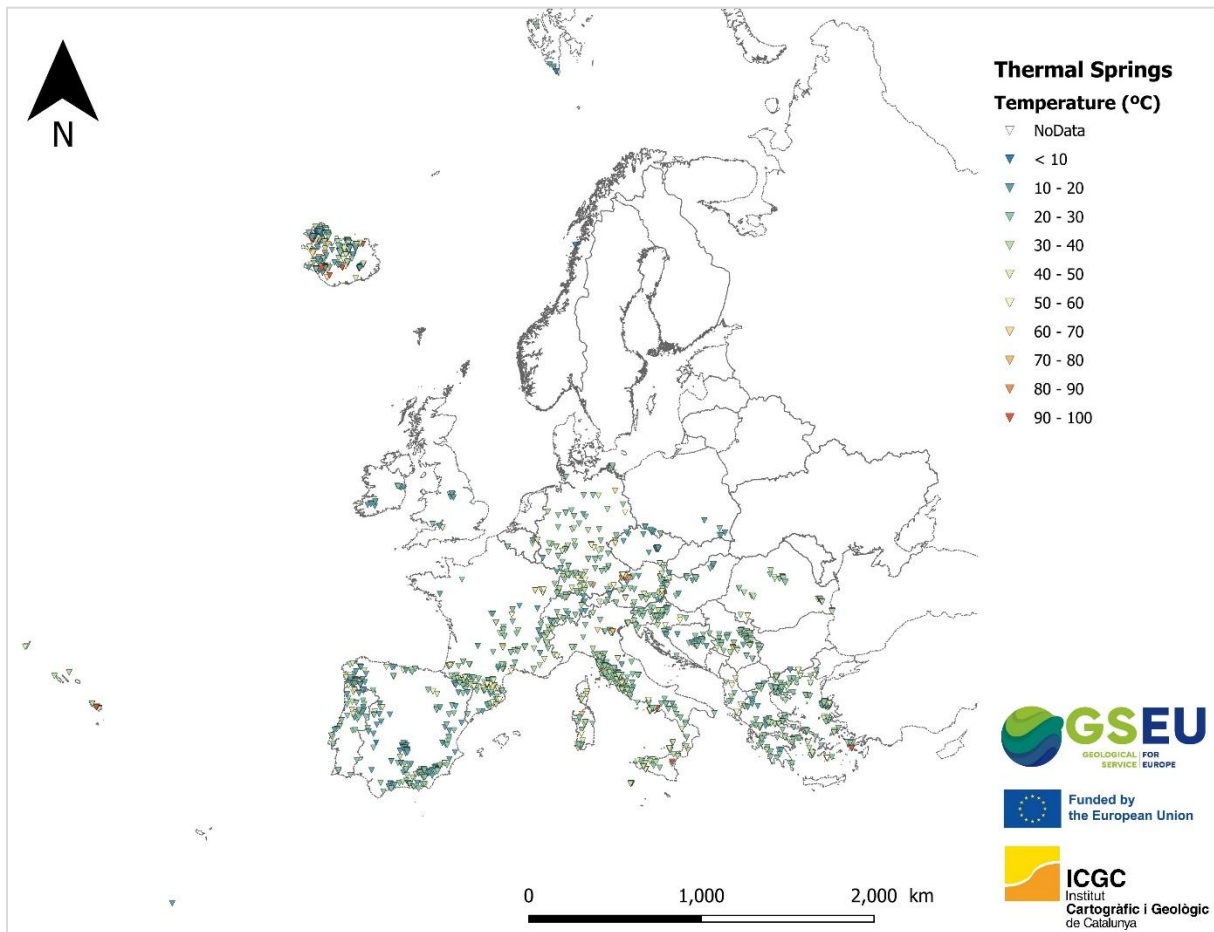


Figure 7: Example of the thermal spring's visualization in the Pan-European Atlas SGC

How to cite this product:

GSEU Project (2026). Map of natural Thermal Water Springs (Level 00). Version 2.0. Access information on May 15th, 2026 [<https://www.europe-geology.eu/data-tools/map-viewer/>].

Terms of Use / License:

This work is licensed under a Creative Commons Attribution 4.0 International License (CC BY 4.0). Detailed information at <http://creativecommons.org/licenses/by/4.0/>.

4.4. Favourable Areas for Deep Geothermal Prospecting - Geothermal Play Types (Level 01)

This layer encompasses the concept of Geothermal Play Types (GPT), which was firstly proposed by Inga Moeck (2014), as a result of the expertise and experience acquired from the Oil & Gas industry. It refers to the characterisation and classification of the natural geothermal energy systems mainly based on the type of heat transport and the effects of geological controls and structural setting. The main aim is to identify areas with favourable geologic conditions to potentially host deep-origin geothermal resources.

Figure 8 represents a summary of the two main types of Geothermal Play Types firstly published in 2014 according to the type of heat transport and classified as follows:

- 1) Convection-Dominated Geothermal Plays (CV)
- 2) Conduction-Dominated Geothermal Plays (CD)

1	Volcanic field type	Plutonic type	Extensional domain type
2	<i>Java-Kamojang</i>	<i>Larderello</i>	<i>Bradys (Basin and Range)</i>
3	Magmatic arcs Mid oceanic ridges Hot spots	Young orogens Post-orogenic phase	Metamorphic core complexes Back-arc extension Pull-apart basins Intracontinental rifts
	Magma chamber, intrusion	Young intrusion+extension	Thinned crust → elevated heatflow
4	Active magmatism (volcanism)	Recent plutonism	Active extensional domain
5	Convection dominated systems		
6	-	Fault controlled Magmatic	+
	+		-
1	Intracratonic Basin Type	Orogenic Belt Type	Basement Type
2	<i>Paris Basin</i>	<i>Unterhaching (Germany)</i>	<i>Habanero (Australia)</i>
3	Intracratonic/Rift basins Passive margin basins	Fold-and-thrust belts Foreland basins	Intrusion in flat terrain Heat producing element rock
	Sedimentary aquifers Permeability/porosity with depth	Sedimentary aquifers Permeability/porosity with depth Fault and fracture zones	Hot intrusive rock (granite) Low porosity/low permeability Fault and fracture zones
4	hydrothermal	hydrothermal	petrothermal
5	Conduction dominated systems		
6	-	Fault/fracture controlled Litho-/biofacies controlled	+
	+		-

Figure 8: Geothermal play classification from Moeck, I. (2014).

This classification (cf. Figure 8) was slightly updated and published in a second paper (Moeck, I. & Beardsmore, G., 2014), where new subcategories of convective Geothermal Play Types were proposed and described. Indeed, in Moeck, I. et al., (2019) two new subcategories were proposed for the conductive CD2 Geothermal Play Type (CD2a - Foreland Basin; CD2b - Adjacent Orogenic Belt).



Type		Geologic Setting	Heat Source	Dominant Heat Transport Mechanism	
Convection Dominated	CV-1: Magmatic	CV-1a: Extrusive	Magmatic Arcs, Mid Oceanic Ridges, Hot Spots	Active Volcanism, Shallow Magma Chamber	Magmatic-hydrothermal Circulation
		CV-1b: Intrusive	Magmatic Arcs, Mid Oceanic Ridges, Hot Spots	Active Volcanism, Shallow Magma Chamber	Magmatic-hydrothermal Circulation, Fault Controlled
	CV-2: Plutonic	CV-2a: Recent or Active Volcanism	Convergent Margins with Recent Plutonism (< 3 Ma), Young Orogens, Post-orogenic Phase	Young Intrusion+Extension, Felsic Pluton	Magmatic-hydrothermal Circulation, Fault Controlled
		CV-2b: Inactive Volcanism	Convergent Margins with Recent Plutonism (< 3 Ma), Young Orogens, Post-orogenic Phase	Young Intrusion+Extension, Felsic Pluton, Heat Producing Element in Rock	Hydrothermal Circulation, Fault Controlled
	CV-3: Extensional Domain	Metamorphic Core Complexes, Back-arc Extension, Pull-apart Basins, Intracontinental Rifts	Thinned Crust+Elevated Heatflow, Recent Extensional Domains	Fault Controlled, Hydrothermal Circulation	
Conduction Dominated	CD-1: Intracratonic Basin	Intracratonic/Rift Basins, Passive Margin Basins	Lithospheric Thinning and Subsidence	Litho/Biofacies Controlled	
	CD-2: Orogenic Belt	Foreland Basins within Fold-and-thrust Belts	Crustal Loading and Subsidence Adjacent to Thickened Crust	Fault/Fracture Controlled, Litho/Biofacies Controlled	
	CD-3: Crystalline Rock - Basement	Intrusion in Flat Terrain	Heat Producing Element in Rock, Hot Intrusive Rock	Hot Dry Rock, Fault/Fracture Controlled	

Figure 9: Geothermal play classification from DARLINGe Interreg Project, Basic concepts of deep geothermal Energy (2017), based on Moeck, I. & Beardsmore, G., (2014).

The layer development process was based on the preparation and collection of data interpreted by the partners in each country, followed by a harmonisation phase and the subsequent compilation of the polygons for each geothermal play type across EU (cf. Figure 9) according to Moeck's (2014) classification. The interpretation carried out by the partners to establish the geothermal context considered all available information, including geological mapping, geophysical data, borehole and well measurements, the location of hot springs, and previous models, among others. The classification includes some examples and provides restrictions as a guide for its application in real-life cases.

The v2.0 (2026) considers some information provided referring the potential areas for offshore geothermal power generation (several areas off the northern coast of Norway and eastern Malta). More information in this regard will be added in next updates.

The white space in between polygons usually refers to the lack of exploration data to legitimate its classification into a group. The acquisition of new data may lead to the classification of white areas into new added polygons corresponding to new 'favourable areas' based on the Geothermal Play Types classification scheme, in subsequent updates of the Atlas.

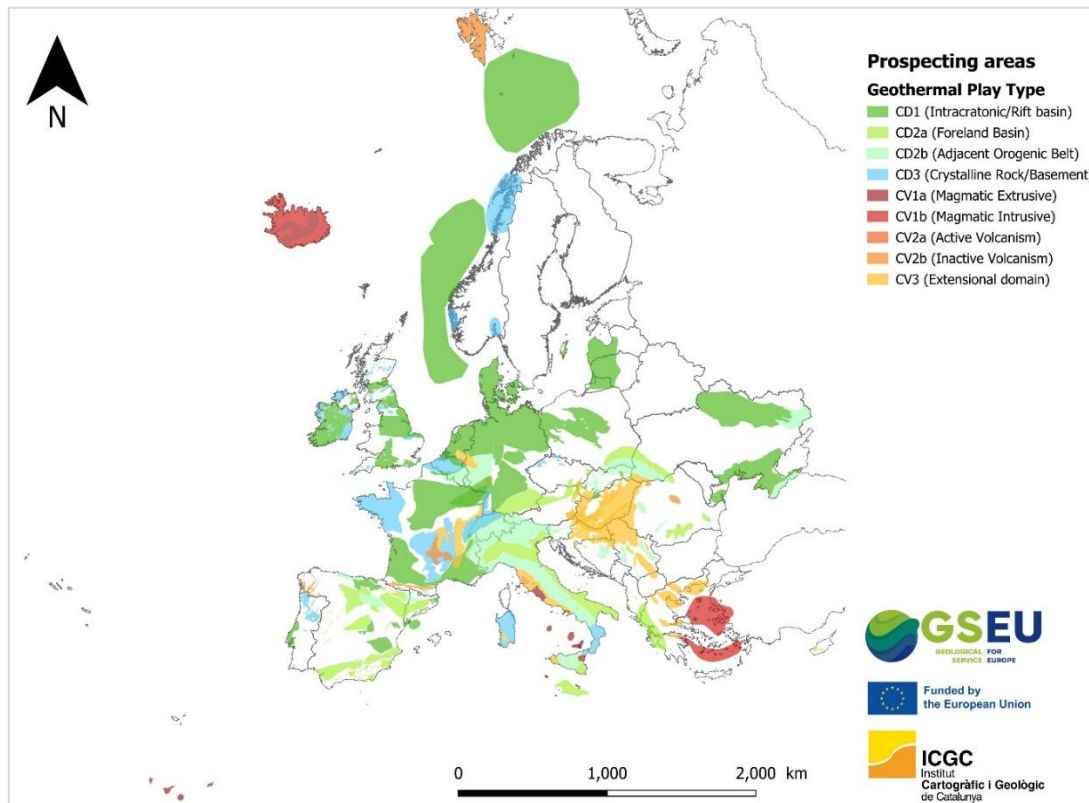


Figure 10: Example of the Favourable Areas for Deep Geothermal Prospecting (Geothermal Play Types) visualization in the Pan-European Atlas SGC.

All the items included in the attribute table of the layer for each Geothermal Play Type can be interactively checked in the Atlas visor (<https://www.europe-geology.eu/data-tools/map-viewer/>). The attributes were selected from the classification of Geothermal Play Types according to the best suitable option in any geothermal and geological system.

Each polygon of this layer was described, including the main potential reservoirs of deep-origin geothermal resources and other relevant data that supports the classification of the polygon. This information is, indeed, compiled and presented in a Factsheet accessible through the link in the attribute table of the layer in the EGD visor (Figure 11) as shown in Figure 12.

Go to	Geothermalplaycode	Geothermalplayname	Geographicallocation	Geographicalcountry	Geographicalregion	Conductionconvectiontype	Geothermalplaytype
	HU22_CV3_001	Link... Pannonian basin porous fill	HU22, HU23, HU33, HU32, HU31, AT11, SK02, SK03, SK04, RO42, RO11, RS12, HR02, HR05, HR06, SI03	Hungary, Austria, Slovakia, Romania, Serbia, Croatia, Slovenia	Nyugat-Dunántúl, Dél-Dunántúl, Dél-Alföld, Észak-Alföld, Észak-Magyarország, Burgenland, Zápudné Slovensko.	CV3	Extensional domain

Figure 11: Example of the attribute table of a polygon in the EGD visor.

Pan-EU Atlas of Sustainable Geo-Energy Capacities
Map of favourable areas at the EU-scale for deep geothermal prospecting (Level 01)
Catalog of Geothermal Play Types

Geothermal play name: Pannonian basin porous fill **Geothermal play code:** HU22_CV3_001

Plate tectonic setting Thinned crust, Back-arc extension
Geothermal play type Extensional domain
Geologic habitat Hydrothermal circulation


Geologic controls Litho/biofacies controlled
Main heat transport mechanism Convection
Conduction convection type CV3

The Pan-EU Atlas of Sustainable Geo-Energy Capacities focuses on geothermal energy and geological storage (Carbon Capture and Storage, hydrogen, heat, cold) topics. To assess the deep geothermal potential, it employs a "Levels of Knowledge" approach, providing a gradual and in-depth understanding of geothermal resources following the play-based exploration geothermal pyramid concept (Moeck et al., 2020). Level 00 offers raw data on boreholes, wells, and thermal springs. Level 01 features the "Map of Favourable Areas for Deep Geothermal Prospecting" providing the "Catalog of Geothermal Play Types across the EU" – geosystems or regions with potential – guiding decision-making for further exploration and resource allocation. Level 02 assesses the geothermal reservoir potential within each Favourable Area at the regional scale, while Level 03 delivers detailed 2D/3D assessments at the prospect level.

Location maps



Geothermal plays delimitation maps

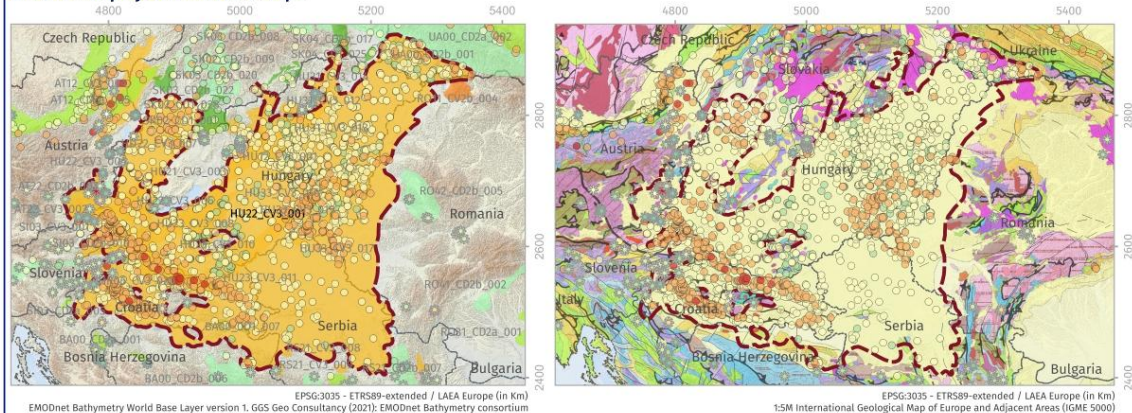

EMODnet Bathymetry World Base Layer version 1, GGS Geo Consultancy (2021); EMODnet Bathymetry consortium

EPSG-3035 - ETRS89-extended / LAEA Europe (in Km) 1:5M International Geological Map of Europe and Adjacent Areas (IGME 5000)

Catalog of Geothermal Play Types defined by Moeck, I.S. (2014):		Boreholes depth (m)		Geothermal play	
CD1	Intracratonic/Rift basin	○	No Data	—	Boundary or structure line
CD2a	Foreland basin	○	0 - 500	—	Fault
CD2b	Adjacent orogenic belt	○	500 - 2000	—	Fault, inferred
CD3	Crystalline rock/Basement	○	2000 - 5000	—	Fold belt
CV1a	Magmatic extrusive	○	> 5000	—	Geological boundary
CV1b	Magmatic intrusive	○		—	Geological boundary, inferred
CV2a	Active volcanism	⊛	No Data	—	Gravity fault
CV2b	Inactive volcanism	⊛	< 10	—	Impact structure
CV3	Extensional domain	⊛	10 - 20	—	Strike/slip fault
		⊛	20 - 30	—	Strike/slip fault dextral
		⊛	30 - 40	—	Strike/slip fault sinistral
		⊛	40 - 50	—	Strike/slip fault, inferred
		⊛	50 - 60	—	Thrust
		⊛	60 - 70	—	Thrust, inferred
		⊛	70 - 80	—	Transform fault
		⊛	80 - 90	—	Transform fault, inferred
		⊛	90 - 100	—	

Lithology		Mesozoic		Palaeozoic		Igneous rocks	
Q	Quaternary	K2	Late Cretaceous	P2	Late Permian	Q2	Late Ordovician
K2	Pliocene	K1	Early Cretaceous	PM2	Early-Middle Permian	Q1	Early Ordovician
M1	Miocene	K	Cretaceous	P	Permian	O2	Ordovician
K	Neogene	J2	Late Jurassic	C2	Late Carboniferous	O1	Ordovician
O3	Oligocene	J1	Early Jurassic	C1	Early Carboniferous	OC	Ordovician-Late Cambrian
E2	Eocene	J	Jurassic	C	Carboniferous	OC	Late Cambrian
P1	Palaeocene	T2	Late Triassic	D3	Middle Devonian	OC	Early Cambrian
P	Palaeogene	T1	Early Triassic	D2	Early Devonian	OC	Late Cambrian
C2	Cenozoic	T	Triassic	D1	Early Devonian	OC	Palaeozoic
NP	Neoproterozoic	Tr	Triassic	D	Devonian	OC	Precambrian
MP	Mesoproterozoic	Tr	Triassic	S3-4	Late Silurian	OC	Quaternary/Palaeogene-Silurian
PP	Palaeoproterozoic	Tr	Mesozoic	S2-3	Early Silurian	OC	Mesozoic
Pr	Proterozoic	S	Silurian	S	Silurian	OC	Palaeozoic
Ar	Archaean					OC	Precambrian
Pr	Precambrian					OC	Precambrian

Description

Basin fill sediments represent the forward accretion sediment packages that deposited during the gradual fill up of the Lake Pannon during Late Miocene and Early Pliocene, originated in the surrounding uplifting Alpine and Carpathian Mountain belts. The resulting siliciclastic sequences with low thermal conductivity (the "Pannonian" sedimentary succession) can be as thick as several thousand meters in the deepest sub-basins. This play consists of the upper part of the Pannonian sedimentary sequences down to a depth of about 2.000 m b.g.l., which is characterized by a gravity driven regional groundwater flow system recharged from precipitation.

The main reservoirs are:

- The Zagya and Újfalu sandstones, characterized by large to very large permeability values, with limited interbeddings of poorly permeable muds and other fine-grained beds.
- In general, the temperature distribution shows a good correlation with sediment thickness ranging on average from 50–60 °C at areas with sediment thickness up to 1.000 m, and displays the highest values of 100–120 °C in the centres of the deepest sub-basins where sediment thickness is over 2.000 m.
- In Austria the Styrian Basin is the largest Neogene basin, which represents the orogen-basin transition zone. Miocene Sarmat and Baden sediments in a range of 470-2.020 m b.g.l. Miocene Karpatian basal conglomerates in a range of 1.200-2.200m.
- In Slovakia the Danube Basin central depression: Pannonian and Pontian sands, sandstones, gravels, conglomerates, at top depth: 200 - 2.900 m b.g.l. and modeled temperatures of 17 - 135 °C. In the Horné Strháre - Trenč Graben primary reservoirs are Miocene sands, gravels and sandstone equivalents, at top depth: 60 - 1.800 m b.g.l. with modeled reservoir temperature of 16 - 85 °C. Reservoirs are stratified, hydraulic connection is questionable. In the Moldavská kotlina Basin identified reservoirs are in Badenian, Sarmatian and Pannonian sands and sandstones, at top depth: 10 - 1.550 m b.g.l. and modeled temperature of 12 - 144 °C, stratified and questionable vertical connectivity. Existence of deep reservoirs of Mesozoic basement (Mid Triassic) is inferred

Geothermal play name: Pannonian basin porous fill **Geothermal play code:** HU22_CV3_001

Description

by analogy. Maximum sampled wellhead temperature: 37 °C.

- In Serbia the depth of Neogene sediments are 0.4-3.3 km, except Mt. Fruška Gora and Mt. Vršacke planine. The identified potential reservoirs are Pontian sandstone and sand (porous rocks) which extend from the surface up to 2.000 m b.g.l. in the northern-east part of the Pannonian basin, while the thickness of these sediment at the south Banat is 500 m and at the northern-west part of Bačka is 300 m. The groundwater temperature is up to 82 °C and the geothermal gradient is 4.5-6.2 °C/100 m.
- The Croatian part of the PBS can be subdivided into Mura, Drava, Sava and Slavonija-Srijem Depressions, plus smaller Bjelovar, Hrvatsko zagorje, Karlovac and Požeška subdepressions. Basin fill is a succession of predominantly siliciclastic rocks (sandstones and marls in different thicknesses and proportions in diverse (sub)depressions), and some biocalcarenes, all with significant potential for thermal water production. Thickness of basin fill reaches up to 5.500 m in the Mura and 7.000 m in Drava depression. Due to thinned crust and high geothermal gradients at such depths high temperatures are present (up to 200 °C in depocenters).
- Basin fill sediments in NE Slovenia are siliciclastic succession with the greatest potential for thermal water production. They consist of Mura Formation – delta front and delta plain sediments (correspond to The Zagya and Újfalu Fms in Hungary) which are highly permeable with loose sandy aquifer layers with good connectivity and regional interconnection. The alluvial gravely Ptuj-Grad Formation contains lukewarm water, as thermal and cold drinking water. The Goričko, Slovenske gorice and Haloze Hills are recharge areas for the regional flow and cross-border thermal water, flow is mainly from Slovenia to Hungary. The maximum depth of interest is up to 2 km but mostly layers up to 1.5 km are tapped, yielding water with 60-65 °C and flow rates max. about 25 l/s per a well.
- In Ukraine Neogene Molassa type basin is subdivided into two domains: Mukachevo basin on west and Solotvyno basin on east. Basin fill thickness do not exceed 4 km of Neogene sediments. The region has widely spreaded faults of pull-apart basin origin. Heat flow density vary between 80 and 130 mw/m2 with significant anomalies, controlled by geological settings. Deep horizons are underexplored, so reservoir temperature and water flow rates uncertain.

References

Alexandrescu M., Burghina V., Gheorghiu G., Graf C., Popescu M. (1984). Sinteza lucrarilor de prospectiune si explorare pentru ape geotermale din Campia de Vest, Raport IPGG, XV/6.

Borović, S., Marković, I. (2015). Utilization an tourism valorisation of geothermal waters in Croatia. // Renewable and sustainable energy reviews, 44, 52-63.

Borović, S., Marković, T., Larva, O., Brkić, Ž., Mraz, V. (2016). Mineral and Thermal Waters in the Croatian Part of the Pannonian Basin. In: Mineral and Thermal Waters of Southeastern Europe / Papić, Petar (ed). Springer, Cham, 31-45.

Demetrescu C., Polonic G. (1989). The evolution of the Pannonian Depression (Romanian sector) as derived from subsidence and heat flow data. Tectonophysics, 164, 287 - 299.

Franko, O., Remšík, A., Fendek, M., Bodiš, D., Priehodská, Z., Vass, D., Král, M., Jančí, J. (1984). Geotermálna energia centrálnej depresie podunajskej panvy - prognózne zásoby [manuscript]. ŠGÚDŠ, Bratislava, 759 p.

Franko O., Remšík, A., Fendek, M., (1995). Atlas of geothermal energy of Slovakia. ŠGÚDŠ, Bratislava.

Fričovský, B., Černák, R., Fordinál, K., Benková, K., Pelech, O., Marcin, D., (2023). Geothermal energy use – Country update for Slovakia (2019 – 2022). Proceedings World Geothermal Congress 2023, Beijing, China, 1-14.

Fričovský, B., Černák, R., Vízí, L., Fordinál, K., Marcin, D., Benková, K., Bottlík, F., Bahnová, N., Míchalko, J. (Q/IV, 2024). Analýza možností trvalo udržateľného využitia a využívania zdrojov geotermálnej energie na Slovensku – I. časť. [manuscript]. ŠGÚDŠ, Bratislava.

Gordienko, V. V., Gordienko, I. V., Zavgorodnyaya, O. V., Logvinov, I. M., Tarasov, V. N. and Usenko O. V., (2004). Geothermal atlas of Ukraine. Korvin Press, Kiev.

More Information



Contact
<https://www.geologicalservice.eu/>
<https://www.europe-geology.eu/>
geotermia@icgc.cat









 Pan-EU Atlas of Sustainable Geo-Energy Capacities Map of favourable areas at the EU-scale for deep geothermal prospecting (Level 01) Catalog of Geothermal Play Types	
Geothermal play name: Pannonian basin porous fill	Geothermal play code: HU22_CV3_001
References <p>Horváth, F., Musitz, B., Balázs, A., Végh, A., Uhrin, A., Nádor, A., Koroknai, B., Pap, N., Tóth, T., Wörum, G. (2015). Evolution of the Pannonian basin and its geothermal resources. – <i>Geothermics</i> 53, 328–353. https://doi.org/10.1016/j.geothermics.2014.07.</p> <p>Kronome, B., Baráth, I., Nagy, A., András, U., Gyula, M., Berka, R., Černák, R. (2014): Geological model of the Danube Basin; transboundary correlation of geological and geophysical data. <i>Slovak Geological Magazine</i>, 2(2014), 17–37.</p> <p>Kutas R., Majcín D. (2014). 'Geothermal Conditions of Neo-Volcanism Zones of the Transcarpathian Trough'. <i>Kyiv National University Bulletin. Geology</i>. 66(3):39–64. (in Russian).</p> <p>Lenkey, L., Mihályka, J., Paróczy, P. (2021). Review of geothermal conditions of Hungary. <i>Földtani Közlemények</i> 151/1, 65–78. https://doi.org/10.23928/foldt.kozl.2021.151.1.65.</p> <p>Loktev A. A., (2020). Thermal regime of Transcarpathian. <i>Mineral resources</i>. N. 2, pp. 25–31. (in Ukrainian).</p> <p>Marcin, D., Benková, K., Fričovský, B., Bodiš, D., Bottlík, F., Kordík, J., Striček, I., (2020). Hodnotenie stavu geotermálnych útvarov podzemných vôd na území Slovenskej republiky. [manuscript]. Štátny geologický ústav Dionýza Štúra, Bratislava, 312 p.</p> <p>Martinovič, M., Vukičević, Z., Zlokolica Mandić, M. (2010). Geothermal Atlas of Vojvodina, Provincial Secretariat for Energy, Construction and Transport, Autonomous Province of Vojvodina, Republic of Serbia.</p> <p>Milivojević, M. Martinovič, M. (2005). Geothermal energy possibilities, exploration and future prospects in Serbia, <i>World Geothermal Congress, Antalya Turkey</i>. Moeck, I. S. (2014). Catalog of geothermal play types based on geologic controls. <i>Renewable and Sustainable Energy Reviews</i>, 37, 867–882. https://doi.org/10.1016/j.rser.2014.05.032.</p> <p>Moeck I. S., Dussel M., Weber J., Schintgen T., & Wolfgramm M. (2020). Geothermal play typing in Germany, case study Molasse Basin: a modern concept to categorise geothermal resources related to crustal permeability. <i>Netherlands Journal of Geosciences</i>, 98. https://doi.org/10.1017/njg.2019.12.</p> <p>Nádor, A., Lapanje, A., Toth, G. et al. (2012). Transboundary geothermal resources of the Mura-Zala basin: a need for joint thermal aquifer management of Slovenia and Hungary. <i>GEOLOGIJA</i>, 55/2, 209–224. https://doi.org/10.5474/geologija.2012.013.</p> <p>Nádor, A., Zilahi-Sebess, Rotár-Szalkai, Á., Gulyás, Á., Markovic, T. (2019). New methods of geothermal potential assessment in the Pannonian basin – <i>Netherlands Journal of Geosciences</i>, Volume 98, e10. https://doi.org/10.1017/njg.2019.7.</p> <p>Nádor, A., Lenkey, L. (in press). Geothermal resources of Hungary: a play-based review. In Tari, G. (ed): <i>Geo-energy resources of the Pannonina Basin</i>, <i>Geol Soc London Special Issue</i>.</p> <p>Pavelic, D., Kovacic, M. (2018). Sedimentology and stratigraphy of the Neogene rift-type North Croatian Basin (Pannonian Basin System, Croatia): A review. <i>Marine and Petroleum Geology</i>, 91, 455–469.</p> <p>Remšik, A., Franko, O., Fendek, M., Bodiš, D. (1990). Geotermálne vody podunajskej a viedenskej panvy. <i>Mineralia Slovaca</i>, 22, 241–250.</p> <p>Rman, N., Gál, N., Marcin, D., Weibold, J., Schubert, G., Lapanje, A., Rajver, D., Benková, K., Nádor, A. (2015). Potentials of transboundary thermal water resources in the western part of the Pannonian basin. <i>Geothermics</i> 55, 88–98. https://doi.org/10.1016/j.geothermics.2015.01.013.</p> <p>Rman, N., Bălan, LL., Bobovečki, I. et al. (2020). Geothermal sources and utilization practice in six countries along the southern part of the Pannonian basin. <i>Environmental Earth Sciences</i> (2020) 79:1. https://doi.org/10.1007/s12665-019-8746-6.</p> <p>Rotár-Szalkai, Á., Nádor, A., Szócs, T., Maros, Gy., Goetzl, G., Zekiri, F. (2017). Outline and joint characterization of transboundary geothermal reservoirs at the western part of the Pannonian basin – <i>Geothermics</i> 70, pp. 1–16. https://dx.doi.org/10.1016/j.geothermics.2017.05.005.</p> <p>Schwarz g., Ripa m., Thunholm b., Shaw R., Persa D., Bateman K., Ramalho E., Carvalho G., et al. (2016). Chpm2030 Deliverable D1.2: Report On Data Availability</p> <p>Šram, D., Rman, N., Rižnar, I., Lapanje, A. (2015). The three-dimensional regional geological model of the Mura-Zala Basin, northeastern Slovenia. <i>Geologija</i>, 58/2, 139–154. https://doi.org/10.5474/geologija.2015.011.</p> <p>Švasta, J., Gregor, M., Tóth, G., Remšik, A., Černák, R. (2014). Assessing thermal groundwater flow in the Danube Basin by numerical simulations. <i>Slovak Geological Magazine</i>, 2(2014), 37–69.</p> <p>Tari, V., Pamič, J. (1998). Geodynamic evolution of the northern Dinarides and the southern part of the Pannonian Basin. <i>Tectonophysics</i>, 279, 269–281.</p> <p>Tóth Gy., Rman N., Rotár-Szalkai Á., Kerékgyártó T., Szócs T., Lapanje A., Černák R., Remšik A., Schubert G., Nádor A. (2016). Transboundary fresh and thermal groundwater flows in the west part of the Pannonian Basin. <i>Renewable and Sustainable Energy Reviews</i> 57, pp. 439–454. https://doi.org/10.1016/j.rser.2015.12.021.</p> <p>Velic, J., Malvic, T., Cvetkovic, M., Vrbnac, B. (2012). Reservoir geology, hydrocarbon reserves and production in the Croatian part of the Pannonian Basin System. <i>Geologia Croatica</i>, 65(1), 91–101.</p> <p>Veliciu, S. (1994) Geographic distribution of the geothermal Field on Romania's territory, Raport IGR 112/93–94, Geological Institute of Romania.</p>	
More Information  <p>Contact https://www.geologicalservice.eu/ https://www.europe-geology.eu/ geotermia@icgc.cat</p>	
   	
101075609 – GSEU – HORIZON-CL5-2021-D3-02 GSEU v1.0 - March, 2025	

Figure 12: Example of a Factsheet from a geothermal play in Hungary.

How to cite this product:

GSEU Project (2026). Map of Favourable areas at the EU-scale for Deep Geothermal prospecting - Geothermal Play Types areas (Level 01). Version 2.0. Access information on May 15th, 2026 [<https://www.europe-geology.eu/data-tools/map-viewer/>].

Terms of Use / License:

This work is licensed under a Creative Commons Attribution 4.0 International License (CC BY 4.0). Detailed information at <http://creativecommons.org/licenses/by/4.0/>.

4.5. Map of identified and broadly assessed potential natural reservoirs for Deep Geothermal Energy and MT/HT-ATES across EU (Level 02)

This layer represents the concept of potential natural geothermal reservoir. It describes and delineates geological formations / units, sufficiently favourable to host natural geothermal reservoirs – i.e., containing the three key components: sufficient permeability, temperature and fluid – that could potentially be exploited. These systems may rely on the potential extraction of heat from the reservoir using either conventional technologies in hydrothermal deep aquifers (using classical doublets/triplets with vertical wells, deviated or multilateral wells) as well as emerging Next-generation geothermal referring to reservoir-independent technologies – according to the IADC² Geothermal Well Classification system - like Enhanced Geothermal Systems (EGS) and closed-loop systems also called Advanced Geothermal Systems (AGS). The layer also encompasses geological environments suitable for underground thermal energy storage using ATES (but also BTES systems), where medium- or high-temperature fluids can be injected to thermally recharge the reservoir and enable efficient subsurface heat storage and retrieval.

The layer development process was based on the preparation and collection of data interpreted by the partners in each country, followed by a harmonisation phase and the subsequent compilation of the polygons across EU (cf. *Figure 13*). Each polygon is directly linked to a downloadable factsheet summarising the main attributes of the potential reservoir, its description, and the identification of the favourable area to which it belongs (Level 01, referring to the geothermal play-type area), together with - in the majority of cases - a generalised, lumped, and stochastic assessment of the Heat in Place (HIP), which refers to the potential amount of heat contained within and potentially extractable from the reservoir, and/or the Heat Storage Potential (HSP), which refers to the potential amount of heat that could be stored within the reservoir. The interpretation carried out by the partners to establish the geothermal context considered all available information, including geological mapping, geophysical data, borehole and well measurements, models, the location of hot springs, and previous 2D/3D models, among other data type.

To maintain hierarchical consistency between levels, all potential natural reservoirs described in Level 02 are contained within areas classified in Level 01 as Favourable Areas for Deep Geothermal Prospecting (Geothermal Play Types), directly related to specific geothermal systems driven by

² International Association of Drilling Contractors. (2025). *IADC geothermal well classification* (Issue 1.0). IADC Geothermal Committee. <https://iadc.org/wp-content/uploads/2025/02/IADC-Geothermal-Well-Classification-v1.pdf>

conductive or convective heat transport mechanisms. The white space in between polygons usually refers to the lack of exploration data or the lack of favourable geologic scenarios to legitimate its classification as a potential natural geothermal reservoir. The acquisition of new data may lead to enlarge the current polygons and/or delineate new areas with that purpose.

The outlined potential reservoirs and the original data used in the assessments may come from direct measurements, calculated estimates, or values inferred from nearby projects and/or theoretical references found in the literature. This layer integrates varying levels of data reliability, and the inclusion or exclusion of reservoirs is guided by the expert judgment of each country's scientific committee from the geological services contributing to the GSEU Project.

Due to variations in data availability and national capacities, some countries were unable to provide reservoir information or to carry out the assessment of HIP and/or HSP within the current version v2.0 (2026). Results should therefore be interpreted with these considerations in mind.

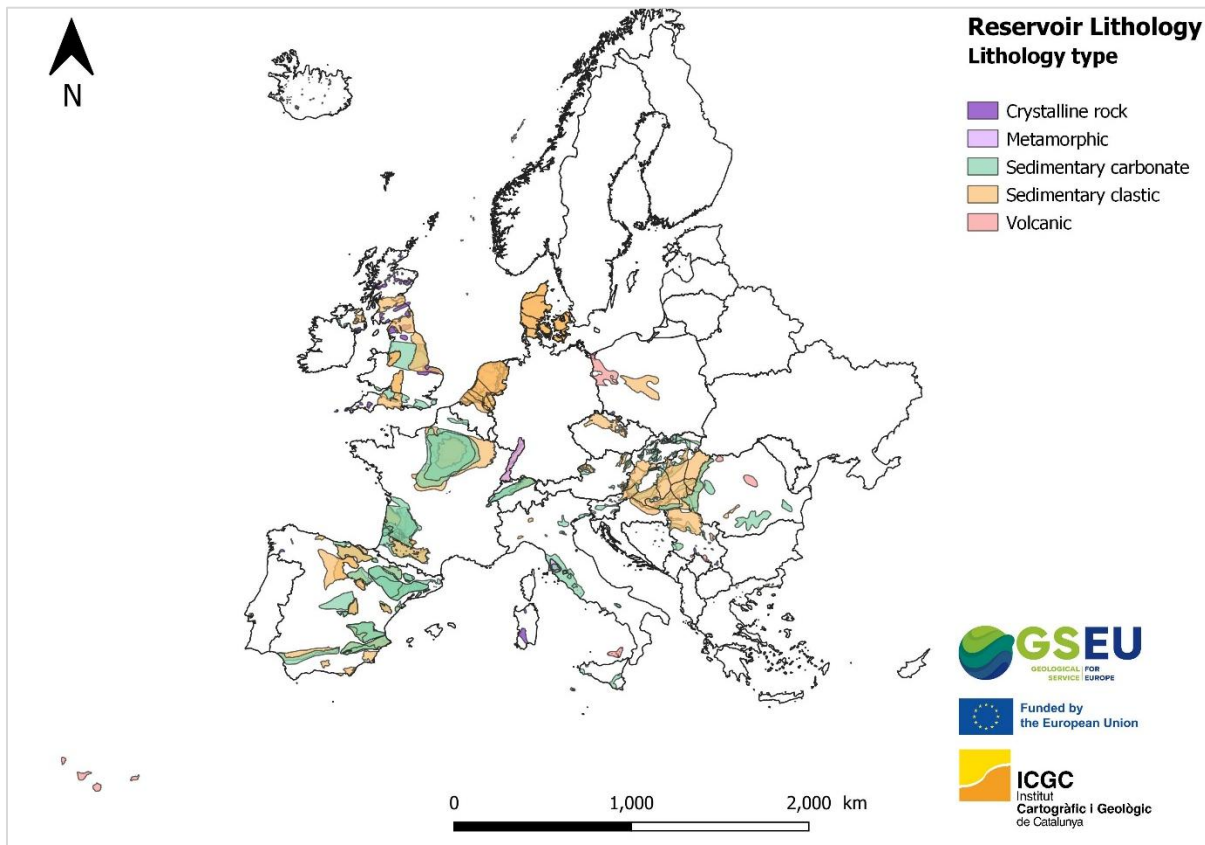


Figure 13: Potential Geothermal Reservoirs' visualization for the lithology attribute in the Atlas.

Eighth different styles have been performed for the most representative attributes of the reservoirs, and are shown in the following figures (from 14 to 20), accompanied by a distribution histogram of the amount of reservoirs per attribute.

All the items included in the attribute table of the layer for each potential reservoir can be interactively checked in the Atlas visor (<https://www.europe-geology.eu/data-tools/map-viewer/>). Each polygon of this layer was described according to the scientific knowledge of the experts' scientists from each partner contributing to the project. This information is, indeed, compiled and presented in a 3-page Factsheet accessible through the link in the attribute table of the layer in the EGDI visor (e.g. *Figure 11*) as shown in *Figure 21*.

How to cite this product:

GSEU Project (2026). Map of identified and broadly assessed potential natural reservoirs for Deep Geothermal Energy and MT/HT-ATES across Europe (Level 02). Version 1.0. Access information on May 15th, 2026 [<https://www.europe-geology.eu/data-tools/map-viewer/>].

Terms of Use / License:

This work is licensed under a Creative Commons Attribution 4.0 International License (CC BY 4.0). Detailed information at <http://creativecommons.org/licenses/by/4.0/>.

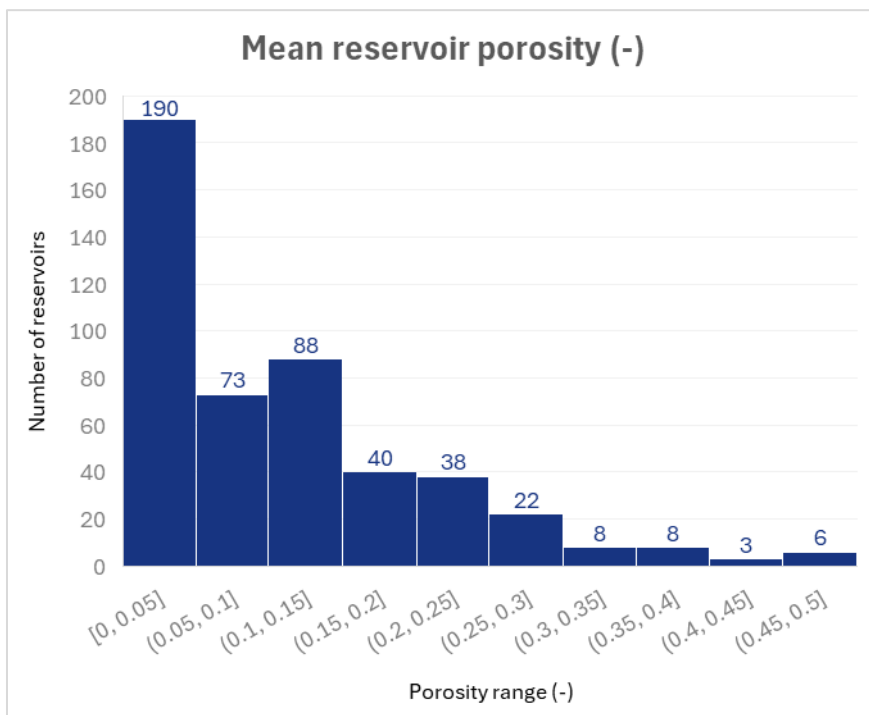
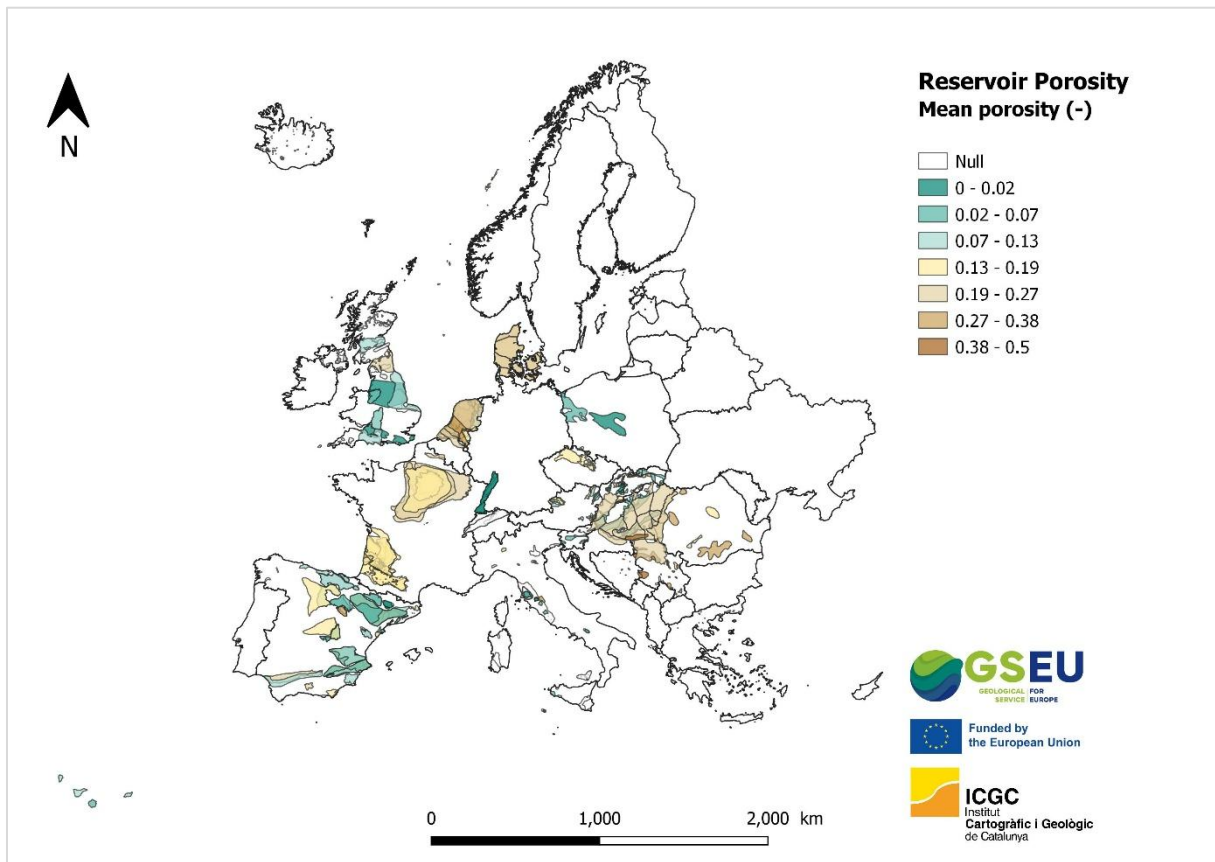


Figure 14: Potential Geothermal Reservoirs' visualization and distribution histogram for the porosity attribute in the Atlas.

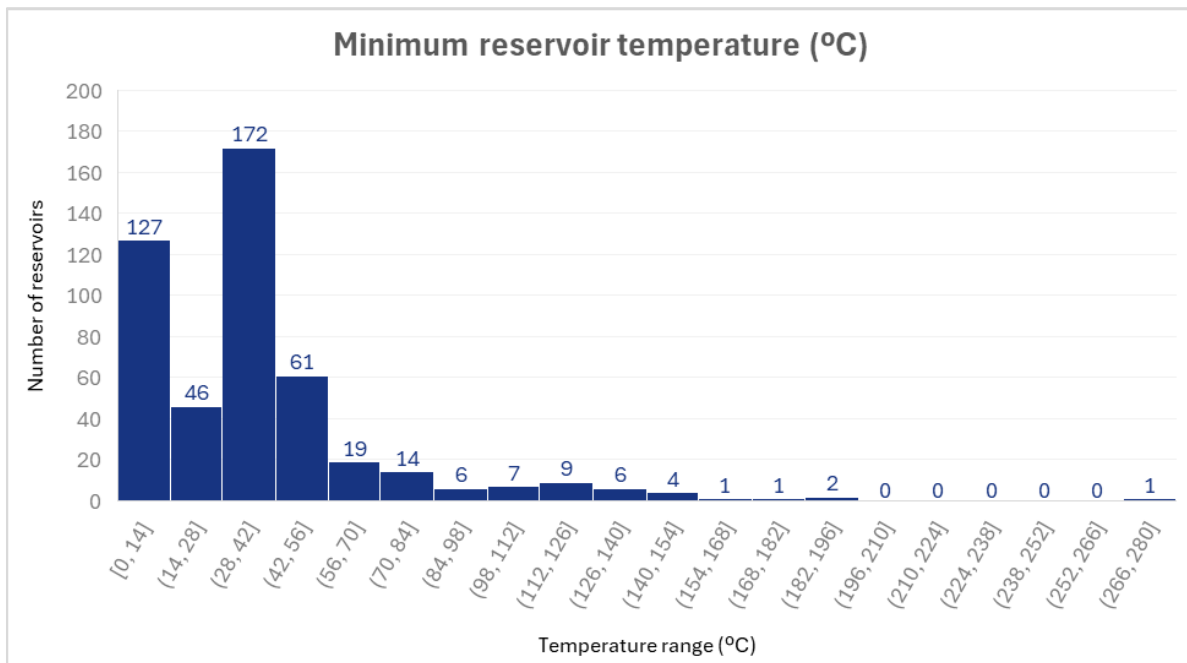
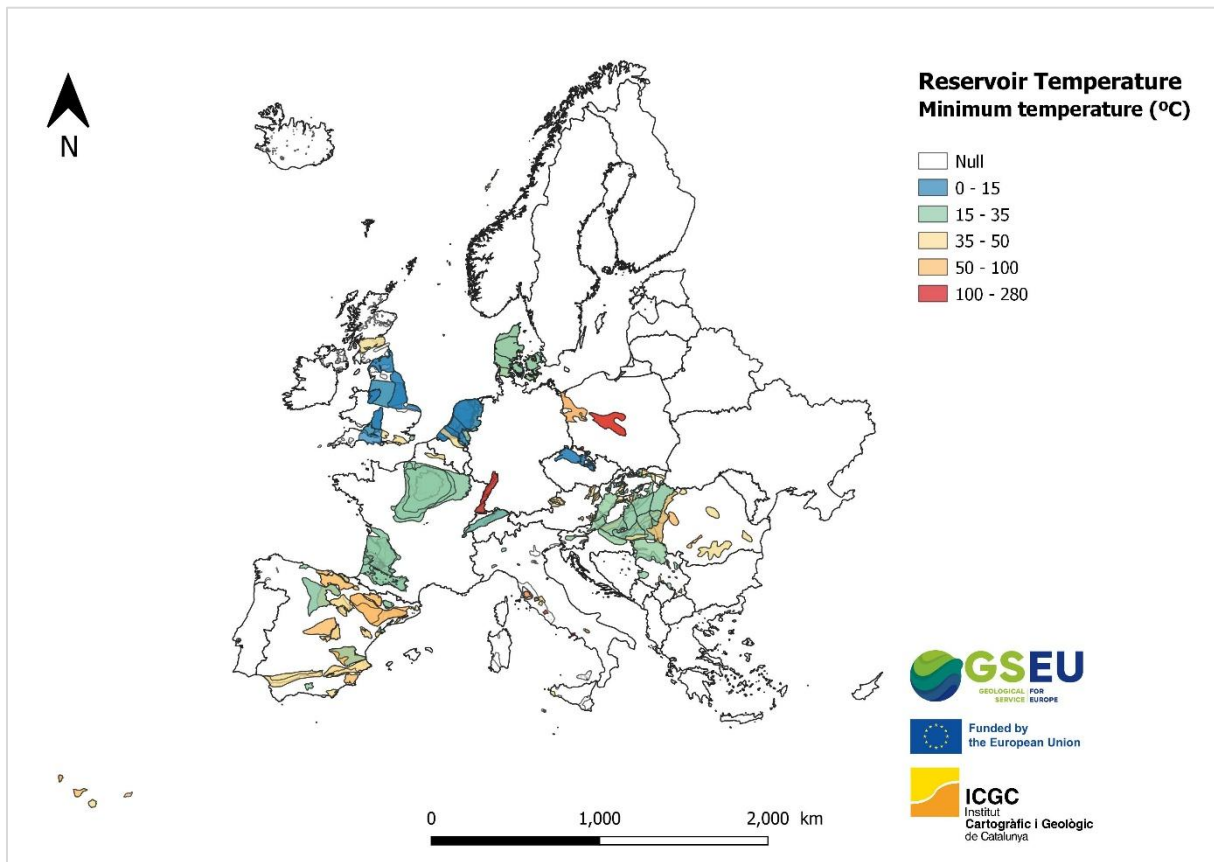


Figure 15: Potential Geothermal Reservoirs' visualization and distribution histogram for the minimum temperature (°C) attribute in the Atlas.

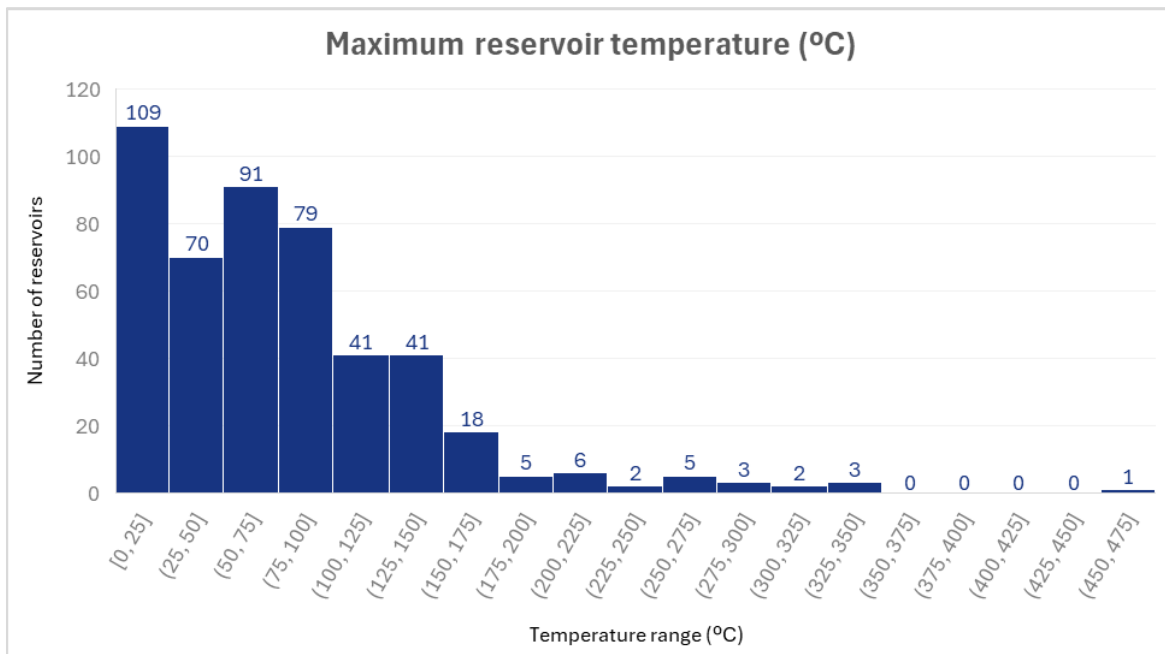
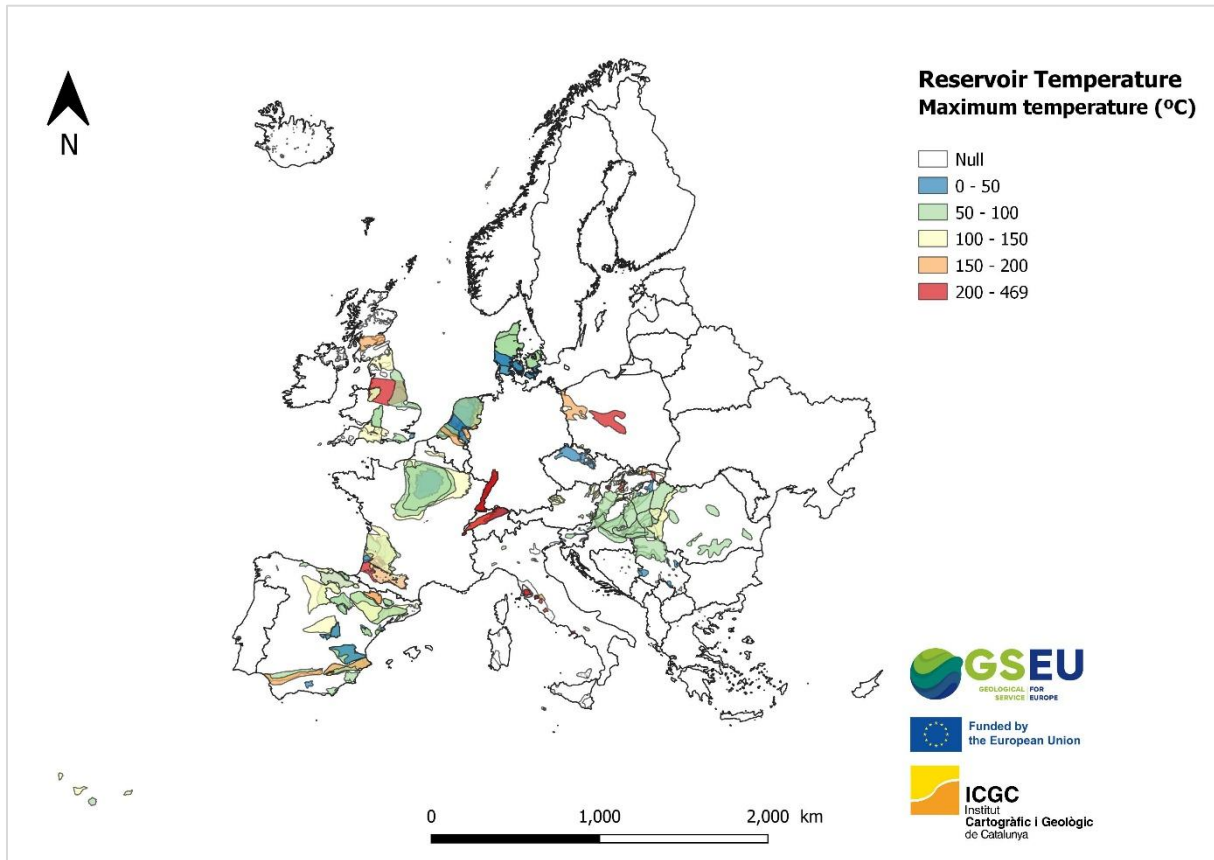


Figure 16: Potential Geothermal Reservoirs' visualization and distribution histogram for the maximum temperature (°C) attribute in the Atlas.

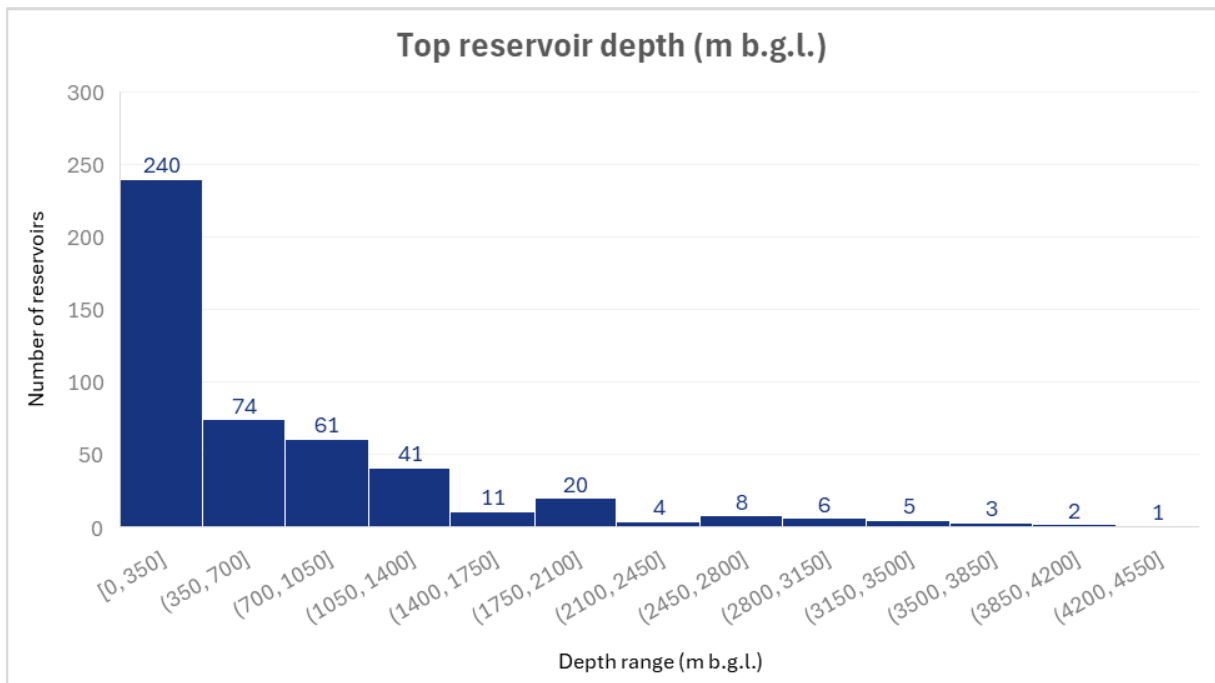
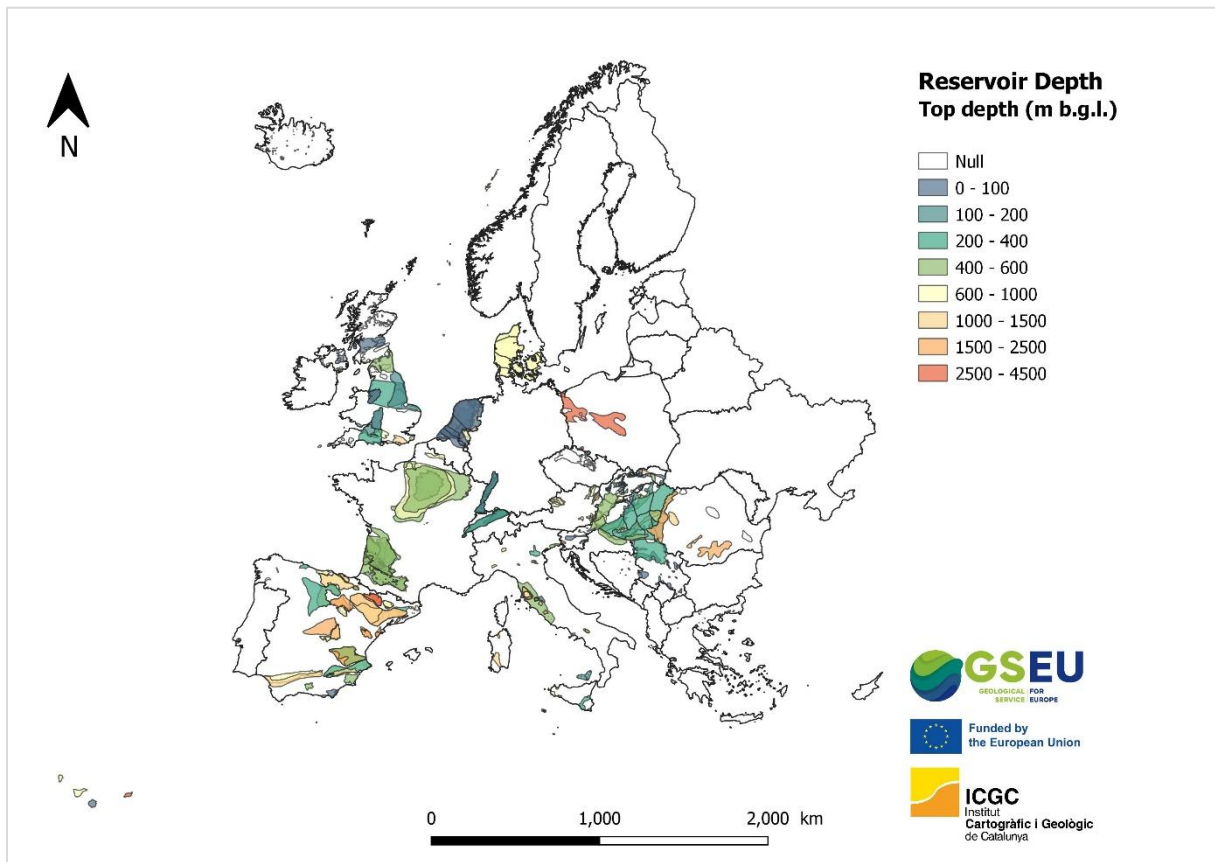


Figure 17: Potential Geothermal Reservoirs' visualization and distribution histogram for the top reservoir depth (m b.g.l.) attribute in the Atlas.

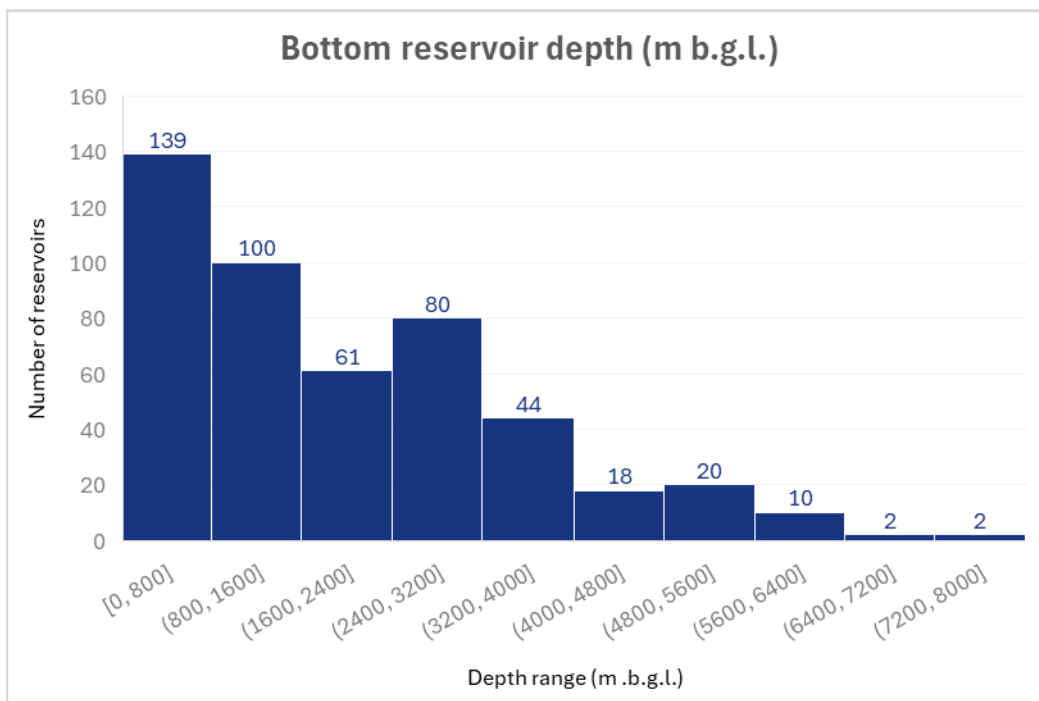
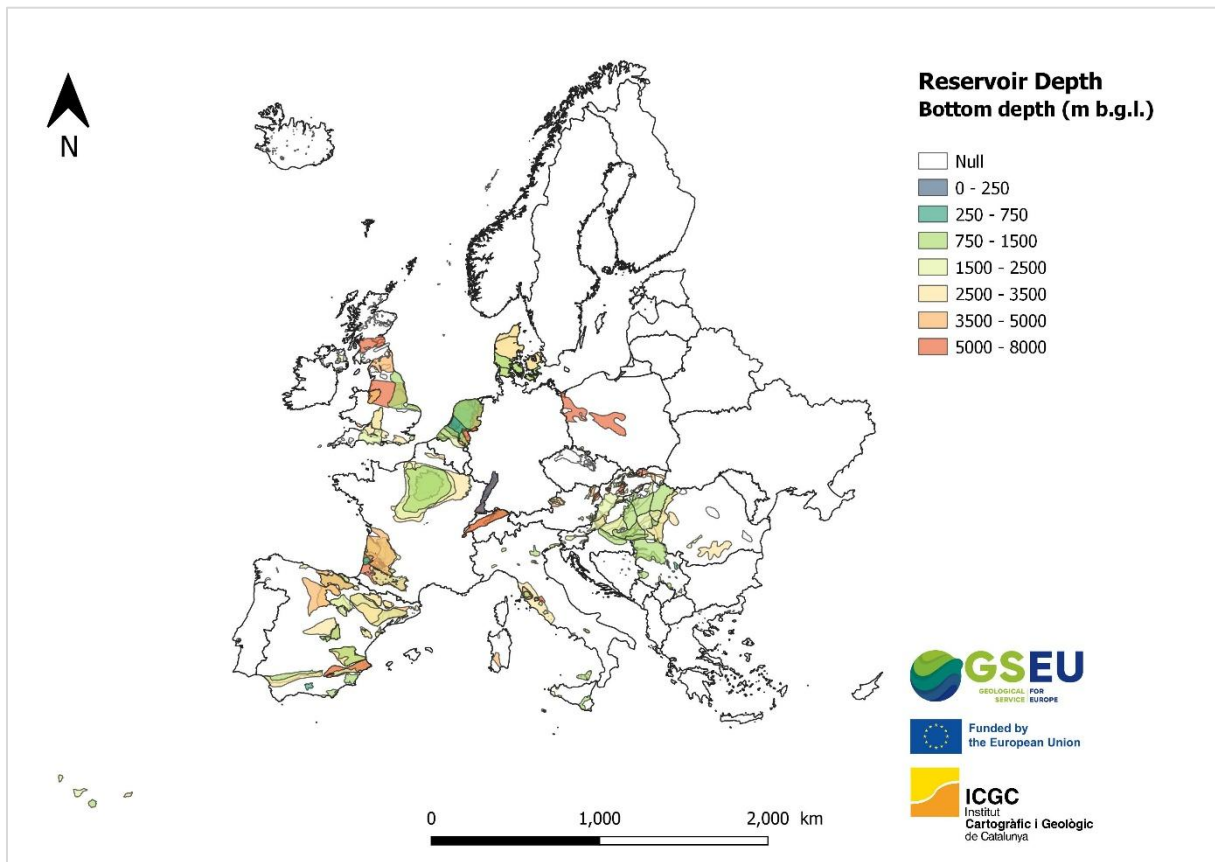


Figure 18: Potential Geothermal Reservoirs' visualization and distribution histogram for the bottom reservoir depth (m b.g.l.) attribute in the Atlas.

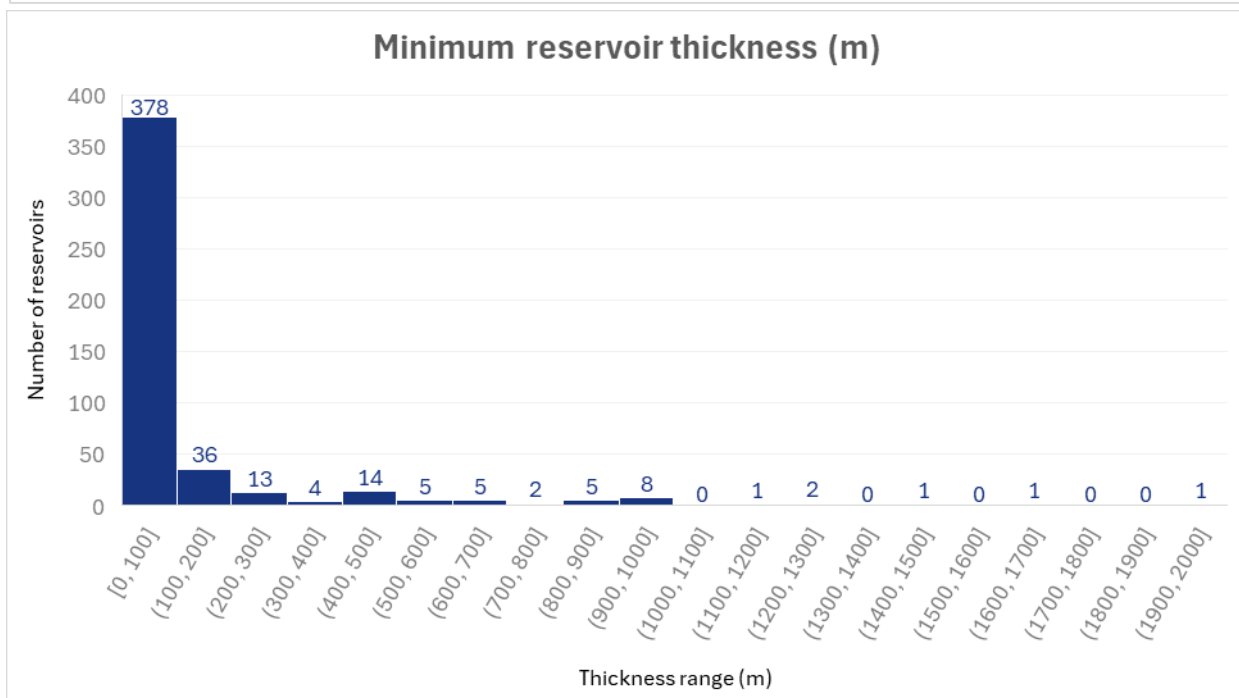
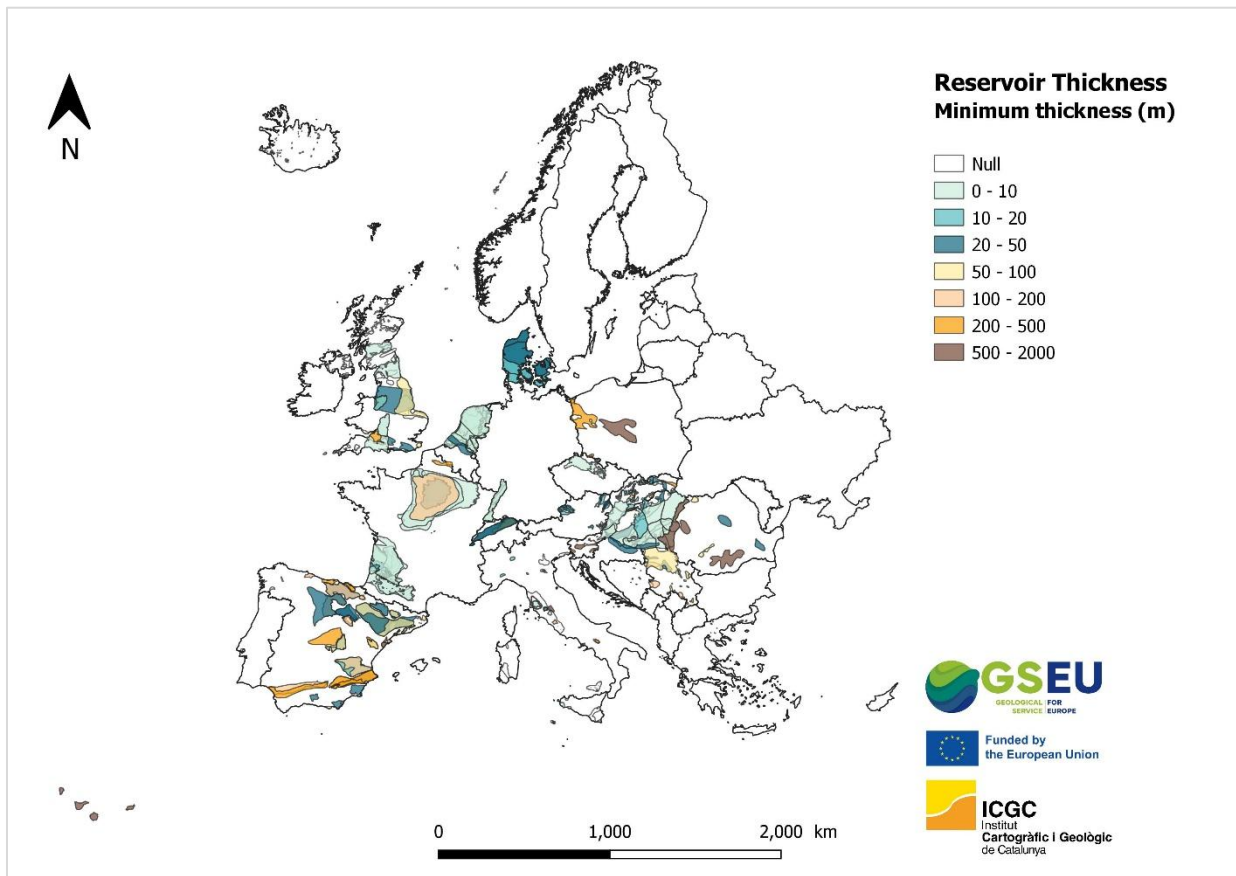


Figure 19: Potential Geothermal Reservoirs' visualization and distribution histogram for the reservoir minimum thickness (m) attribute in the Atlas.

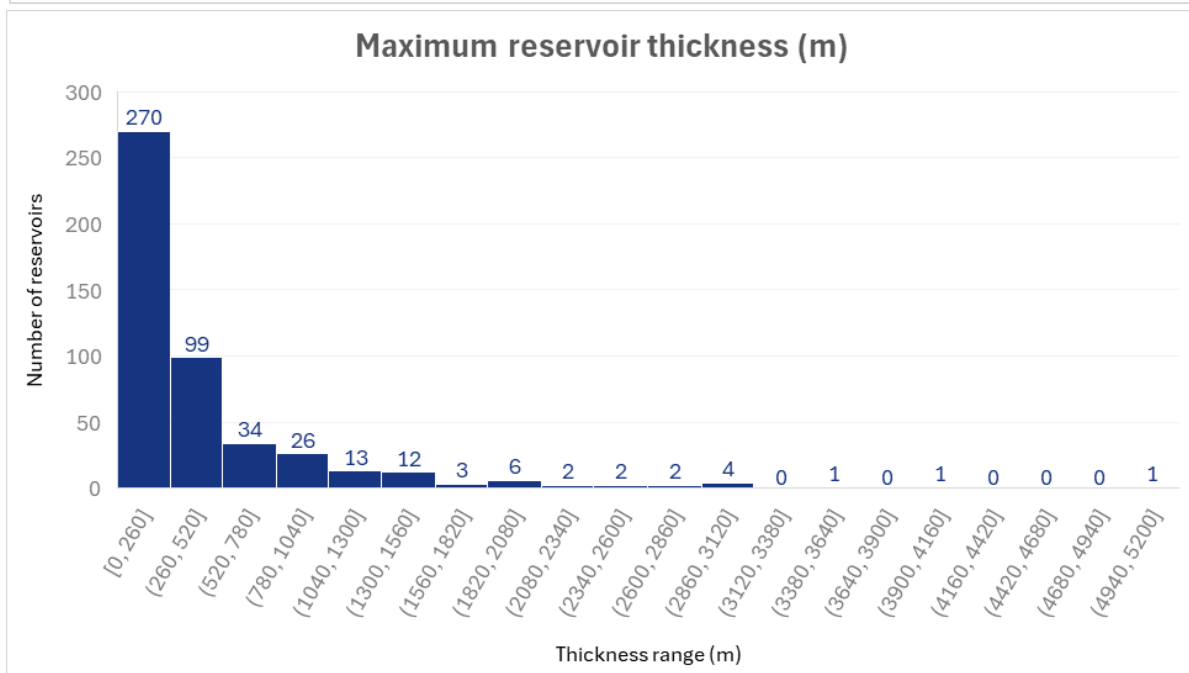
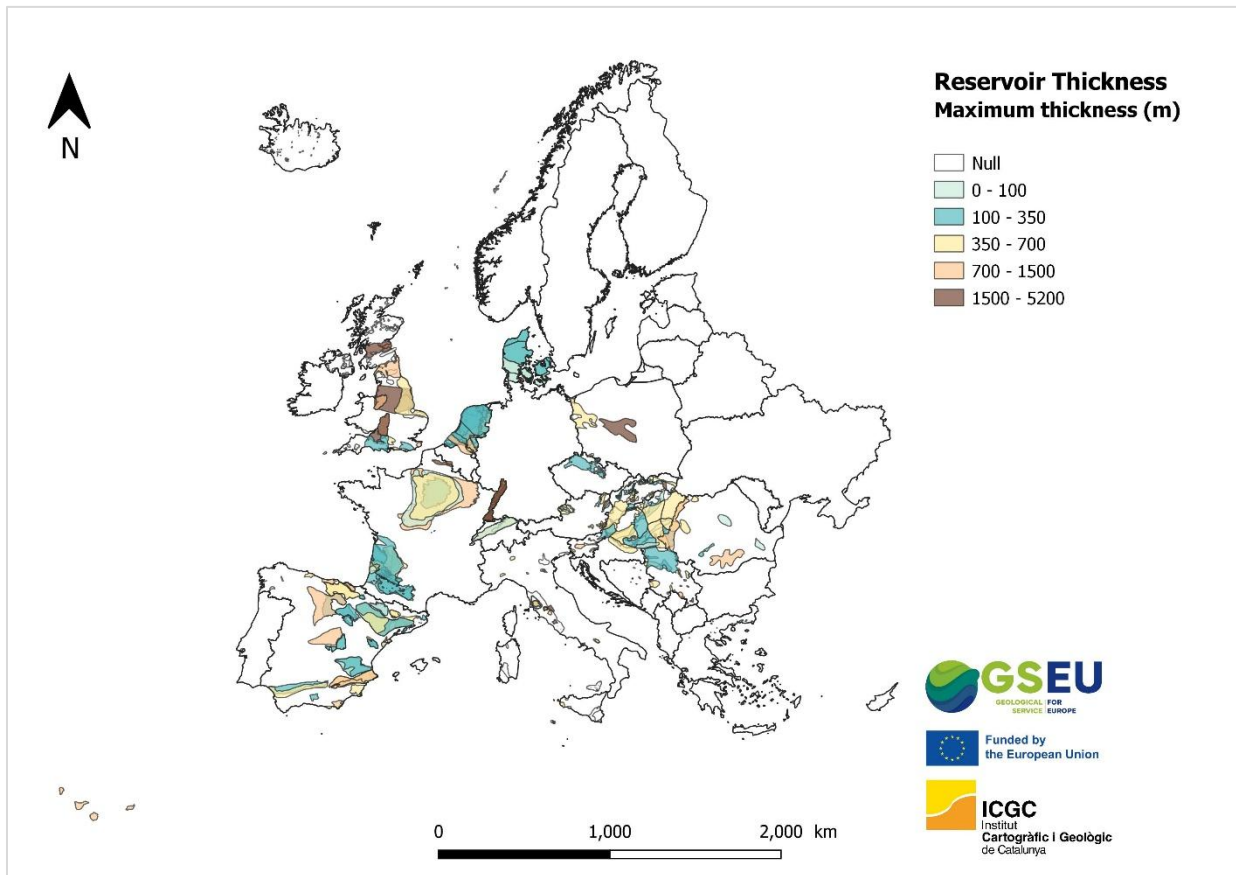


Figure 20: Potential Geothermal Reservoirs' visualization and distribution histogram for the reservoir maximum thickness (m) attribute in the Atlas.

Pan-EU Atlas of Sustainable Geo-Energy Capacities
Map of global scale potential reservoirs for geothermal exploitation and MT/HT-ATES (Level 02)
 Catalog of potential reservoirs and current geothermal fields


Geothermal play name: Maestrazgo-1		Geothermal play code: ES52_CD1_036	
Reservoir name: Maestrazgo-1_Buntsandstein		Reservoir code: ES52_CD1_036_P001	
Geologic context	Intracratonic-Rift basins	Youngest geological age	Triassic
Geologic habitat	Hydrothermal circulation	Oldest geological age	Triassic
Lithology	Sedimentary clastic	Thickness (mean)	130 m
		Temperature (max.)	76 °C
		Top Depth	2782 m b.g.l.
		Porosity	0.12 [-]

The Pan-EU Atlas of Sustainable Geo-Energy Capacities focuses on geothermal energy and geological storage (Carbon Capture and Storage, hydrogen, heat, cold) topics. To assess the deep geothermal potential, it employs a "Levels of Knowledge" approach, providing a gradual and in-depth understanding of geothermal resources following the play-based exploration geothermal pyramid concept (Moekk et al., 2020). Level 00 offers raw data on boreholes, wells, and thermal springs. Level 01 features the "Map of Favourable Areas for Deep Geothermal Prospecting" providing the "Catalog of Geothermal Play Types across the EU"—geosystems or regions with potential — guiding decision-making for further exploration and resource allocation. Level 02 assesses the geothermal reservoir potential within each Favourable Area at the regional scale, while Level 03 delivers detailed 2D/3D assessments at the prospect level.

Location maps



Reservoir and prospective areas delimitation map

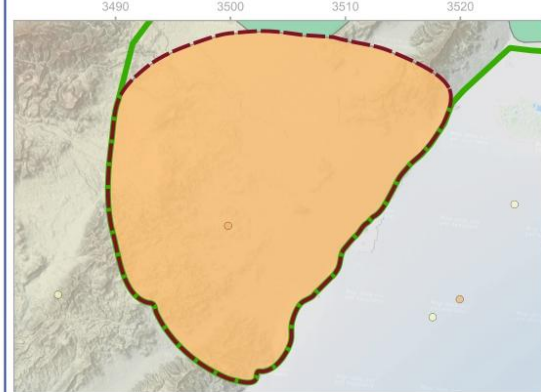

Reservoir delimitation and geology map



EMODnet Bathymetry World Base Layer version 1. GGS Geo Consultancy (2021): EMODnet Bathymetry consortium

EPSG:3035 - ETRS89-extended / LAEA Europe (in Km)
 1:5M International Geological Map of Europe and Adjacent Areas (IGME 5000)

<p>Lithology of reservoirs:</p> <ul style="list-style-type: none"> Crystalline rock Metamorphic Sedimentary carbonate Sedimentary clastic Volcanic <p>Catalog of Geothermal Play Types defined by Moekk, I.S. (2014):</p> <ul style="list-style-type: none"> CD1 Intracratonic/Rift basin CD2a Foreland basin CD2b Adjacent orogenic belt CD3 Crystalline rock/Basement CV1a Magmatic extrusive CV1b Magmatic intrusive CV2a Active volcanism CV2b Inactive volcanism CV3 Extensional domain 	<p>Boreholes depth (m)</p> <ul style="list-style-type: none"> No Data 0 - 500 500 - 2000 2000 - 5000 > 5000 <p>Thermal springs temperature (°C)</p> <ul style="list-style-type: none"> No Data < 10 10 - 20 20 - 30 30 - 40 40 - 50 50 - 60 60 - 70 70 - 80 80 - 90 90 - 100 	<p>Geothermal reservoir</p> <ul style="list-style-type: none"> Boundary or structure line Fault, inferred Fault, inferred Fold belt Geological boundary Geological boundary, inferred Gravity fault Impact structure Strike/slip fault Strike/slip fault dextral Strike/slip fault sinistral Strike/slip fault, inferred Thrust Thrust, inferred Transform fault Transform fault, inferred 	<p>Lithology</p> <table border="0"> <tr> <td> <p>Sedimentary rocks</p> <p>Cenozoic</p> <ul style="list-style-type: none"> Q Quaternary K2 Pliocene N1 Miocene K Neogene O3 Oligocene E2 Eocene E1 Palaeocene P Palaeogene C2 Cenozoic <p>Precambrian</p> <ul style="list-style-type: none"> NP Neoproterozoic MP Mesoproterozoic PP Palaeoproterozoic Pr Proterozoic Ar Archaean Ps Precambrian </td> <td> <p>Mesozoic</p> <ul style="list-style-type: none"> K2 Late Cretaceous K1 Early Cretaceous K Creaceous J2 Late Jurassic J2 Middle Jurassic J1 Early Jurassic J Jurassic T2 late Triassic T2 Middle Triassic T1 Early Triassic T Triassic M2 Mesozoic </td> <td> <p>Palaeozoic</p> <ul style="list-style-type: none"> P2 Late Permian P1-2 Early-Middle Permian P Permian C2 Late Carboniferous C1 Early Carboniferous C Carboniferous D3 Late Devonian D2 Middle Devonian D1 Early Devonian D Devonian S4-4 Late Silurian S3-3 Early Silurian S Silurian </td> <td> <p>Igneous rocks</p> <p>Intrusive</p> <ul style="list-style-type: none"> Cenozoic Mesozoic Palaeozoic Precambrian <p>Extrusive</p> <ul style="list-style-type: none"> Quaternary/Palaeogene-Pliocene Mesozoic Palaeozoic Precambrian </td> </tr> </table>	<p>Sedimentary rocks</p> <p>Cenozoic</p> <ul style="list-style-type: none"> Q Quaternary K2 Pliocene N1 Miocene K Neogene O3 Oligocene E2 Eocene E1 Palaeocene P Palaeogene C2 Cenozoic <p>Precambrian</p> <ul style="list-style-type: none"> NP Neoproterozoic MP Mesoproterozoic PP Palaeoproterozoic Pr Proterozoic Ar Archaean Ps Precambrian 	<p>Mesozoic</p> <ul style="list-style-type: none"> K2 Late Cretaceous K1 Early Cretaceous K Creaceous J2 Late Jurassic J2 Middle Jurassic J1 Early Jurassic J Jurassic T2 late Triassic T2 Middle Triassic T1 Early Triassic T Triassic M2 Mesozoic 	<p>Palaeozoic</p> <ul style="list-style-type: none"> P2 Late Permian P1-2 Early-Middle Permian P Permian C2 Late Carboniferous C1 Early Carboniferous C Carboniferous D3 Late Devonian D2 Middle Devonian D1 Early Devonian D Devonian S4-4 Late Silurian S3-3 Early Silurian S Silurian 	<p>Igneous rocks</p> <p>Intrusive</p> <ul style="list-style-type: none"> Cenozoic Mesozoic Palaeozoic Precambrian <p>Extrusive</p> <ul style="list-style-type: none"> Quaternary/Palaeogene-Pliocene Mesozoic Palaeozoic Precambrian 	<p>Metamorphic rocks</p> <p>Metamorphic grade</p> <ul style="list-style-type: none"> Low-grade Medium-grade High-grade Undifferentiated
<p>Sedimentary rocks</p> <p>Cenozoic</p> <ul style="list-style-type: none"> Q Quaternary K2 Pliocene N1 Miocene K Neogene O3 Oligocene E2 Eocene E1 Palaeocene P Palaeogene C2 Cenozoic <p>Precambrian</p> <ul style="list-style-type: none"> NP Neoproterozoic MP Mesoproterozoic PP Palaeoproterozoic Pr Proterozoic Ar Archaean Ps Precambrian 	<p>Mesozoic</p> <ul style="list-style-type: none"> K2 Late Cretaceous K1 Early Cretaceous K Creaceous J2 Late Jurassic J2 Middle Jurassic J1 Early Jurassic J Jurassic T2 late Triassic T2 Middle Triassic T1 Early Triassic T Triassic M2 Mesozoic 	<p>Palaeozoic</p> <ul style="list-style-type: none"> P2 Late Permian P1-2 Early-Middle Permian P Permian C2 Late Carboniferous C1 Early Carboniferous C Carboniferous D3 Late Devonian D2 Middle Devonian D1 Early Devonian D Devonian S4-4 Late Silurian S3-3 Early Silurian S Silurian 	<p>Igneous rocks</p> <p>Intrusive</p> <ul style="list-style-type: none"> Cenozoic Mesozoic Palaeozoic Precambrian <p>Extrusive</p> <ul style="list-style-type: none"> Quaternary/Palaeogene-Pliocene Mesozoic Palaeozoic Precambrian 					

Description

The CD1 Maestrazgo-1 subsiding basin, located within an intracratonic domain of the Valencian region, demonstrates significant potential for hosting hydrothermal reservoirs within both clastic and carbonate lithologies. The porosity and permeability of these sedimentary aquifers are largely influenced by the spatial distribution of lithofacies.

Positioned in the northeastern Iberian Peninsula, approximately 34 km southwest of the Ebro River Delta, the basin is characterized as a NE-SW-oriented synclinorium. It is intersected by numerous sub-vertical normal faults that extend through the entire stratigraphic sequence, also trending NE-SW.

The stratigraphy comprises Triassic formations overlying a Palaeozoic basement, including Buntsandstein siliciclastic deposits and Muschelkalk dolomites. The Muschelkalk is subdivided into three units (M1 to M3), with the basal (M1) and upper (M3) units being dolomitic, and the intermediate unit (M2) consisting of evaporitic and shaly materials. The M2 unit appears to have accommodated ductile deformation at depth, resulting in variable thickness across the basin. Unlike typical Triassic successions that include Keuper facies, in this basin the Keuper is either absent or present only as a thin layer. Consequently, Jurassic to Cretaceous carbonate-marl sequences may directly overlie the M3 unit.

Only one well, Maestrazgo-1, is documented in the IGME database for this area. Notably, this well does not encounter thick dolomitic Muschelkalk intervals. The thermal gradient calculated for this well is approximately 21 °C/km, though this value is likely underestimated. The well is located near the synclinorium axis, and thus the formation data reflect this specific structural position.

Buntsandstein sandstones were encountered at a depth of 2.782 m b.g.l., with a thickness of 72 m. However, nearby data from the Salsadella-1

Geothermal play name: Maestrazgo-1	Geothermal play code: ES52_CD1_036
Reservoir name: Maestrazgo-1_Buntsandstein	Reservoir code: ES52_CD1_036_P001

Description
 well suggest that this unit may reach 140–188 m in thickness. Based on the estimated thermal gradient, the temperature at this depth is approximately 76 °C. Although no salinity data are available, the formation water is presumed to be hypersaline. Reported porosity values in the near Salsadella-1 well are around 12 %.

Assessment of the Heat In Place (HIP)

The estimation of the deep origin geothermal potential for the Level 02 of the GSEU Project, has been assessed according to the volumetric method Heat-In-Place (HIP) proposed by Muffler and Cataldi (1978). It estimates the thermal energy contained in both, the rock and the fluid volumes of the reservoirs. The HIP evaluation of the whole reservoir results from the 1D aggregated stochastic calculation by using the tool written in Python "1D-HIP-HSP-Calculator", specifically tailored for this project. It is based on the tool proposed by Hu et al. (2022), which includes a graphical user interface, distribution models for input parameters and output figures.

$$HIP [PJ] = V \cdot [\rho \cdot F \cdot C \cdot F + (1 - \phi) \cdot \rho \cdot R \cdot C \cdot R] \cdot (T_r - T_i)$$

V : representative volume [m³] = A (area) × b (thickness); φ : representative porosity [dimensionless]; ρF : fluid density [kg/m³]; CF : specific heat capacity of the fluid [kJ/kg·°C]; ρR : rock density [kg/m³]; CR : specific heat capacity of the rock [kJ/kg·°C]; Tr : temperature of the reservoir [°C]; Ti : reference temperature [°C].

Assessment of the Heat Storage Potential (HSP)

The estimation of the Heat Storage Potential for the Level 02 of the GSEU Project, has been assessed for conventional reservoirs considered as aquifers. Aquifer Thermal Energy Storage (ATES) aims to artificially and thermally stimulate geological formations, and/or water contained on it, by injecting hot waters and extracting it afterwards in a wide range of depth. In a cyclical way, the excess heat can be stored and re-used when seasonal based necessities require it. Classical geological formations exploited for this purpose are natural underground water-permeable layers, porous and/or fractured rocks. For the GSEU Project the reference temperatures considered are 60 and 90 °C, in a medium to high temperature range. The HSP has been assessed according to the method proposed by Frick et al. (2022), which considers the effective reservoir volume to be the half of the total volume of the reservoir. And two key parameters related to the exploitation procedure, the recovery factor (Fr) and the packing correction factor (Fp).

$$HSP [PJ] = (0.5 \cdot V) \cdot [\rho \cdot F \cdot C \cdot F + (1 - \phi) \cdot \rho \cdot R \cdot C \cdot R] \cdot (T_r - T_i) \cdot Fr \cdot Fp$$

V : representative volume [m³] = A (area) × b (thickness); φ : representative porosity [dimensionless]; ρF : fluid density [kg/m³]; CF : specific heat capacity of the fluid [kJ/kg·°C]; ρR : rock density [kg/m³]; CR : specific heat capacity of the rock [kJ/kg·°C]; Tr : temperature of the reservoir [°C]; Ti : reference temperature [°C]; Fr : Recovery factor; Fp : Packing correction factor.

Results


A histogram and a cumulative distribution function provide the graphical results of the calculations (cf. figures). The range of numeric values considered, and the results obtained from the calculations are shown using the statistical metrics P10-1, P50-1, and P90-1, and considering absolute values for the entire reservoir, expressed in PJ (Petajoules), where:

- P10⁻¹ (Optimistic)** : There is a 10% probability that the actual amount of stored heat will be greater than this value. It represents a high-value estimate;
- P50⁻¹ (Median)** : There is a 50% probability that the actual amount of stored heat will be greater than this value. This is considered the most likely estimate;
- P90⁻¹ (Conservative)** : There is a 90% probability that the actual amount of stored heat will be greater than this value. This is a low-value estimate, reflecting a conservative scenario.

Heat In Place Results (PJ)

P10: 16600
P50: 11000
P90: 6190


ES52_CD1_036_P001_HIP

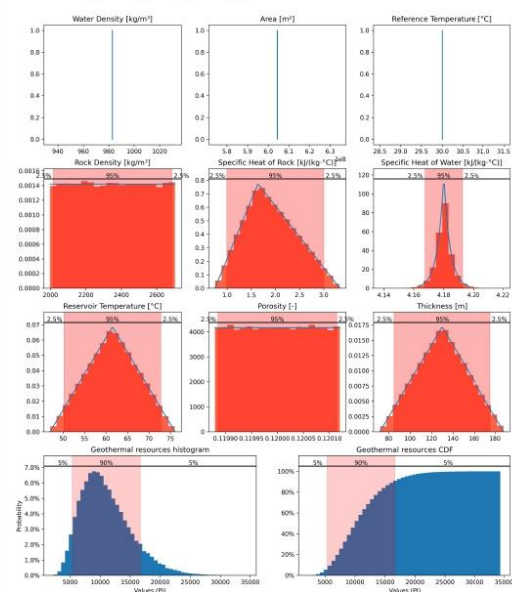

Heat Storage Potential Results (PJ)

P10: 4260
P50: 2780
P90: 1530

ES52_CD1_036_P001_HSP

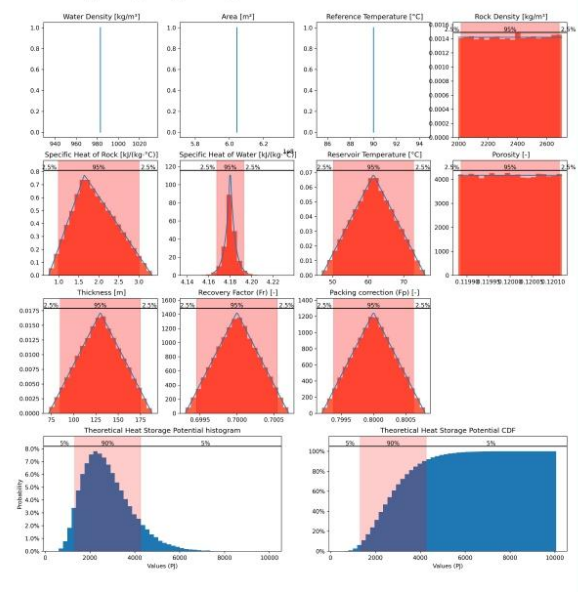



Pan-EU Atlas of Sustainable Geo-Energy Capacities
Map of global scale potential reservoirs for geothermal exploitation and MT/HT-ATES (Level 02)
Catalog of potential reservoirs and current geothermal fields

Geothermal play name: Maestrazgo-1		Geothermal play code: ES52_CD1_036	
Reservoir name: Maestrazgo-1_Buntsandstein		Reservoir code: ES52_CD1_036_P001	

Values for the HIP assessment

Reservoir	ES52_CD1_036_P001				
Target	Maestrazgo-1_Buntsandstein				
Input values of HIP calculation					
Water Density [kg/m ³]	983	983	983	Constant	Inferred
Area [m ²]	604445313	604445313	604445313	Constant	Measured
Reference Temperature [°C]	30	30	30	Constant	Inferred
Rock Density [kg/m ³]	2000	2350	2700	Uniform	Inferred
Specific Heat of Rock [kJ/(kg·°C)]	0.75	1.64	3.33	Triangular	Inferred
Specific Heat of Water [kJ/(kg·°C)]	4.18	4.18	4.18	Laplace	Measured
Reservoir Temperature [°C]	47	61.5	76	Triangular	Inferred
Porosity [-]	0.12	0.12	0.12	Uniform	Inferred
Thickness [m]	72	130	188	Triangular	Measured

Values for the HSP assessment

Reservoir	ES52_CD1_036_P001				
Target	Maestrazgo-1_Buntsandstein				
Input values of HSP calculation					
Water Density [kg/m ³]	983	983	983	Constant	Inferred
Area [m ²]	604445313	604445313	604445313	Constant	Measured
Reference Temperature [°C]	90	90	90	Constant	Inferred
Rock Density [kg/m ³]	2000	2350	2700	Uniform	Inferred
Specific Heat of Rock [kJ/(kg·°C)]	0.75	1.64	3.33	Triangular	Inferred
Specific Heat of Water [kJ/(kg·°C)]	4.18	4.18	4.18	Laplace	Inferred
Reservoir Temperature [°C]	47	61.5	76	Triangular	Inferred
Porosity [-]	0.12	0.12	0.12	Uniform	Inferred
Thickness [m]	72	130	188	Triangular	Measured
Recovery Factor (Fr) [-]	0.7	0.7	0.7	Triangular	Inferred
Packing correction (Fp) [-]	0.8	0.8	0.8	Triangular	Inferred

References

Moeck, I. S. (2014). Catalog of geothermal play types based on geologic controls. *Renewable and Sustainable Energy Reviews*, 37, 867-940
<https://doi.org/10.1016/j.rser.2014.05.090>.

Muffler, P. ; Cataldi, R. (1978). Methods for regional assessment of geothermal resources. *Geothermics*, 7, 53-89. [https://doi.org/10.1016/0375-6505\(78\)90002-58](https://doi.org/10.1016/0375-6505(78)90002-58).

Atlas of subsoil structures susceptible to Geological Storage of CO2 in Spain. IGME. 2012. Algeco2 - InfoIGME

Study of the possibilities of geothermal energy exploration in deep low and medium enthalpy warehouses in the national territory, IGME 1981.
<https://info.igme.es/ConsultaSID/presentacion.asp?id=19508>.

Hydrocarbon exploration database- IGME <https://info.igme.es/infogeof/>.

Disclaimer

The outlined reservoirs and the original data used in the assessments may come from direct measurements, calculated estimates, or values inferred from nearby projects and/or theoretical references found in the literature. This layer integrates varying levels of data reliability, and the inclusion or exclusion of reservoirs is guided by the expert judgement of each country's scientific committee from the geological surveys contributing to the GSEU Project. Due to variations in data availability and national capacities, some countries were unable to provide reservoir information or to carry out the assessment of HIP and/or HSP. Results should therefore be interpreted with these considerations in mind. Expected future contributions may improve the current values for the calculations and increase the coverage of the territory.

More Information



Contact

<https://www.geologicalservice.eu/>

<https://www.europe-geology.eu/>

ignasi.herms@icgc.cat







The Geological Surveys of Europe



101075609 — GSEU — HORIZON-CL5-2021-D3-02 GSEU - Catalog of Potential Reservoirs v1.0 - March, 2026

Figure 21: Example of a Factsheet from a potential natural deep reservoir in Spain.

4.5.1. Lumped and stochastic Heat In Place (HIP) assessment

The aim of this chapter is to explain what is and how the Heat-In-Place (HIP) was assessed for each geothermal reservoir. The HIP refers to the total amount of heat stored into a specific volume of rock, even if it is dry or saturated with fluid. Muffler and Cataldi (1978) proposed the volumetric method to estimate the heat store potential in a specific reservoir and involves the calculation of the thermal energy contained in each volume of rock and fluid. It is assessed by using the following formula:

$$HIP = V \cdot [\phi \cdot \rho_F \cdot C_F + (1 - \phi) \cdot \rho_R \cdot C_R] \cdot (T_r - T_i)$$

where:

- V is the representative or voxel volume [m³] = A (area) * b (thickness)
- ϕ is the representative porosity [parts per unit]
- ρ is the representative density [kg/m³], where R - rock, and F - fluid
- C is the representative specific heat capacity [kJ/kg·°C], where R - rock, and F - fluid
- T_r is the representative reservoir temperature [°C]
- T_i is the reference temperature [°C]

The calculation was performed by using a 1D lumped stochastic Monte Carlo simulations through a Python-based tool specifically customised, from "Geothermo Tool (Hu et al., 2022)", for this project. It aims to create a model of multiple possible outcomes by taking advantage of the probability distribution functions (PDFs) for any variable with inherent uncertainty. It then recalculates the results repeatedly, each time using a different set of random numbers in the given range of values for each variable. Five different PDFs are included in the Tool: constant, uniform, triangular, normal or Gaussian, and Laplace. The value that will be considered as representative for the heat stored in a reservoir is the median (or P50) of the values distribution, which means the probability of that 50% of the values are contained in the first half of the calculation results. To be able to compare the potential of all reservoirs provided to this project the reference temperature (T_i) was fixed at 30 °C.

4.5.2. Lumped and stochastic theoretical Heat Storage Potential (HSP) assessment

The aim of this chapter is to explain how the theoretical Heat Storage Potential was assessed for each aquifer with this purpose. Aquifer Thermal Energy Storage (ATES) aims to artificially and thermally stimulate geological formations, and/or the water contained on it, by injecting hot waters and afterwards extracting it, in a wide range of depth. In a cyclical way, the excess heat can be stored and re-used when seasonal based necessities require it. This technology presents high levels of efficiency and is favourable for large-scale energy storage on a seasonal basis. The geological formations exploited for this purpose are natural underground water-permeable layers (aquifers) usually conformed by unconsolidated sediments (e.g. sand units), porous rocks (e.g. sandstones, limestones), or fractured rock formations. Be aware that formations with very coarse sand are not favourable reservoirs for storing heat due to buoyancy flow, which decreases the efficiency.

Long-term profitability, large storage potential and low operational costs are the main benefits from using ATES systems in Medium-Temperature (MT-ATES) in a range of 30-60 °C or High-Temperature (HT-ATES) in a range of 60-90 °C. MT-ATES is just dedicated to shallow-medium deep aquifer units (upper few hundred meters below surface level), while HT-ATES is inferred from shallow to deeper water-bearing units. The natural temperature of the aquifer is the main constraint for potential reservoirs to storage Medium-Temperature. If it exists a natural reservoir at 50 °C, it will not be able to store temperatures below that value. Be aware that severe restrictions in most of the countries oblige to inject water at few tens of degrees Celsius. Two examples of HT-ATES systems operating in Germany storing hot water at 60 °C in a depth of 300 m (German Reichstag building) and storing hot water at 80 °C in a depth of 1250 m (Neubrandenburg plant). There is an example of under construction plant (BMW facility in Dingolfing) with planned storage of very hot water at 130 °C in a depth range of 500-700 m (*Kallesøe, A.J. & Vangkilde-Pedersen, T. (eds). 2019: Underground Thermal Energy Storage (UTES) – state-of-the-art, example cases and lessons learned. HEATSTORE project report, GEOTHERMICA – ERA NET Cofund Geothermal. 130 pp + appendices*) with energy supplies starting not later than the second quarter of 2025.

Experiences from previous EU projects (such as ESTMAP or Heatstore) and current examples of operating systems lead to conclude that MT-ATES systems offer a few added technical benefits in front of HT-ATES in what respects to the lesser density-driven groundwater flows, no needs of high temperature resistant materials to be used and no water treatment is required. Otherwise, higher amounts of water volume are required for the same heating power, as well as higher flow rates. Its applicability is being reduced due to original lower temperature values.

The geological and hydrological conditions are the key parameters for considering the utilization and implementation of ATES systems, and those are the ones that will be followed to decide whether a reservoir is suitable or not to store thermal energy:

- 1) Natural aquifers (non-enhanced): natural porous/fractured media will be considered.
- 2) Enough permeability to inject fluid and store energy on it but not high enough to provoke high groundwater flow velocities around the storage to dissipate and loss the heat.
- 3) Confining low permeability layers: low permeable layers confining the porous media.
- 4) Low thermal conductivity layers bounding the aquifer: confining levels may be thermally poorly conductive.
- 5) Restricted groundwater through-flow velocity: no existence of elevated groundwater flow permanently cooling the potential reservoir.
- 6) Favourable chemistry (non-chemically enriched waters): to avoid scaling in wells and pipes, and the weathering of the geological formation.

4.5.2.1. HSP calculations

The main parameters required for the estimation of the theoretical Heat Storage Potential (HSP) are the reservoir volume, the reservoir temperature, the reservoir volumetric heat capacity, and the reference temperature. In that case, and according to Frick et al. (2022), the effective reservoir volume for the storage potential may be assumed to be half the total since the heat storage side of the system will be considered. Two additional factors take part into this calculation:

- 1) Recovery Factor (F_r): A typical key performance indicator showing the recovery efficiency of underground thermal energy storage over the whole charge and discharge cycles (normally referred to one year). It is defined by the annually discharged and charged energy. Since we want to provide a conservative estimate comparable elsewhere, a value of ~70% will be fixed.
- 2) Packing Correction Factor (F_p): Is derived by circle packing density. For uniform circles, the highest packing density would be ~90% when arranging them hexagonally. Since we consider a regular grid and want to provide a conservative estimate comparable elsewhere, the squared variant of circular packing that represents a density of ~80% will be fixed.

$$HSP = (0.5 \cdot V) \cdot [\emptyset \cdot \rho_F \cdot C_F + (1 - \emptyset) \cdot \rho_R \cdot C_R] \cdot (T_r - T_i) \cdot F_r \cdot F_p$$

where:

- V is the representative or voxel volume [m^3] = A (area) * b (thickness)
- \emptyset is the representative porosity [parts per unit]
- ρ is the representative density [kg/m^3], where R - rock, and F - fluid
- C is the representative specific heat capacity [$kJ/kg \cdot ^\circ C$], where R - rock, and F - fluid
- T_r is the representative reservoir temperature [$^\circ C$]
- T_i is the reference temperature [$^\circ C$]
- F_r is the recovery factor [parts per unit] (0.7)
- F_p is the packing correction factor [parts per unit] (0.8)

The assessment of the HSP was performed by using the same tool described in the previous section referred to the HIP assessment. The value considered as representative for the heat stored in a reservoir is the median (or P50) of the values distribution, which means the probability of that 50% of the values are contained in the first half of the calculation results. The reference temperature for the theoretical Heat Storage Potential was set at 60 °C and/or 90 °C, according to the maximum temperature value of the reservoir in which heat may be stored.

5. References

- Akhurst, M., Kirk, K., Neele, F., Grimstad, A.-A., Bentham, M., Bergmo, P. (2021) Storage Readiness Levels: communicating the maturity of site technical understanding, permitting and planning needed for storage operations using CO₂. *International Journal of Greenhouse Gas Control*, <https://doi.org/10.1016/j.ijggc.2021.103402>
- Bachu, S. (2008). Comparison between methodologies recommended for estimation of CO₂ storage capacity in geological media (CSLF-T-2008-04). Carbon Sequestration Leadership Forum (CSLF), Technical Group (TG). <https://fossil.energy.gov/archives/cslf/sites/default/files/documents/PhaseIIIReportStorageCapacityEstimationTaskForce0408.pdf>
- DARLINGe Interreg Project (2017) (Danube Region Leading Geothermal Energy). D.3.1.1.-e-learning part II. Basic concepts of deep geothermal energy. <https://dtp.interreg-danube.eu/approved-projects/darlinge/outputs>
- European Commission. (2024, February 2). Communication from the commission to the European Parliament, the Council, the European Economic and Social Committee and the Committee of the Regions. Towards an ambitious Industrial Carbon Management for the EU. (COM/2024/62 final). <https://eur-lex.europa.eu/legal-content/EN/TXT/PDF/?uri=CELEX:52024DC0062>
- Frailey, S., 2007. In: United States Department of Energy, National Energy Technology Laboratory, “Carbon Sequestration Atlas of the United States and Canada”, March 2007. Methodology for Development of Carbon Sequestration Capacity Estimates. Appendix A. 90 pp.
- Frick, M., Kranz, S., Norden, B., Bruhn, D. & Fuchs, S. (2022). Geothermal Resources and ATES Potential of Mesozoic Reservoirs in the North German Basin. *Energies*, 15 (6). 1980. <https://doi.org/10.3390/en15061980>
- Hu, J., Tian, Y., Li, Z., Jiang, G., Zuo, Y., Zhang, C., Wang, Y., Wang, Y. & Hu, S. (2022). GeothermoTool: An open-source software for basic geothermal calculations and plots. *Geothermics*, 106, 102551. <https://doi.org/10.1016/j.geothermics.2022.102551>
- International Association of Drilling Contractors. (2025). *IADC geothermal well classification* (Issue 1.0). IADC Geothermal Committee. <https://iadc.org/wp-content/uploads/2025/02/IADC-Geothermal-Well-Classification-v1.pdf>
- Moeck, I. (2014). Catalog of geothermal play types based on geologic controls. *Renewable and Sustainable Energy Reviews*, 37, 867-882. <https://doi.org/10.1016/j.rser.2014.05.032>
- Moeck, I. & Beardsmore, G. (2014). A new “geothermal play type” catalog: Streamlining exploration decision making. Thirty-Ninth Workshop on Geothermal Reservoir Engineering. Stanford University, Stanford, California. SGP-TR-202.



Moeck, I., Bendall, B., Minnig, C., Manzella, A., & Yasukawa, K. (2020). Geothermal Play Typing – Current Development and Future Trends of a Modern Concept for Geothermal Resources Assessment. *Proceedings World Geothermal Congress 2020*, Reykjavik, Iceland, April 26 – May 2, 2020. <https://pangea.stanford.edu/ERE/db/WGC/papers/WGC/2020/16074.pdf>

Moeck I.S., Dussel M, Weber J, Schintgen T, and Wolfgramm M. (2019). Geothermal play typing in Germany, case study Molasse Basin: a modern concept to categories geothermal resources related to crustal permeability. *Netherlands Journal of Geosciences*, Volume 98, e14. <https://doi.org/10.1017/njg.2019.12>

Muffler, L. J. P. & Cataldi, R. (1978). Methods for Regional Assessment of Geothermal Resources. *Geothermics*, 7, 53-89. [https://dx.doi.org/10.1016/0375-6505\(78\)90002-0](https://dx.doi.org/10.1016/0375-6505(78)90002-0)

Society of Petroleum Engineers (SPE). (2017). CO2 Storage Resources Management System. Retrieved from <https://www.spe.org/industry/docs/SRMS.pdf>

Schuppers, & Holloway, & May, Franz & Gerling, & Bøe, Reidulv & Magnus, & Riis, & Osmundsen, & Larsen, & Andersen, & Hatzlyannis, G. (2003). Storage capacity and quality of hydrocarbon structures in the North Sea and Aegan region.

6. Annex

WP3 consortium partners			
ID	Partner Name	Acronym	Country
2	Nederlandse Organisatie voor Toegepast Natuurwetenschappelijk Onderzoek	TNO	Netherlands
3	Sherbimi Gjeologjik Shqiptar	AGS	Albania
5	Bureau de Recherches Géologiques et Minières	BRGM	France
6	British Geological Survey	BGS	UK
7	Ministry for Finance and Employment	MFE	Malta
8	Hrvatski Geološki Institut Croatian Geological Survey	HGI-CGS	Croatia
9	Institut Royal des Sciences Naturelles de Belgique	RBINS-GSB	Belgium
10	Państwowy Instytut Geologiczny – Państwowy Instytut Badawczy	PGI-NRI	Poland
11	Institut Cartogràfic i Geològic de Catalunya	ICGC	Spain
12	Česká Geologická Služba	CGS	Czechia
13	Department of Environment, Climate and Communications - Geological Survey Ireland	GSI	Ireland
14	Agencia Estatal Consejo Superior de Investigaciones Científicas. Instituto Geológico y Minero de España	CSIC-IGME	Spain
15	Bundesanstalt für Geowissenschaften und Rohstoffe	BGR	Germany
16	Geološki zavod Slovenije	GeoZS	Slovenia
18	Federalni Zavod za Geologiju Sarajevo	FZZG	Bosnia and Herzegovina
19	Istituto Superiore per la Protezione e la Ricerca Ambientale	ISPRA	Italy

20	Regione Umbria	RU	Italy
22	Institute of Geological Sciences National Academy of Sciences of Ukraine	IGS	Ukraine
24	Ukrainian Association of Geologists	UAG	Ukraine
26	Geological Survey of Serbia	GZS	Serbia
27	Ministry of Agriculture, Rural Development and Environment of Cyprus	GSD	Cyprus
28	Norges Geologiske Undersøkelse	NGU	Norway
30	Sveriges Geologiska Undersökning	SGU	Sweden
31	Geological Survey of Denmark and Greenland	GEUS	Denmark
33	Magyar Bányászati és Földtani Szolgálat	MBFSZ	Hungary
34	Office fédéral de topographie	SWISSTOPO	Switzerland
35	Elliniki Archi Geologikon kai Metalleftikon Erevnon	HSGME	Greece
36	Laboratório Nacional de Energia e Geologia I.P.	LNEG	Portugal
37	Lietuvos Geologijos Tarnyba prie Aplinkos Ministerijos	LGT	Lithuania
38	GeoSphere Austria (previous Geologische Bundesanstalt)	GSA (previous GBA)	Austria
39	Service Géologique de Luxembourg	SGL	Luxembourg
43	Štátny Geologický ústav Dionýza Štúra	SGUDS	Slovakia
46	Íslenskar Orkurannsóknir	ISOR	Iceland
-	Geological Survey of the Republic of North Macedonia	GSNM	North-Macedonia