

SUMMARIZING THE IMPACTS OF FUTURE POTENTIAL GLOBAL CHANGE SCENARIOS ON
SEAWATER INTRUSION AT THE AQUIFER SCALE

LETICIA BAENA-RUIZ^(1,*), DAVID PULIDO-VELAZQUEZ⁽¹⁾, ANTONIO-JUAN COLLADOS-
LARA⁽¹⁾, ARIANNA RENAUPRUÑONOSA⁽²⁾, IGNACIO MORELL⁽²⁾, JAVIER SENENT-
APARICIO⁽³⁾, CARLOS LLOPIS-ALBERT⁽⁴⁾

¹ IGME, Granada, Spain

² IGME and UCAM, Granada, Spain

³ Jaume I University, Castellón, Spain

⁴ Catholic University of Murcia, Murcia, Spain

⁵ Universitat Politècnica de València, Valencia, Spain

Leticia Baena-Ruiz: lbaenar@gmail.com

David Pulido-Velazquez: d.pulido@igme.es

Antonio-Juan Collados-Lara: ajcollados@gmail.com

Arianna Renau-Pruñonosa: arenau@uji.es

Ignacio Morell: morell@uji.es

Javier Senent-Aparicio: jsenent@ucam.edu

Carlos Llopis-Albert: cllopisa@upvnet.upv.es

* Corresponding author

Abstract

Climate change affects rainfall and temperature producing a breakdown in the water balance and a variation in the dynamic of freshwater-seawater in coastal areas, exacerbating seawater intrusion (SWI) problems. The target of this paper is to propose a method to assess and analyze impacts of future global change (GC) scenarios on SWI at aquifer scale in a coastal area. Some adaptation measures have been integrated in the definition of future GC scenarios incorporating complementary resources within the system in accordance with urban development planning. The proposed methodology summarizes the impacts of potential GC scenarios in terms of SWI status and vulnerability at aquifer scale through steady pictures (maps and conceptual 2D cross sections for specific dates or statistics of a period) and time series for lumped indices. It is applied to the Plana de Oropesa-Torreblanca aquifer. The results summarize the influence of GC scenarios in the global status and vulnerability to SWI under some management scenarios. These GC scenarios would produce higher variability of SWI status and vulnerability.

Acknowledgements This work has been partially supported by the GeoE.171.008-TACTIC project from GeoERA organization funded by European Union's Horizon 2020 research and innovation program and the Plan de Garantía Juvenil from MINECO (Ministerio de Economía y Competitividad), co-financing by BEI (Banco Europeo de Inversiones) and FSE (Fondo Social Europeo). The authors also thank AEMET and UC for the data provided for this work (Spain02 dataset, <http://www.meteo.unican.es/datasets/spain02>).

Keywords: global change impacts, adaptation measures, seawater intrusion; status and vulnerability, coastal aquifer; lumped index.

1 Introduction

It is a fact that climate change (CC) would imply a variation in the patterns of temperature and precipitation in the future. In general, in the Mediterranean area an increase in temperature and a decrease in precipitation is expected. The available potential future scenarios show higher evapotranspiration, a lower groundwater (GW) recharge and an increase of the sea level. In coastal areas the problem is exacerbated due to overexploitation, intensifying SWI. Therefore, maintaining acceptable quantity and quality characteristics of GW reserves is important to ensure demand water supply (Sola et al. 2013; Renau-Pruñonosa et al. 2016).

Many investigations have focused on sea-level rise as an important effect of GC on SWI in coastal aquifers (Werner and Simmons 2009; Ferguson and Gleeson 2012; Loáiciga et al. 2012; Benini et al. 2016), but many aquifers are more vulnerable to CC effects on GW recharge and pumping than to sea-level rise (Ferguson and Gleeson 2012; Rasmussen et al. 2013).

An increase in temperature and a decrease in precipitation will force a greater use of available water resources, especially GW. It is due to the recharge decrease and the increase in crop water requirements and, therefore, in the pumping rates. Overexploitation is the main problem in most coastal aquifers since it produces the inland penetration of the saltwater. Therefore, in order to reduce the impacts of GC on SWI, different adaptation strategies could be applied. They include measures to reduce aquifer demands such as Land Use and Land Cover (LULC) changes, modernization and adaptation of irrigation areas and/or economic instruments (Escriba-Bou et al. 2017; Grundmann et al. 2012; Robins et al. 1999). Different measures focused on the offer could be also applied to obtain complementary resources to supply demands, as for example water reuse, desalinations, water transfers and conjunctive use measures (Trinh et al. 2012; McEvoy and Wilder 2012; Pulido-Velazquez et al. 2011).

Many authors have assessed hydrological impacts of CC and/or LULC changes in the SWI phenomenon using sharp interface or density-dependent flow models to simulate hydraulic head and salinity in the aquifer (Pulido-Velazquez et al. 2018; Romanazzi et al. 2015; Klove et al. 2014; Rajan et al. 2006). Potential climate scenarios are defined by simulating future emission scenarios within physically based climatic models (General Circulation Models (GCMs) and Regional Climatic Models (RCMs). Due to the significant bias that usually appears between the historical information and the control simulation of the model, in order to make this climate information relevant for case study, we need to translate them to the regional-local scale by applying some statistical corrections (Collados-Lara et al. 2018). Distributed hydrological models are useful tools to propagate scenarios to assess impacts on hydrological variables at specific time and location. Nevertheless, they do not allow to draw direct conclusions about the impacts on

SWI (status and vulnerability) at aquifer scale. For this purpose, an approach such as an index-based method, defined from the output of the model, is a useful tool to analyse this issue. It can also help to summarize SWI problems at aquifer scale in different periods and identify aquifers in risk of not achieving good chemical status according to the Water Framework Directive (WFD 2000; CHJ 2015).

The vulnerability to contamination in coastal aquifers under future climate scenarios has been previously studied by several authors by employing different vulnerability indices. Li and Merchant (2013) employed a modified DRASTIC index to model GW vulnerability under future climate and LULC scenarios. Benini et al. (2016) used the GALDIT method to assess vulnerability in the Quinto Basin by employing some CC and LULC change scenarios in a long-term period. They did not use a flow model to simulate salinity and hydraulic head variables. Luoma et al. (2017) assess the potential impacts of CC on the vulnerability to pollution of an aquifer comparing AVI, SINTACS and GALDIT methods. Although the assessment of vulnerability under future scenarios using an index-based method has been applied by different authors (Huang et al. 2017; Koutroulis et al. 2018), none of them intend to summarise and analyse this issue at aquifer scale.

In Baena-Ruiz et al. (2018) a novel index-based method was proposed to perform an integrated assessment of the global status and vulnerability to SWI in coastal aquifers. The methodology was applied in the Plana de Oropesa-Torreblanca and Plana de Vinaroz aquifers. It was obtained from hydraulic head and chloride concentration data available in observation wells for the historical period from 1977 to 2015. In that approach, the distributed fields of variables required to define the indices were obtained by applying a simple interpolation method.

This paper intends to achieve a novel objective, to assess impacts of future GC and CC scenarios on the global status and vulnerability to SWI at aquifer scale. We propose to perform it by combining a method to summarize SWI at aquifer scale and the outputs of an integrated method to propagate impacts of GC scenarios (including adaptation strategies). It intends to contribute in the definition of methods to harmonize the assessment of GC impacts on SWI problems (status and vulnerability) at aquifer scale. It would allow to compare the significance of SWI in different historical and future periods in an aquifer, but also to compare results between different aquifers. The method proposed by Baena-Ruiz et al. (2018) will be adapted to analyze future potential scenarios since, instead of having a single well known series (as in the historical period), an infinite number of potential future series are feasible, and we analyse some of them. The method will be applied to the Plana de Oropesa-Torreblanca case study, where the impacts of different future GC scenarios are compared. A sensitivity analysis is conducted to assess the influence of CC on the simulated scenarios.

2 Methodology

Figure 1 shows the inputs and the method that we propose to follow in order to achieve the novel objective. It allows to identify the steps to follow in order to assess the analyses of impacts of future GC and CC scenarios at aquifer scale (considering adaptation strategies to CC).

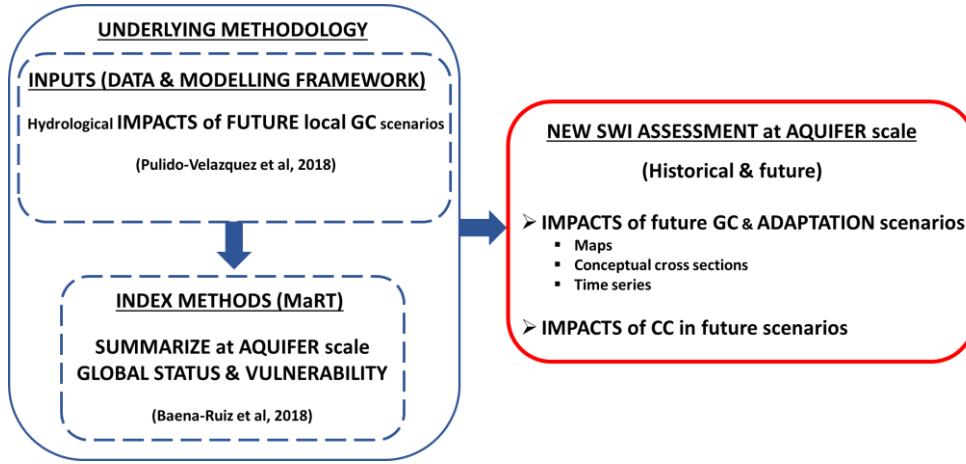


Fig. 1 Flowchart of the proposed methodology

2.1 Impacts of future GC scenarios and adaptation scenarios at aquifer scale

Baena-Ruiz et al. (2018) proposed a method to summarize the dynamic of the historical status and vulnerability to SWI at aquifer scale. It was applied to the Plana de Oropesa Torrablanca aquifer, being the required distributed fields (hydraulic head and chloride concentration) obtained by using a simple interpolation method, which is applied to the in situ measurements. These interpolation approaches cannot be employed to assess future scenarios in which we need physical models to propagate the potential future conditions in order to obtain the cited variable fields. In these cases, the use of a chain of models, which includes a density dependent flow model, will be required to assess those fields (Pulido-Velazquez et al. 2018).

In order to summarize the outputs of the models developed in Pulido-Velazquez et al. (2018) in terms of future SWI results (status and vulnerability) at aquifer scale, we propose to adapt the Baena-Ruiz et al. (2018) method to deal with the particularities of these future potential scenarios. The method will be also employed to analyze future SWI vulnerability taking into account other intrinsic aquifer parameters (aquifer type and conductivity). In order to summarize the results, steady pictures (maps of affected area and 2D conceptual cross sections) and lumped indices will be employed. The method will be implemented in a GIS tool that helps to apply it to other case studies.

The maps of chloride concentration are directly obtained from the physical model from Pulido-Velazquez et al. (2018) both for the historical and future periods.

We will also use the definition of affected volume provided by Baena-Ruiz et al. (2018), which is the volume where the chloride concentration level is above the natural background level.

A conceptual cross-section orthogonal to the coastline will be defined to summarize the SWI status at aquifer scale. It can be calculated for a specific time and/or for the statistics (eg. mean, minimum, and maximum values) of a period (historical and/or future). It represents average affected geometry, including the Penetration (P) and the Affected Thickness (Th_a).

$$P(m) = \frac{\sum V_{i(>V_T)}}{T_{ha} * L_{coast}} \quad (1)$$

Where:

- $V_{i(>V_r)}$ is the storage in each cell (m^3) with a concentration greater than V_r
- $V_{i(>V_r)}(m^3) = S_i(m^2) * b_i(m) * \alpha$;
- V_r = Reference threshold (natural background of the aquifer or vulnerability class);
- L_{coast} is the length of coastline (m);
- S_i is the surface area of each cell in the model (m^2);
- b_i is the saturated thickness at each instant considered (m);
- α is the specific yield;
- T_{ha} is the affected thickness (m). It can be calculated as follow:

$$T_{ha}(m) = \frac{\sum V_{i(>V_r)}}{\sum S_{i(>V_r)}} \quad (2)$$

The affected zone has an increment of concentration (IC) above the natural threshold.

$$IC\left(\frac{mg}{l}\right) = C - V_r \quad (3)$$

Where:

- C=Concentration in the affected volume

$$C\left(\frac{mg}{l}\right) = \frac{\sum(C_{i(>V_r)} * V_{i(>V_r)})}{V_{(>V_r)}} \quad (4)$$

Vulnerability maps were also obtained by applying the GALDIT method (Chachadi and Lobo-Ferreira 2005), which is described in detail in an Appendix. The affected volume is defined as the areas in which the vulnerability is higher than a specific vulnerability class or value (eg. High vulnerability). A conceptual cross section to summarize vulnerability at aquifer scale could be defined following an analogous reasoning to those applied to assess the status (Baena-Ruiz et al. 2018).

The maps and conceptual cross sections will allow to identify the impacts of future GC scenarios on the aquifer in terms of affected volume by a chloride concentration above the natural background or by a high vulnerability, regarding to the historical status. It also allows to compare impacts of different future scenarios on the status and/or vulnerability to SWI.

In order to assess the dynamic-of global status and vulnerability at aquifer scale we analyse time series for two lumped indices: “Ma” and “L_GALDIT” respectively. The “Ma” index is defined as “the total additional mass of chloride that causes the concentration in some areas to exceed the natural threshold” (Baena-Ruiz et al. 2018).

$$Ma\left(\frac{kg}{m}\right) = P(m) * IC\left(\frac{mg}{l}\right) * 10^{-3} * T_{ha}(m) \quad (5)$$

In an analogous way, the “L_GALDIT” is defined as the weighted GALDIT index by the aquifer storage:

$$L_GALDIT = \frac{\sum(G_i * V_i)}{V} \quad (6)$$

where:

- G_i is the value of GALDIT index in each cell (calculated following the GALDIT method explained in Appendix);

- V_i is the storage in each cell;
- V is the total storage in the aquifer;

In this paper the dynamic of the lumped indices is analyzed taking into account the particularities of the future scenarios. In an historical assessment we have a single real climatic series that allows to draw conclusion about the resilience and trend in the aquifer (Baena-Ruiz et al. 2018). But in the assessment of future scenarios infinite potential future series could be feasible (although we finally considered a limited number of them), and, therefore, the summary of the time series analyses should not be performed in the same way.

In this work we propose to use a new index, the recovery rate, which can be obtained from the evolution of the global indices Ma and L_GALDIT . It is defined as the mean reduction in the index value in a given period. It may be represented in a box-whisker plot in order to provide a statistical assessment of the SWI dynamic in future horizons. The recovery rate for Ma index, which represents the mean recovery velocity of the system, is defined as follow:

$$Recovery\ rate = \frac{Ma_t - Ma_{t-n}}{n} \quad (7)$$

Where:

- Ma_t is the global status (Ma index) in a specific date “ t ”;
- Ma_{t-n} is the global status (Ma index) in a specific date “ $t-n$ ”;
- n is the difference between the date “ t ” and “ $t-n$ ” (at monthly scale);

2.2 Impacts of CC in future scenarios

The impacts of CC are analysed through a sensitivity analysis in order to quantify the influence of the CC on the simulated GC scenarios. We compare results obtained for the GC scenarios, which include both, future LULC and potential future CC scenarios, and a future LULC scenario defined assuming that there is not CC. The relative differences in the global status ($Ma\%$) and GW vulnerability ($L_GALDIT\%$) for those scenarios are obtained with the next expressions:

$$Ma\% = \left(\frac{Ma(x) - Ma}{Ma} \right) * 100 \quad (8)$$

$$L_GALDIT\% = \left(\frac{L_GALDIT(x) - L_GALDIT}{L_GALDIT} \right) * 100 \quad (9)$$

Where:

- $Ma\%$ is the variation of the global status (Ma index) due to CC, expressed as a percentage;
- $Ma(x)$ is the average global status (Ma index) for each GC scenario;
- Ma is the average global status index (Ma index) for LULC scenario;
- $L_GALDIT\%$ is the variation of the vulnerability (L_GALDIT index) due to CC, expressed as a percentage;
- $L_GALDIT(x)$ is the average vulnerability (L_GALDIT index) for each GC scenario;
- L_GALDIT is the average vulnerability index (L_GALDIT) for LULC scenario;

3 Description of the study area and available information

The Plana de Oropesa-Torreblanca is a detrital Mediterranean aquifer which extends over 75 km² in the province of Castellon in Spain. It has a length of 21 km and a width of between 2.5 and 6 km. This Plio-Quaternary aquifer is unconfined and heterogeneous and consist on a silty clay matrix with gravel and sand levels. The aquifer is wedge-shaped and it can reach 90 m thick near to the coast. The transmissivity varies between 300-1000 m²/day (Renau-Pruñonosa et al. 2016) and the storage coefficient ranges from 2-12%. Figure 2 show the location and hydrogeology of the aquifer.

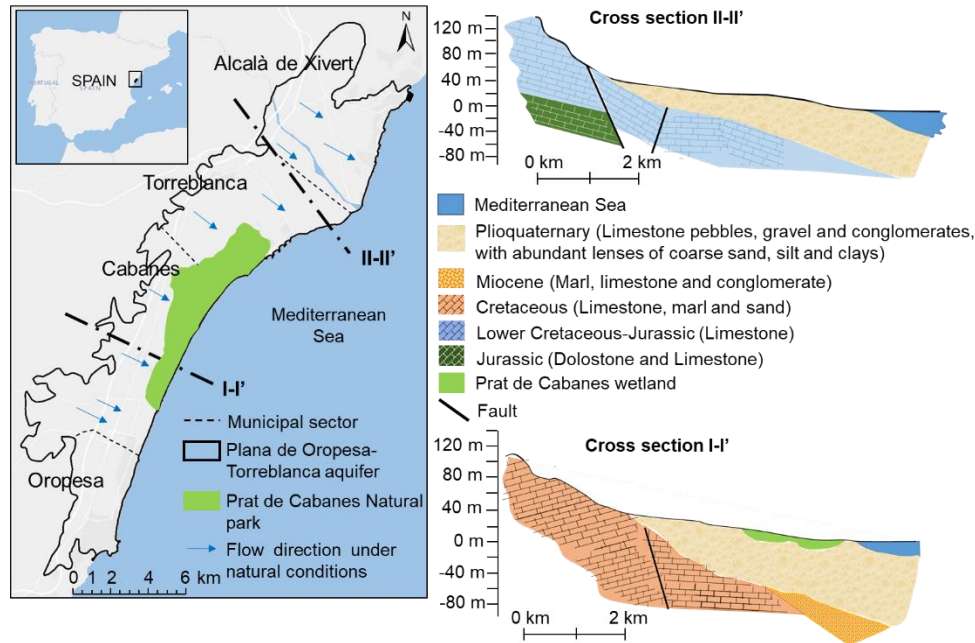


Fig. 2 Situation of the study area and hydrogeological sections

The wetland Prat de Cabanes is situated in the central zone of the Plana, parallel to coastline. It extends approximately 9 km². Its formation is due to the clogging of an old lagoon that reaches several meters thick. This wetland is separated from the sea by a coastal bar of sorted pebbles.

The aquifer is laterally connected with adjacent aquifers which provide inflows to the system (Giménez and Morell 1997). In addition, the aquifer is fed by infiltration of precipitation and irrigation returns. Pumped abstractions, drains to the Prat de Cabanes wetland and GW discharges to sea compound the outflows to the system (Pulido-Velazquez et al. 2018). Groundwater follows a NW-SE direction under natural conditions (Giménez and Morell 1997; Renau-Pruñonosa et al. 2016).

3.1 Data: hydro-climatic conditions, LULC, and pumping data

Historical temperature and precipitation data come from the Spain02 project dataset (Herrera et al. 2012; Herrera et al. 2016). The monthly average precipitation in the period 1973-2010 varied between 20-30 mm in summer and it reached almost 80 mm in the rainiest month. The monthly average temperature went from 12°C to 28°C throughout the year.

In the study area there have been important land use changes from 70's. Before 1995 there was a significant transformation in the crop water demand due to new irrigated lands appeared. From this date to 2010 the main change was an increase of artificial surfaces (mainly residential LULC along the coast) (Feranec et al. 2010) and an improvement in the efficiency of irrigation techniques (CHJ 2015).

Pumping was deduced from historical data. The mean annual pumping in the historical period is 22 hm³/year approximately. The land use changes are reflected in the evolution of total pumping in the Plana de Oropesa-Torreblanca aquifer. First, the transformation into irrigated croplands from 1975 to 1995 produce an increase in pumping from 15 hm³/year to a maximum of 35 hm³/year. It produced a drop in GW level and higher SWI problems. Later the transformation of irrigation techniques and land uses led to a reduction in pumping to a minimum rate around 13 hm³/year (Pulido-Velazquez et al. 2018).

3.2 Future LULC scenarios. Implementation of adaptation measures

The future LULC change scenarios are defined taking into account the urban development planning. It has projected land uses changes that are mainly the construction of golf courses and the transformation of the land use from agricultural to residential. The main changes in each municipality are the following (Figure 3):

- In Alcalà de Xivert there are not expected significant changes.
- The Urban Development Plan for Torreblanca contemplates the land use change from agricultural to residential (70% of the total area of municipality will be classified as buildable residential or industrial). In the coastal area, north of Prat de Cabanes Natural Park, Doña Blanca Golf Course has been projected.
- In Cabanes and Oropesa municipalities the integrated development plan Marina d'Or Golf has been approved. It will include three golf courses, private urbanization, hotels and landscapes areas.

In order to mitigate the impacts of CC on the GC scenarios, we have also considered the next adaptation measures to increase complementary resources. These adaptation measures were also requirements included in the Urban Development Plan: the irrigation in the golf courses must be supplied by reclaimed water from residential use and water from desalinization plant will be used for human consumption.

In order to make the model more realistic, we assume that these land use changes would be executed gradually from 2015 to 2035. Figure 3 shows the evolution of changes in time.

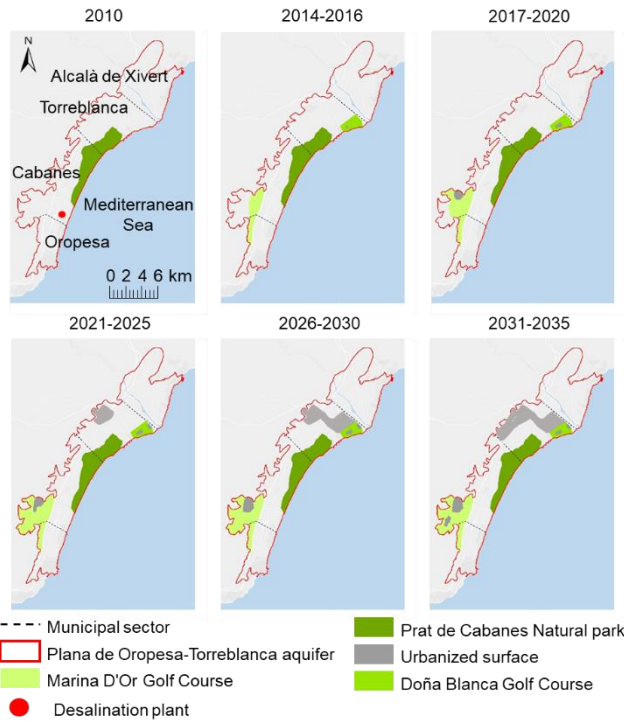


Fig. 3 Expected land use changes in the Plana de Oropesa-Torreblanca aquifer (2010-2035)

3.3 Future GC scenarios and propagation of impacts

Pulido-Velazquez et al. (2018) generated four potential future climate scenarios (CC scenarios) for Plana de Oropesa-Torreblanca aquifer by employing control and future climatic series data simulated with RCMs in the framework of the CORDEX project (2013) for the most pessimistic emission scenario RCP8.5. All these climate scenarios showed an increase in mean temperature ($\approx 1^\circ\text{C}$ on average) with respect to the historical period (1973-2010). The future mean rainfall also showed a decrease (up to 24% monthly) for every month except September and October, in which a relative increase was predicted (up to 30%). These months are the rainiest in the study area and frequent storms occur. The local future scenarios show an increment in these extreme rainfall events (Pulido-Velazquez et al. 2018).

These climate scenarios were combined with a land use change scenario (Section 3.2), including some adaptation measures oriented to define more feasible/realistic future scenarios in accordance with the urban development planning, in which complementary resources will be incorporated within the system (water reuse and water from desalination plants for human consumption in the new urban areas).

The next scenarios were finally analyzed:

- Four GC scenarios (GC1, GC2, GC3, GC4) defined by combining four climate scenarios with the future LULC scenario;
- The LULC scenario was defined assuming that there is not CC;
- In the baseline scenario we assume that the LULC will be maintained as in 2010 and the historical hydro-climatic characteristics will be analogous to those of the period 2006-2010.

A modelling framework was defined with a chain of auxiliary models (rainfall-recharge models, crop irrigation requirements, and irrigation returns models) that provide the inputs to a density dependent flow model (SEAWAT). It was calibrated from the estimated historical pumping and recharge (deduced from the climate and land use data) (Section 3.1 and 3.2) in the aquifer and the hydraulic head and chloride concentration data available in the observation points during the period 1981-2010. Data from 1973 to 1981 were used to validate it. This model was used to propagate the impacts of the plausible future GC scenarios. It provided a spatio-temporal distribution of the chloride concentration and the hydraulic head evolution for the different GC scenarios. The available volume of resource can be estimated from the hydraulic head and the aquifer geometry. The water budget for each GC scenario was also calculated by using SEAWAT model with the Visual Modflow interface. It allows to understand the system dynamic due to CC and LULC changes.

4 Results and discussion

The proposed methodology is applied to Plana de Oropesa-Torreblanca aquifer in order to assess impacts of GC scenarios on SWI at aquifer scale.

4.1 Impacts of future GC scenarios and adaptation scenarios at aquifer scale

The six scenarios defined have been simulated by using SEAWAT model. Field maps of chloride concentration and hydraulic head were previously obtained as output of this model. The area affected by SWI in the aquifer has been identified taking into account the natural background in the aquifer, which is 1100 mg/l of chloride concentration (CHJ 2015; Baena-Ruiz et al. 2018). Figure 4 shows the largest affected areas in the historical period and in the future period for different scenarios (future baseline, LULC and GC4). The future baseline and LULC scenarios (defined including the cited adaptation measures) do not show a clear deterioration of the aquifer. The worst hypothetical scenario is the GC4, in which practically the whole aquifer would have a chloride concentration above 1100 mg/l. In GC4 scenario the aquifer would suffer an increment of 10% in the affected volume compared to the baseline scenario in 2010 (the started point of the future period in this study). As can be seen in Figure 4, the aquifer already had a large affected volume in 2010 (more than 80%) (Pulido-Velazquez et al, 2018).

The affected areas in terms of high vulnerability is pretty similar for the future LULC and baseline scenarios. The GC4 scenario shows a zone of high vulnerability at the north of the aquifer that corresponds with an area with high conductivity.

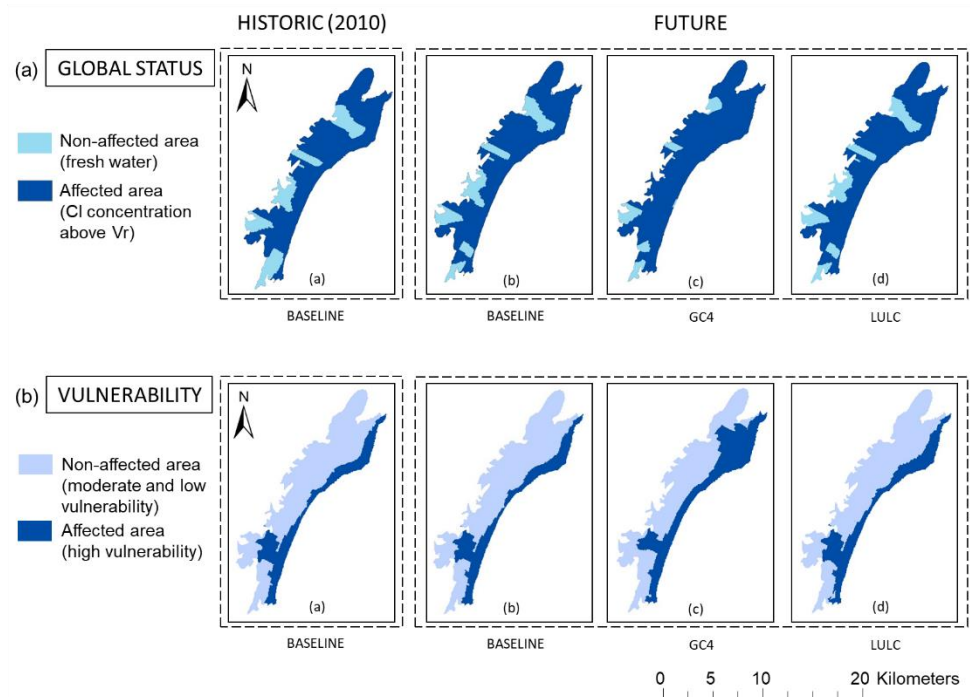


Fig. 4 Maps of affected areas in the years with the largest affected volume (a) chloride concentration and (b) vulnerability

Due to the applied adaptation strategies, the considered changes in land use (LULC scenario) would not produce a high increase in the maximum values of affected volume. The reduction of pumping in this LULC scenario would reduce the amplitude of the fluctuations of the affected volumes within the aquifer (Figure 5(a) and 5(b)). Those non-distributed stresses cause that faster fluctuations on the aquifer status. Note that the LULC scenarios are defined assuming that the adaptation measures contemplated within the Urban Development Plan (reduction of pumping due to water reuse and water desalination) will be applied, which would help to reduce the potential impacts of these LULC scenario on SWI. On the other hand, the waterproofing due to the increase in the residential use contributes to a lower recharge (increasing slightly the mean sea water intrusion volume) in the future and the urbanized area in Torreblanca would continue being supplied with GW.

The GC scenarios (GC1, GC2, GC3, GC4) show an increase in their variability and in the affected volume regarding to the baseline scenario, which is obtained from the output of the calibrated SEAWAT model in the historical period and considering the LULC remains as in 2010 and there is not CC in the future. Taking into account that this increase is not observed in the LULC scenarios, it is mainly due to the impact of CC (Figure 5(a) and 5(b)). The decrease in pumping in GC scenarios is less significant than the reduction of the inflows in the aquifer (lateral GW inflow + recharge) producing an increase in the affected volume.

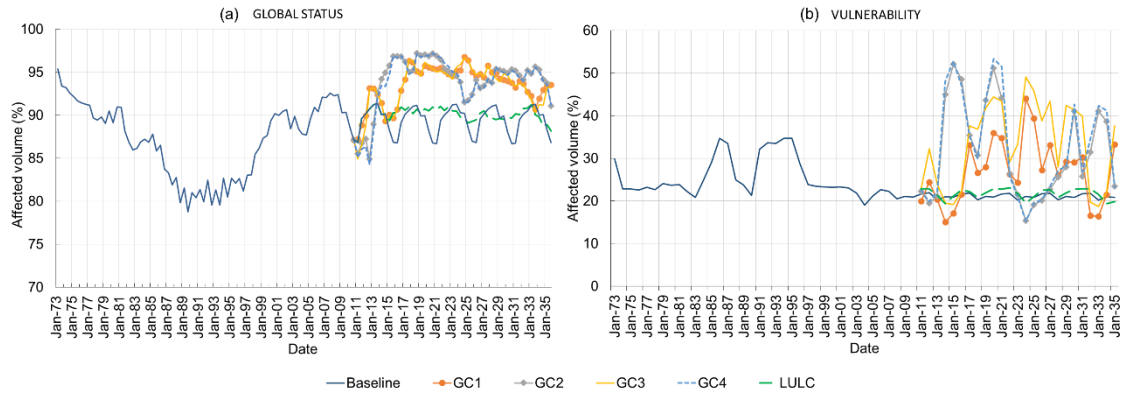


Fig. 5 Evolution of (a) affected volume by a chloride concentration above 1100 mg/l and (b) affected volume by high vulnerability

All potential future GC scenarios would undergo an increase in average and maximum affected conceptual cross section, although the aquifer was largely affected in the historical period (Pulido-Velazquez et al. 2018). The LULC scenario (including adaptation measures) does not show substantial changes in the affected areas with respect the baseline scenario, while GC3 and GC4 scenarios involve the largest affected area in the aquifer (Figure 6). The expected future climatic conditions would have a negative impact in the salinization of the aquifer resources and in its vulnerability to SWI.


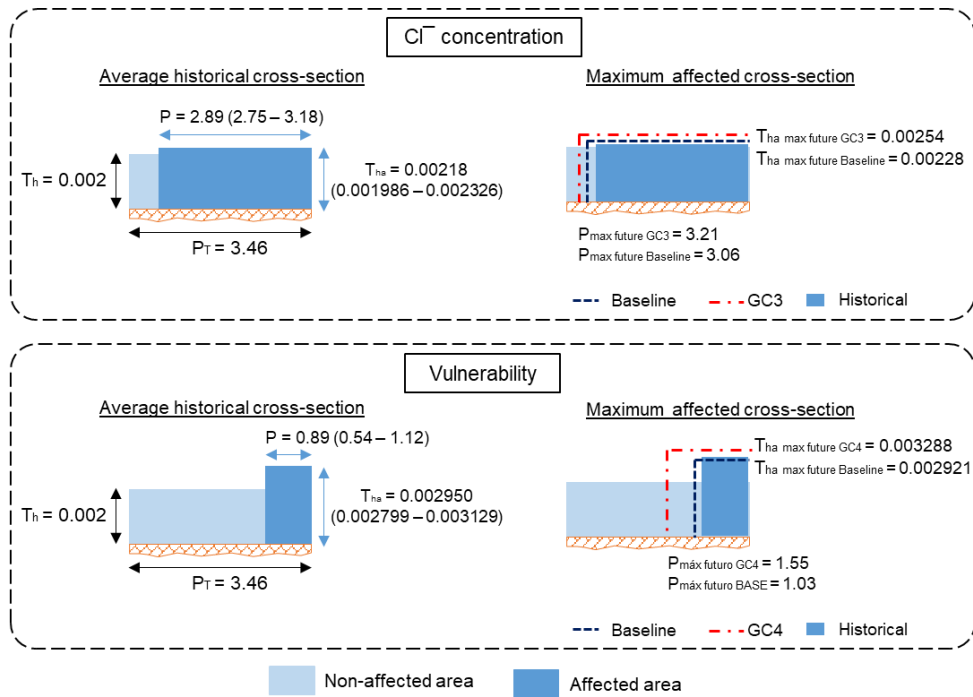


Fig. 6 Average historical and maximum future affected cross-sections (linear dimensions in kilometers. Vertical exaggeration scale: 500)

The global indices (Ma and L_GALDIT) calculated for the baseline, LULC and the GC scenarios (Figure 7) show that LULC changes would not produce a clear deterioration of the global status and vulnerability of the aquifer. The continuous growing trend (in the LULC and GC scenarios) in the Ma index observed from 2025 (Figure 7(b)) are related with the impacts of the planned urbanization of a large area in Torrealanca, which produces an increase of chloride concentrations. GC scenarios forecast a large affected

1 mass in the future, which is mainly due to the potential climatic conditions. The maximum values of the
 2 lumped indices (Ma and L_GALDIT) during the GC scenarios are induced by periods with high
 3 temperature and low precipitation.

4 The LULC scenario does not produce significant changes in the vulnerability. The vulnerability is more
 5 sensitive to the GC scenarios. All of them show a significant increase in its variability and a mean increase
 6 in the vulnerability, but there are some periods in which the vulnerability even decreases. (Figure 7(a)).

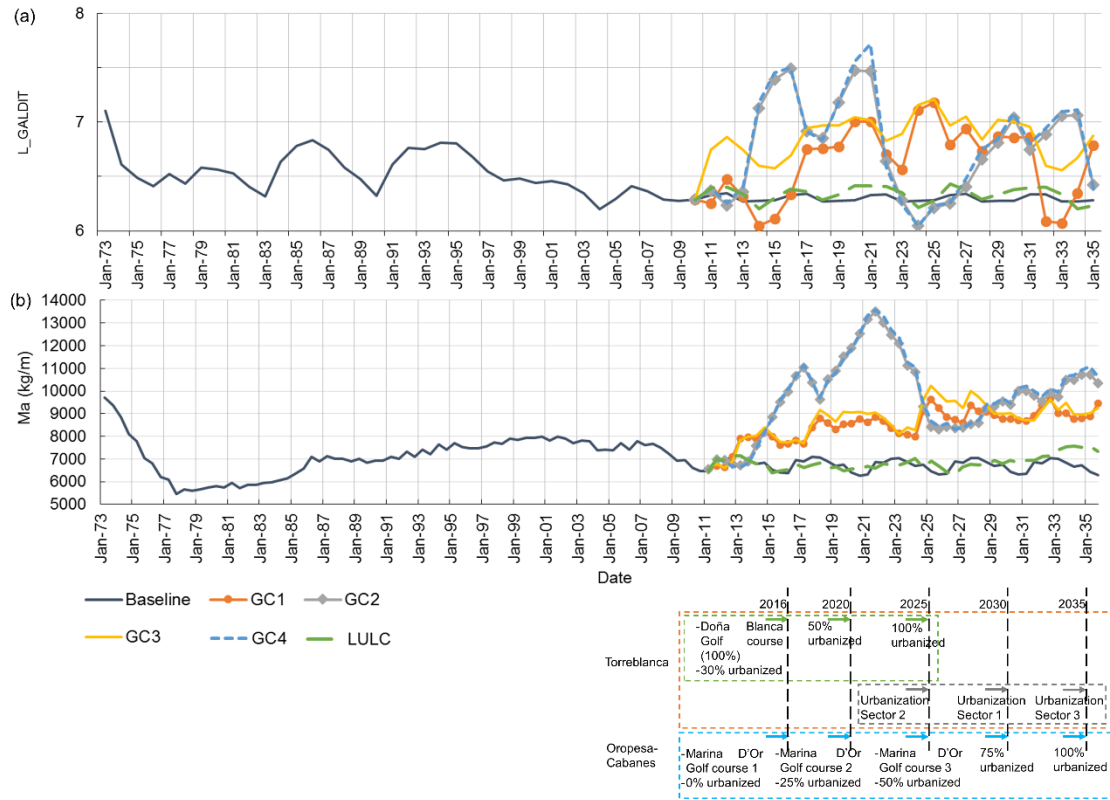

7
 8 **Fig. 7** Lumped indices for vulnerability and global status: (a) L_GALDIT index; (b) Ma index

9 The resilience and trend of the lumped indices were analysed for the historical period in Baena-Ruiz et al.
 10 (2018). In CC studies we cannot analyze the trend of the indices due to the uncertainty of the chronological
 11 sequence. Instead the recovery rate is assessed as described in the methodology. Figure 8 shows that the
 12 aquifer is able to respond to the severe climatic conditions estimated in GC scenarios. Based on the
 13 calibrated model, GC2 and GC4 scenarios present more extreme values but also they show higher recovery
 14 rates.

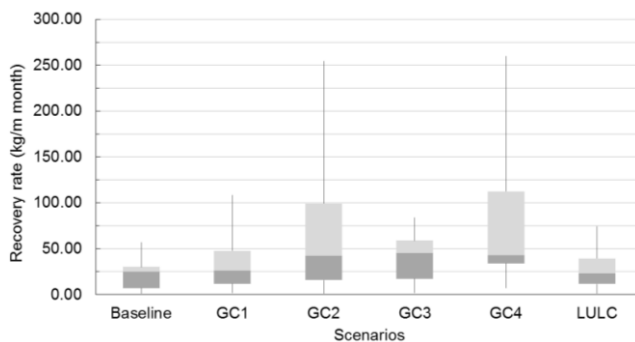


Fig. 8 Statistics of recovery rate for baseline, LULC and GC scenarios

4.2 Impacts of CC in future scenarios

A sensitivity analysis is carried out to evaluate the impact of CC on global status and vulnerability to SWI at aquifer scale. The LULC (without CC) scenario provides us information about the sensitivity of the results to CC.

Figure 9 represents the increase (%) in Ma and L_GALDIT due to the CC. It shows that CC would have a significant impact in Ma index (related to global status of the aquifer). Vulnerability is less sensitive to CC due to other factors that are used in the index (conductivity and distance from the coast) which have greater weight and are invariant in time.

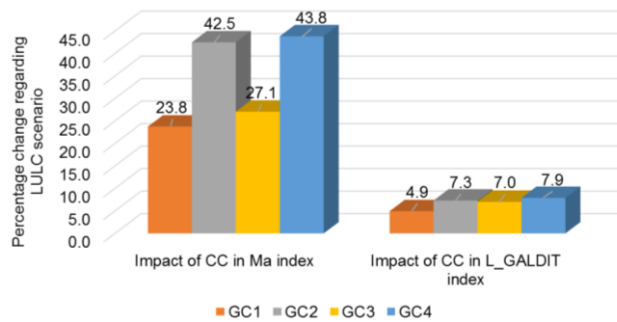


Fig. 9 Sensitivity analysis of CC in lumped indices

Taking into account these results, CC would produce significant impacts in global status of the aquifer.

The mean annual values of the budget for the six scenarios was calculated running the density dependent flow model in Visual Modflow (Pulido-Velazquez et al. 2018). Figure 10 shows the mean annual values of the affected components of the budget for the six scenarios. It also includes the deficit in the resource produced in the system due to both GC and/or exploitation in this aquifer. Red bars in Figure 10 show the difference between total inflows and pumping.

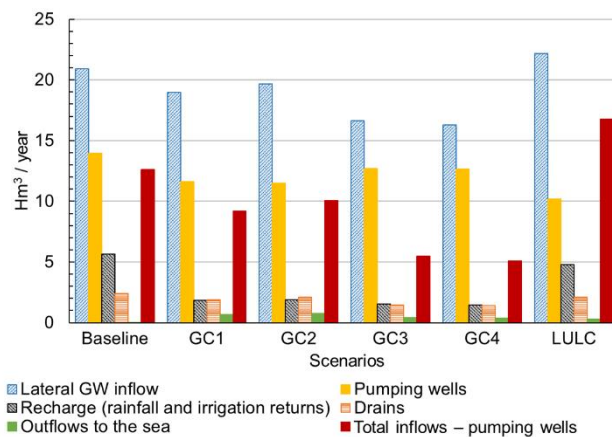


Fig. 10 Mean annual values of the budget four GC, LULC and Baseline scenarios

In the future LULC scenario and the four GC scenarios, the pumping is reduced due to changes in land use and the proposed adaptation measures (water reuse for irrigation and water from desalinization plant for human consumption in the new urban areas) defined in accordance with the Urban Development Plan, but

also the recharge (direct and lateral) decreases due largely to CC and waterproofing of the land in the Torreblanca area and urbanizations.

Figure 10 also shows that the GC scenarios (specially GC4) experiment a larger reduction in the total budget than the LULC scenario. Therefore, the impact of CC is greater than the improvement caused by LULC. This result is consistent with Figure 4, where GC4 would provide the largest affected area. It is due to, in GC4 scenario, pumping would decrease slightly due to LULC changes and adaptation measures, but the inflows (lateral and recharge) decrease still further (Figure 10).

Therefore, in summary, we have obtained results to analyse potential future impact of GC and LULC scenarios on SWI in a coastal aquifer. They show a significant increase in the magnitude and variability of the affected volume for the GC scenarios regarding to the baseline scenario. Pulido-Velazquez et al (2018) also highlighted the higher variability observed for these GC scenarios when they analysed the flow budget.

The potential future scenarios would produce a negative impact in the salinization of the aquifer resources and in its vulnerability to SWI, which is in agreement with results observed in previous studies in the Mediterranean area (Mabrouk et al. 2018). The decrease in recharge will exacerbate SWI problems (Liu et al. 2008; Petty 2011), producing a great effect in the affected mass of the aquifer, whose distribution and magnitude will depend on the scenarios (Van and Lee 2015).

The sensitivity analysis performed to assess the impacts of CC shows that it has a higher influence on aquifer status than in its vulnerability. It is due to GALDIT does not consider explicitly the recharge variable, although it controls aquifer salinization. These conclusions are in agreement with other previous study (Benini et al. 2016).

Finally, the comparison between LULC and baseline scenarios reveals that pumping is a key factor in SWI problem in coastal areas. This conclusion is supported by other authors (Van and Lee 2015).

4.3 Hypothesis and limitations

In this section we summarise the hypothesis assumed in this analysis. They have been classified in two categories:

Inputs for the method:

- Historical climatic data are taken from Spain02 dataset. They are considered to properly fit the historical period (1973-2010).
- LULC is supposed to be executed gradually from 2015 to 2035.
- CC scenarios data for the period (2011-2035) were taken considering the most pessimistic emission scenario published by the IPCC in the AR5 report (RPC8.5) and many assumptions were performed in Pulido-Velazquez et al. (2018).
- The generation of local CC scenarios and the propagation of its impacts has been assessed through a chain of auxiliary models and a SEAWAT model whose reliability depends on assumptions and data considered in calibration (Pulido-Velazquez et al. 2018). We consider as inputs of the proposed method the

local CC scenarios and their impacts obtained by propagating with the modelling framework (Pulido-Velazquez et al. 2018).

Method:

- The natural background or reference level to identify SWI where taken from CHJ (2015). Results are sensitive to the adopted value (Baena-Ruiz et al. 2018).

- This general method provides lumped results and information about local potential impacts may be lost in the aggregation process.

5 Conclusions

In this paper an integrated methodology is applied in order to assess the hydrological impacts of GC scenarios on the global status and vulnerability to SWI at aquifer scale.

The novelty of this paper consists on the harmonization of the impacts of GC scenarios in the global status and vulnerability to SWI at aquifer scale including some management strategies. It allows to compare the significance of the SWI problems in different historical and future periods for an aquifer and between different aquifers. The effect of CC in the GC scenarios is also analysed. The method has been implemented in a GIS tool that helps to apply it to any case study.

Results show that GC scenarios would imply a greater deterioration in the aquifer than LULC scenario. The adaptation strategies will produce a reduction of pumping in some areas of the aquifer, which would reduce the impacts of the potential future LULC and GC scenarios. The lumped indices reveal that GC would involve more variability in SWI problems (global status and vulnerability) and CC would increase the degradation of the aquifer. On average it is expected a greater area affected by intrusion and an extreme climatic conditions might produce an increase of the aquifer more vulnerable. GC would produce a greater impact in SWI global status than in the aquifer vulnerability. Nevertheless the resilience capacity of the aquifer would allow to recover from the impacts of the extreme climatic conditions.

The main contribution of this paper is the analysis of impacts of future GC scenarios in the SWI problem at aquifer scale. It allows to obtain general conclusions about the global status and vulnerability and to assess the effects of CC and adaptation strategies. Due to the sensitivity of the method to the natural background, a proper assessment of it is important to achieve realistic results. This method also helps to understand the effect of adaptation measures in order to cope with the growing water requirements. It reveals that complementary adaptation strategies are needed in order to cope with CC.

References

Baena-Ruiz L, Pulido-Velazquez D, Collados-Lara AJ, Renau-Pruñonosa A, Morell I (2018) Global Assessment of Seawater Intrusion Problems (Status and Vulnerability). *Water Resources Management* 32:2681-2700. <https://doi.org/10.1007/s11269-018-1952-2>

- Benini L, Antonellini M, Laghi L (2016) Assessment of water resources availability and groundwater salinization in future climate and land use change scenarios: A case study from a coastal drainage basin in Italy. *Water Resources Management* 30:731–745. <https://doi.org/10.1007/s11269-015-1187-4>
- Chachadi AG, Lobo-Ferreira JP (2005) Assessing aquifer vulnerability to sea-water intrusion using GALDIT method: part 2 – GALDIT indicator descriptions. IAHS and LNEC, Proceedings of the 4th The Fourth Inter Celtic Colloquium on Hydrology and Management of Water Resources, held at Universidade do Minho, Guimarães, Portugal, July 11–13, 2005
- CHJ (Júcar Water Agency) (2015) Júcar River Basin Plan. Confederación Hidrográfica del Júcar <https://www.chj.es/es-es/medioambiente/planificacionhidrologica/Paginas/PHC-2015-2021-Plan-Hidrologico-cuenca.aspx>. Accessed 21 October 2019
- Collados-Lara A.-J, Pulido-Velazquez D, Pardo-Igúzquiza E (2018) An Integrated Statistical Method to Generate Potential Future Climate Scenarios to Analyse Droughts. *Water* 10:1224-1248. <https://doi.org/10.3390/w10091224>
- CORDEX PROJECT (2013) The Coordinated Regional Climate Downscaling Experiment CORDEX. Program sponsored by 20 World Climate Research Program (WCRP). <http://wcrp-cordex.ipsl.jussieu.fr/>. Accessed 21 October 2019
- Escriva-Bou A, Pulido-Velazquez M, Pulido-Velazquez D (2017). Economic value of climate change adaptation strategies for water management in Spain's Jucar basin. *Journal of Water Resources Planning and Management*, 143(5), 04017005. [https://doi.org/10.1061/\(ASCE\)WR.1943-5452.0000735](https://doi.org/10.1061/(ASCE)WR.1943-5452.0000735)
- Feranec J, Jaffrain G, Soukup T, Hazeu G (2010) Determining changes and flows in European landscapes 1990–2000 using CORINE land cover data. *Applied Geography*, 30(1):19-35. <https://doi.org/10.1016/j.apgeog.2009.07.003>
- Ferguson G, Gleeson T (2012) Vulnerability of coastal aquifers to groundwater use and climate change. *Nature Climate Change*, 2(5):342-345
- Giménez E, Morell I (1997) Hydrogeochemical analysis of salinization processes in the coastal aquifer of Oropesa (Castellón, Spain). *Environmental Geology*, 29(1-2):118–131. <https://doi.org/10.1007/s002540050110>

- Grundmann J, Schütze N, Schmitz G. H, Al-Shaqsi S (2012) Towards an integrated arid zone water management using simulation-based optimisation. *Environmental Earth Sciences*, 65(5):1381-1394
- Herrera S, Gutiérrez J.M, Ancell R, Pons M.R, Frías M.D, Fernández J (2012) Development and Analysis of a 50 year high-resolution daily gridded precipitation dataset over Spain (Spain02). *International Journal of Climatology*, 32:74-85. <https://doi.org/10.1002/joc.2256>
- Herrera S, Fernández J, Gutiérrez J. M (2016) Update of the Spain02 Gridded Observational Dataset for Euro-CORDEX evaluation: Assessing the Effect of the Interpolation Methodology. *International Journal of Climatology*, 36:900–908. <https://doi.org/10.1002/joc.4391>
- Huang L, Zeng G, Liang J, Hua S, Yuan Y, Li X, Liu J (2017) Combined impacts of land use and climate change in the modeling of future groundwater vulnerability. *Journal of Hydrologic Engineering*, 22(7):05017007. [https://doi.org/10.1061/\(ASCE\)HE.1943-5584.0001493](https://doi.org/10.1061/(ASCE)HE.1943-5584.0001493)
- Kløve B, Ala-Aho P, Bertrand G, Gurdak J. J, Kupfersberger H, Kværner J, Uvo C. B (2014) Climate change impacts on groundwater and dependent ecosystems. *Journal of Hydrology*, 518:250-266. <https://doi.org/10.1016/j.jhydrol.2013.06.037>
- Koutroulis A. G, Papadimitriou L. V, Grillakis M. G, Tsanis I. K, Wyser K, Betts R. A (2018) Freshwater vulnerability under high end climate change. A pan-European assessment. *Science of the Total Environment*, 613:271-286. <https://doi.org/10.1016/j.scitotenv.2017.09.074>
- Li R, Merchant J. W (2013) Modeling vulnerability of groundwater to pollution under future scenarios of climate change and biofuels-related land use change: A case study in North Dakota, USA. *Science of the Total Environment*, 447:32-45. <https://doi.org/10.1016/j.scitotenv.2013.01.011>
- Liu J, Rich K, Zheng C (2008) Sustainability analysis of groundwater resources in a coastal aquifer, Alabama. *Environmental Geology*, 54(1):43-52. <https://doi.org/10.1007/s00254-007-0791-x>
- Loáiciga H. A, Pingel T. J, Garcia E. S (2012) Sea Water Intrusion by Sea-Level Rise: Scenarios for the 21st Century. *Groundwater*, 50(1):37-47. <https://doi.org/10.1111/j.1745-6584.2011.00800.x>

- Luoma S, Okkonen J, Korkka-Niemi K (2017) Comparison of the AVI, modified SINTACS and GALDIT vulnerability methods under future climate-change scenarios for a shallow low-lying coastal aquifer in southern Finland. *Hydrogeology Journal*, 25(1):203-222. <https://doi.org/10.1007/s10040-016-1471-2>
- Mabrouk M, Jonoski A, HP Oude Essink G, Uhlenbrook S (2018) Impacts of Sea Level Rise and Groundwater Extraction Scenarios on Fresh Groundwater Resources in the Nile Delta Governorates, Egypt. *Water*, 10(11):1690. <https://doi.org/10.3390/w10111690>
- McEvoy J, Wilder M, 2012. Discourse and desalination: potential impacts of proposed climate change adaptation interventions in the Arizona–Sonora border region. *Global Environmental Change* 22 (2012):353–363. <https://doi.org/10.1016/j.gloenvcha.2011.11.001>
- Petty K (2011) The Effects of Land Cover, Climate, and Urbanization on Groundwater Resources in Dauphin Island. Dissertation, Auburn University (Alabama).
- Pulido-Velazquez D, Garrote L, Andreu J, Martin-Carrasco FJ, Iglesias A (2011) A methodology to diagnose the effect of climate change and to identify adaptive strategies to reduce its impacts in conjunctive-use systems at basin scale. *Journal of Hydrology* 405:110–122. <https://doi.org/10.1016/j.jhydrol.2011.05.014>
- Pulido-Velazquez D, Renau-Pruñonosa A, Llopis-Albert C, Morell I, Collados-Lara A. J, Senent-Aparicio J, Baena-Ruiz L (2018) Integrated assessment of future potential global change scenarios and their hydrological impacts in coastal aquifers—a new tool to analyse management alternatives in the Plana Oropesa-Torreblanca aquifer. *Hydrology and Earth System Sciences*, 22(5):3053. <https://doi.org/10.5194/hess-22-3053-2018>
- Ranjan S. P, Kazama S, Sawamoto M (2006) Effects of climate and land use changes on groundwater resources in coastal aquifers. *Journal of Environmental Management*, 80(1):25-35. <https://doi.org/10.1016/j.jenvman.2005.08.008>
- Rasmussen P, Sonnenborg T.O, Goncear G, Hinsby K (2013) Assessing impacts of climate change, SLR, and drainage canals on saltwater intrusion to coastal aquifer, *Hydrology and Earth System Sciences*, 17:421-443. <https://doi.org/10.5194/hess-17-421-2013>

- Renau-Pruñonosa A, Morell I, Pulido-Velazquez D (2016) A methodology to analyse and assess pumping management strategies in coastal aquifers to avoid degradation due to seawater intrusion problems, *Water Resources Management*, 30(13):4823-4837. <http://dx.doi.org/10.1007/s11269-016-1455-y>
- Robins N.S, Jones H.K, Ellis J (1999) An aquifer management case study- The Chalk of the English South Downs, *Water Resources Management*, 13(3):205-218. <https://doi.org/10.1023/A:1008101727356>
- Romanazzi A, Gentile F, Polemio M (2015) Modelling and management of a Mediterranean karstic coastal aquifer under the effects of seawater intrusion and climate change. *Environmental Earth Sciences*, 74(1):115-128. <https://doi.org/10.1007/s12665-015-4423-6>
- Sola F, Vallejos A, Moreno L, López-Geta J.A, Pulido-Bosch A (2013) Identification of hydrogeochemical process linked to marine intrusion induced by pumping of a semi-confined Mediterranean coastal aquifer, *International Journal of Environmental Science and Technology*, 10(1):63-76. <https://doi.org/10.1007/s13762-012-0087-x>
- Trinh L.T, Nguyen G, Vu H, Van Der Steen P, Lens R.N.L (2012) Climate change adaptation indicators to assess wastewater management and reuse options in the Mekong Delta, Vietnam. *Water Resour. Manag.* 27 (5):1175–1191. <https://doi.org/10.1007/s11269-012-0227-6>
- Van Pham H, Lee S. I (2015) Assessment of seawater intrusion potential from sea-level rise and groundwater extraction in a coastal aquifer. *Desalination and Water Treatment*, 53(9):2324-2338. <https://doi.org/10.1080/19443994.2014.971617>
- Werner A. D, Simmons C. T (2009) Impact of sea-level rise on sea water intrusion in coastal aquifers. *Groundwater*, 47(2):197-204. <https://doi.org/10.1111/j.1745-6584.2008.00535.x>
- Water Framework Directive (WFD) (2000) Directiva 2000/60/CE del Parlamento Europeo y del Consejo de 23 de Octubre de 2000. *Diario Oficial de las Comunidades Europeas* de 22/12/2000. L 327/ 1–327/32

1

2

3

4

7

9

10

11

12

- 13

- 4

- 15